
DISH AVALANCHE AUTOMOTIVE RECTIFIER

ADRS30L	**AVALANCHE VOLTAGE**	**20 to 24 Volts**
ADR30L	**CURRENT**	**30 Amperes**

Technical Specifecation:

Features:

- High power capability
- Economical
- Avalanche Voltage: 20V to 24V
- Glass passivated chip

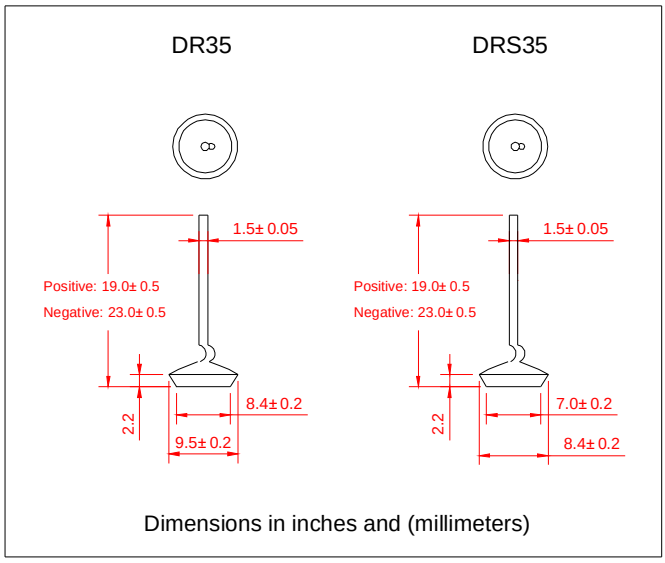

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: Copper case
- Epoxy: UL94-0 rate flame ratardant
- Polarity: As marked of case bottom
- Technology cell vacuum soldered
- Lead: Plated slug, solderable per MIL-STD-202E Method 208C
- Weight: 0.032 ounce 0.9 Grams (ADRS)
  0.035 ounce 1.0 Grams (ADR)


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25℃ ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		ADRS30L/ADR30L			
Electrical Characteristics @ 25℃	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RRM} V_{DC}		17 17 17		Volts
Average Rectified Forward Current (Tc=125℃)	Io		30		Amps
Repetitive Peak Reverse Surge Current Tc=10msec Dury Cycle＜1%	I_{RSM}		30		Amps
Breakdown Voltage (Vbr@ir=100mA, Tc=25℃) Ir=90Amps, Tc=150℃, PW=80usec	Vbr1 Vbr2	20	22	24 32	Volts Volts
Forward Voltage Drop @If=100Amps＜300usec	V_F		1.05	1.10	Volts
Peak Forward Surge Current	I_{FSM}		400		Amps
Reverse Leakage (V_R=17Vdc) T_A=25℃	I_R		1.0	2.0	uAmps
Operating and Storage Junction Temperature Range	T_J ,T_{STG}		-65 to +175		℃

Notes: 1. Enough heatsink must be considered in application.

Fig.1



Surge current characteristics

E-mail: sales@cnmic.com **Web Site: www.cnmic.com**