



S1ABF-PJ thru S1MBF-PJ

GENERAL PURPOSE SILICON RECTIFIERS

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

MECHANICAL DATA

- ◆ Case: SMBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.057 grams

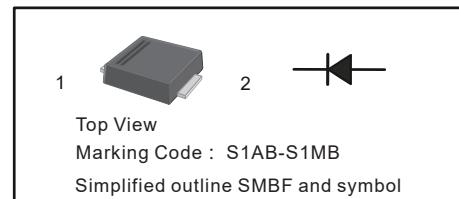

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	S1ABF-PJ	S1BBF-PJ	S1DBF-PJ	S1GBF-PJ	S1JBF-PJ	S1KBF-PJ	S1MBF-PJ	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_c=125^\circ C$	$I_{F(AV)}$				1				A
Peak Forward Surge Current (Note1)	I_{FSM}				30				A
Maximum Forward Voltage at 1.0 A	V_F				1.1				V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^\circ C$ $T_A=125^\circ C$	I_R				5	50			uA
Typical Junction Capacitance (Note2)	C_J				15				pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$				75				°C/W
Operating and Storage Temperature Range	T_J, T_{STG}				-55 to +150				°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4V D.C.

3. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



S1ABF-PJ thru S1MBF-PJ

GENERAL PURPOSE SILICON RECTIFIERS

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

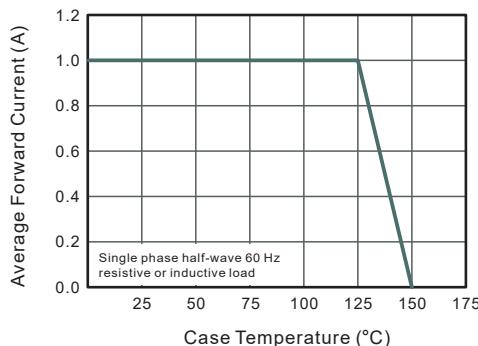


Fig.2 Typical Reverse Characteristics

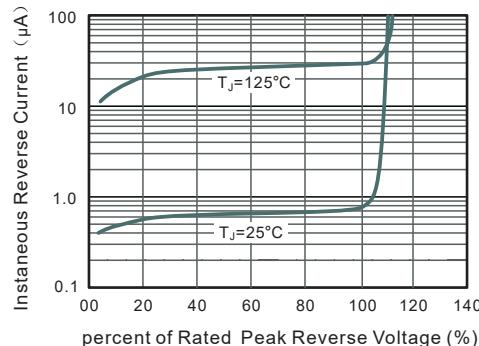


Fig.3 Typical Instantaneous Forward Characteristics

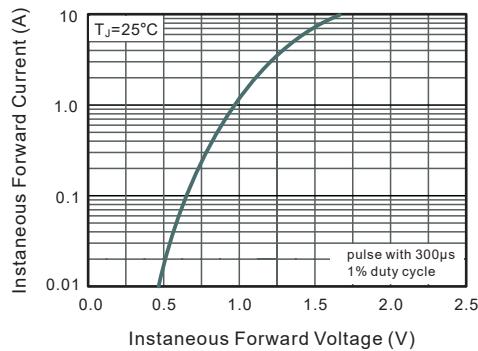


Fig.4 Typical Junction Capacitance


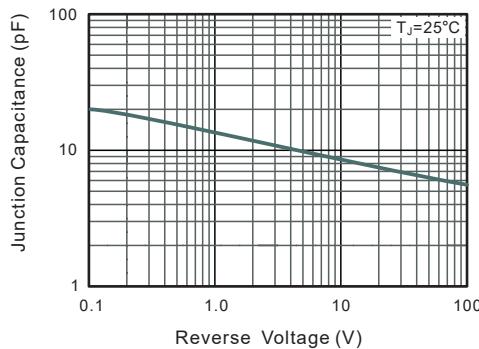


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current



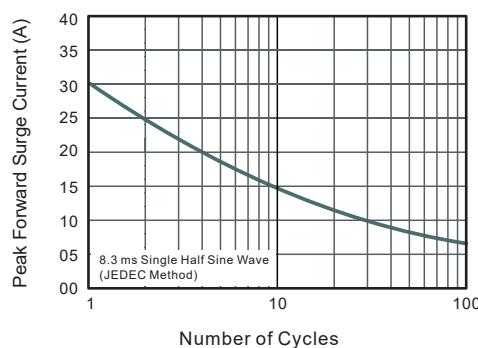


S1ABF-PJ thru S1MBF-PJ

GENERAL PURPOSE SILICON RECTIFIERS

PACKAGE OUTLINE

SMBF

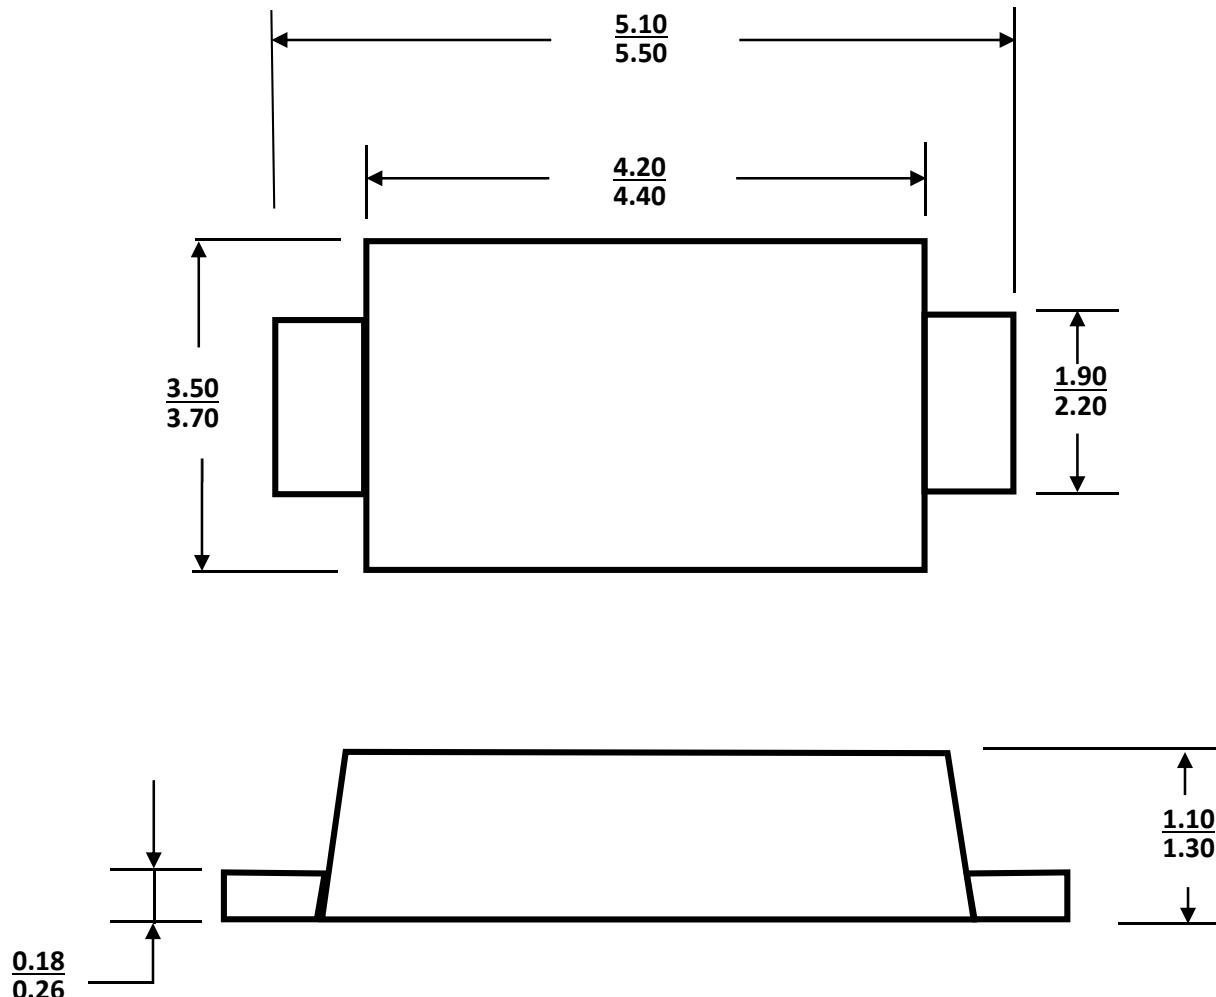

Dimensions in millimeters

Marking

Type number	Marking code
S1ABF-PJ	S1AB
S1BBF-PJ	S1BB
S1DBF-PJ	S1DB
S1GBF-PJ	S1GB
S1JBF-PJ	S1JB
S1KBF-PJ	S1KB
S1MBF-PJ	S1MB

ORDERING INFORMATION

Device	Package	Shipping
S1ABF-PJ thru S1MBF-PJ	SMBF	5,000/Tape & Reel (13 inches)