

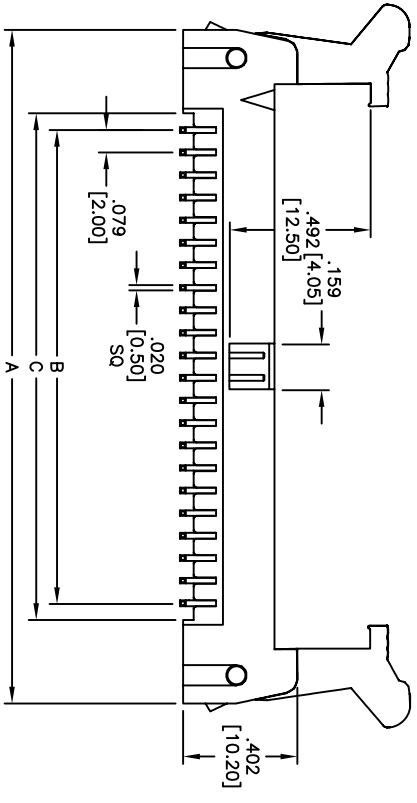
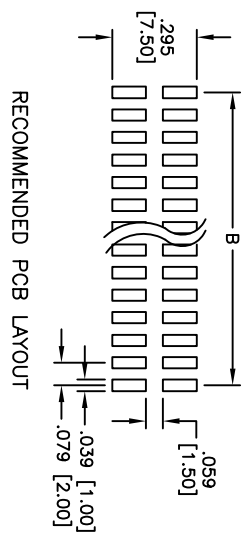


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/1/13	

APPROVED: _____
 DATE: _____ TITLE: _____

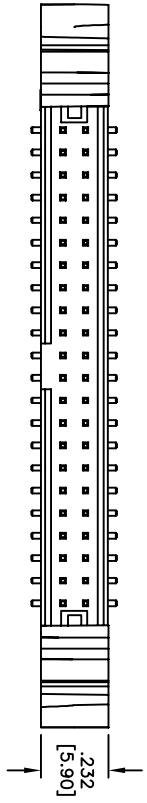

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant

Positions: 10, 12, 14, 16, 20, 22, 24, 26, 30, 32, 34, 40, 44, 50, 60
 A = .079 [2.00] x No. of Spaces + .705 [17.90]
 B = .079 [2.00] x No. of Spaces
 C = .079 [2.00] x No. of Spaces + .079 [2.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

2MM LATCHING BOX HEADER, VERTICAL, LONG LATCH, SMT, GOLD PLATED

A
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
APPROVALS	DATE
DRAWN AY	3/1/13
CHECKED AH	3/1/13
APPROVED	

SIZE	PART NO.	REV.
X	2MHR-XX-VUAL-SMT	-

REF: S0004TT SCALE: NTS SHEET 1 OF 1