

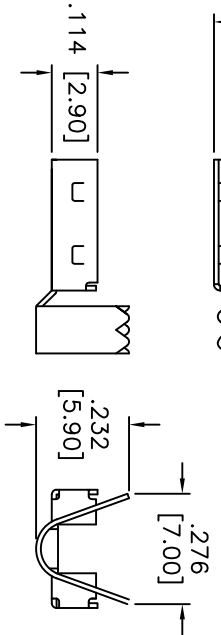
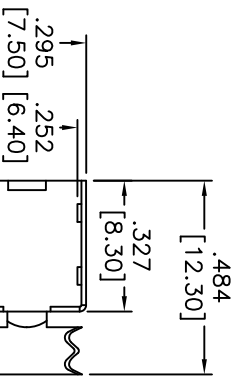


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/10	


APPROVED: _____
 DATE: _____ TITLE: _____

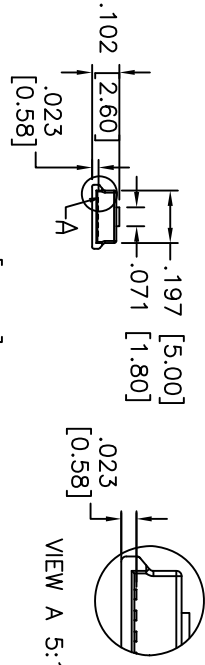

FRONT SHELL

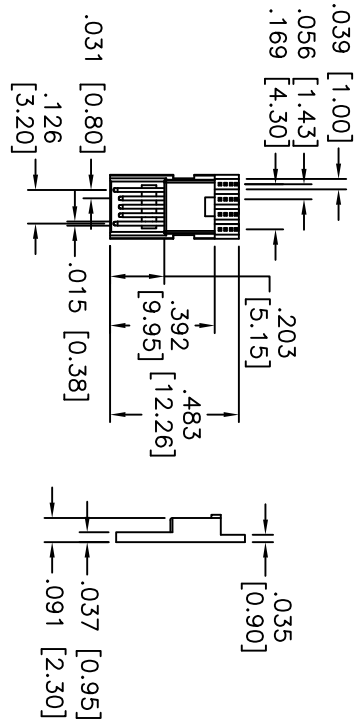

VIEW A 5:1

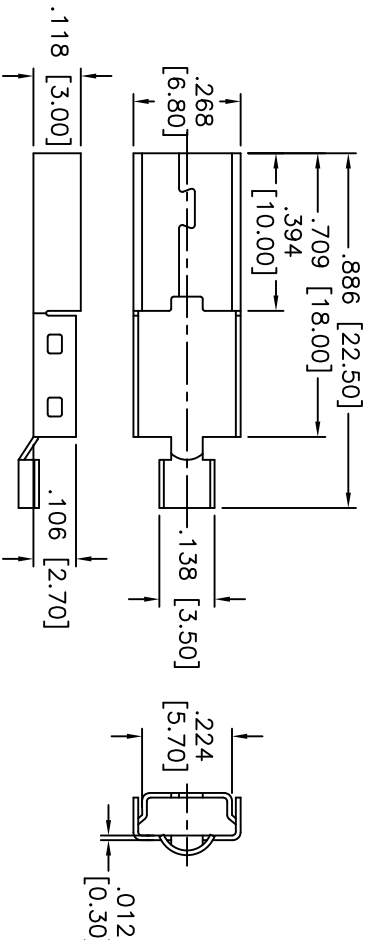

BACK SHELL

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Cold rolled steel, Nickel plated.

Plating:

Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails

Electrical:

Current rating: 1 Amps max

Contact resistance: 30 Mohms max

Insulation resistance: 1000 Mohms min @ DC500V

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE	DATE

DRAWN: DY 7/26/10
 CHECKED: _____
 APPROVED: _____

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINI USB, 5PIN, MALE SOLDER

SIZE	PART NO.	REV.
X	MUSB-B5-P3-S4	

REF: S00728T SCALE: NTS SHEET 1 OF 1