
TERMINAL BLOCKS

5.08mm PITCH VERTICAL MOUNT


- 5.08mm pitch
- Professional rising clamp
- 1.5mm² wire acceptance
- Rating 17.5/50V
- Colour green
- UL/CE approved
- Interlocking

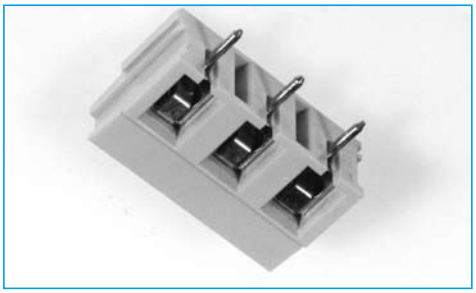

SPECIFICATION

Rating:	17.5A/250 Volts
Dielectric Strength:	>2KV
Insulation Resistance:	>5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant nylon 66 (Green)
Pin/terminal:	5 micron tinned nickel plated brass
Rising clamp:	Nickel plated brass
Screw/torque:	M3 Zinc Steel/0.5Nm, colour passivated and tropicalised
Recommended PCB hole size:	ø1.3mm²

OUTLINE DRAWING

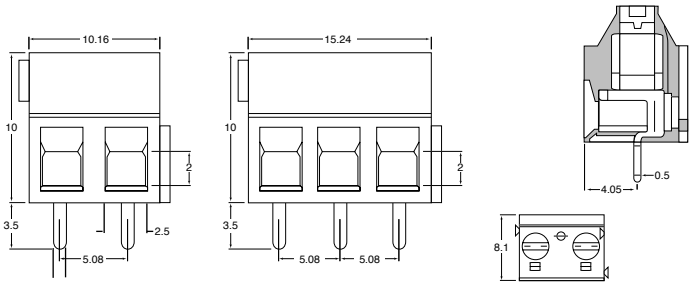

ORDERING INFORMATION


DBC	TB	13	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details

TERMINAL BLOCKS

5.08mm 45° PITCH RISING CLAMP

- 5.08mm Pitch
- Rising Clamp Terminal
- 2 - 12 pole interlocking
- 2.5mm2 wire acceptance
- UL/CE/VDE approved

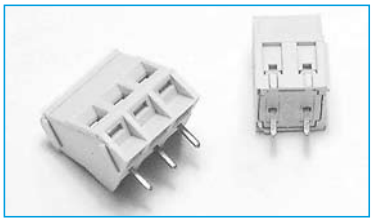


SPECIFICATION

Electrical Characteristics

Rating Current:	17.5/250V
Contact Resistance:	>125kV
Insulation Resistance:	≥5mΩ
Operating Temperature:	-20°C to +125°C

OUTLINE DRAWING

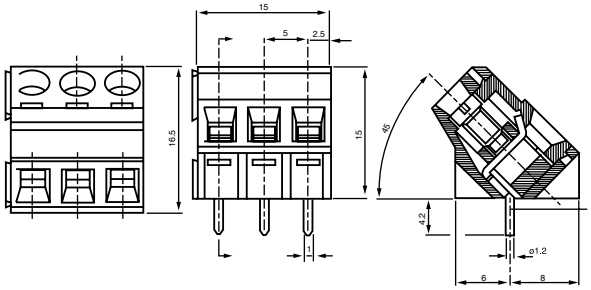

ORDERING INFORMATION

DBC	TB	46	/2
Dubilier Connectors	Series Terminals Blocks	Style 46 = Style 46	No of Ways 2 = 2ways 3 = 3ways

* other number of ways are available, Please consult the office for further details

SECTION 18