

## CMOS Quad Bilateral Switch

### FEATURES


- Wide Operating Voltage Range of 3.0V to 18.0V
- Maximum Input Current of 1 $\mu$ A at 18V over Full Package-Temperature range, 100nA at 18V and 25°C
- Standardized Symmetrical Output Characteristics
- Noise Margin
  - 1.0V min @ 5.0V supply
  - 2.0V min @ 10.0V supply
  - 2.5V min @ 15.0V supply

### DESCRIPTION

The CD4066B device is a quad bilateral switch intended for the transmission or multiplexing of analog or digital signals. In addition, the on-state resistance is relatively constant over the full signal input range.

The CD4066B device consists of four bilateral switches, each with independent controls. Both the p and the n devices in a given switch are biased on or off switch is tied to either the input (when the switch is on) or to  $V_{SS}$  (when the switch is off). This configuration eliminates the variation of the switch-transistor threshold voltage with input signal and, thus, keeps the on-state resistance low over the full operating-signal range.


The advantages over single-channel switches include peak input-signal voltage swings equal to the full supply voltage and more constant on-state impedance over the input-signal range.

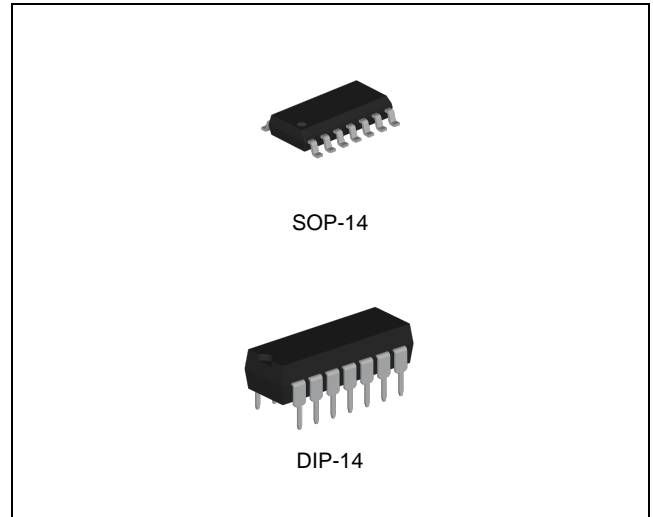

### ORDERING INFORMATION

DEVICE	Package Type	MARKING	Packing	Packing Qty
CD4066BE	DIP14	CD4066B	TUBE	1000/box
CD4066BM/TR	SOP14	CD4066B	REEL	2500/reel

**BLOCK DIAGRAM**

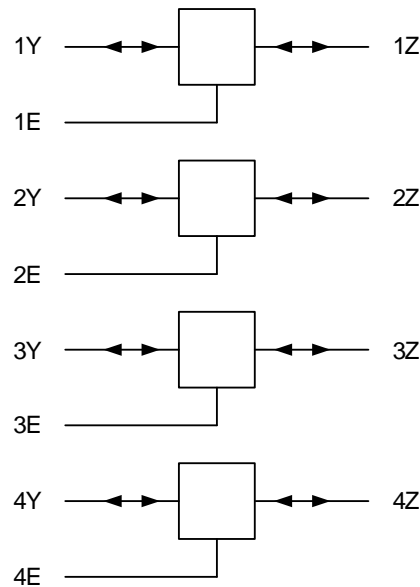

**ABSOLUTE MAXIMUM RATINGS** (Note 1)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
DC Supply Voltage (Referenced to $V_{SS}$ )	$V_{DD}$	-0.5	20	V
Digital Input Voltage (Referenced to $V_{SS}$ )	$V_{IN}$	-0.5	$V_{DD} + 0.5$	V
Analog Input Voltage (Referenced to $V_{SS}$ )	$V_{IS}$	-0.5	$V_{DD} + 0.5$	V
Analog Output Voltage (Referenced to $V_{SS}$ )	$V_{OS}$	-0.5	$V_{DD} + 0.5$	V
DC Input Current	$I_{IN}$	-	$\pm 10$	mA
Storage Temperature	$T_{STG}$	-65	150	$^{\circ}C$


Note1. Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

**RECOMMENDED OPERATING CONDITIONS** (Note 2)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage (Referenced to $V_{SS}$ )	$V_{DD}$	3	18	V
Digital Input Voltage (Referenced to $V_{SS}$ )	$V_{IN}$	0	$V_{DD}$	V
Analog Input Voltage (Referenced to $V_{SS}$ )	$V_{IS}$	0	$V_{DD}$	V
Operating Free-Air Temperature Range	$T_A$	-40	85	$^{\circ}C$

Note 2. The device is not guaranteed to function outside its operating ratings.

## PIN CONFIGURATION

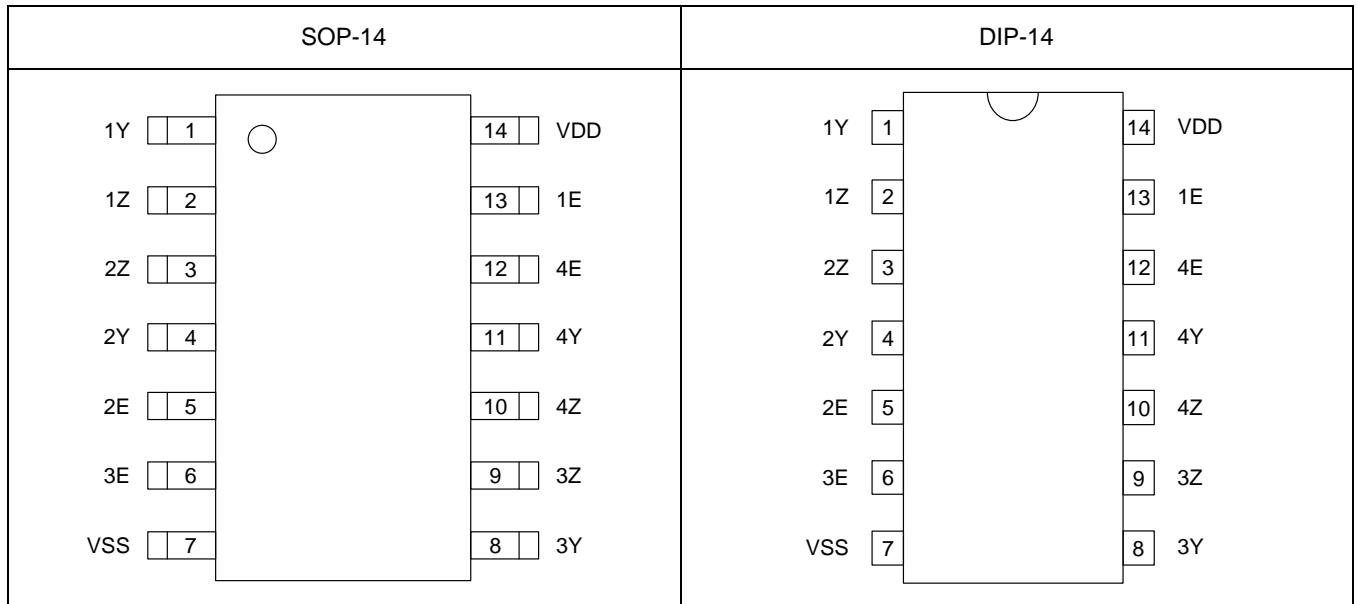

## PIN DESCRIPTION

Pin No.		Pin Name	Pin Function
SOP-14	DIP-14		
1	1	1Y	Analog Input/Output for Switch 1
2	2	1Z	Analog Output/Input for Switch 1
3	3	2Z	Analog Output/Input for Switch 2
4	4	2Y	Analog Input/Output for Switch 2
5	5	2E	ON/OFF (Enable) Control for Switch 2
6	6	3E	ON/OFF (Enable) Control for Switch 3
7	7	VSS	Low Power Supply
8	8	3Y	Analog Input/Output for Switch 3
9	9	3Z	Analog Output/Input for Switch 3
10	10	4Z	Analog Output/Input for Switch 4
11	11	4Y	Analog Input/Output for Switch 4
12	12	4E	ON/OFF (Enable) Control for Switch 4
13	13	1E	ON/OFF (Enable) Control for Switch 1
14	14	VDD	Power Supply

**DC ELECTRICAL CHARACTERISTICS**

 Voltages referenced to  $V_{SS}$ .

SYMBOL	PARAMETER	TEST CONDITION	$V_{DD}$	Limit			UNIT	
				-40°C	25°C	85°C		
$V_{IH}$	Minimum High-Level Input Voltage, ON/OFF Control Inputs	$R_{ON} = \text{Per Spec}$	5 V	3.5	3.5	3.5	V	
			10 V	7	7	7		
			15 V	11	11	11		
$V_{IL}$	Maximum Low-Level Input Voltage, ON/OFF Control Inputs	$R_{ON} = \text{Per Spec}$	5 V	1	1	1	V	
			10 V	2	2	2		
			15 V	2	2	2		
$I_{IN}$	Maximum Input Leakage Current, On/Off Control Inputs	$V_{IN} = V_{DD} \text{ or } V_{SS}$	18 V	$\pm 0.1$	$\pm 0.1$	$\pm 1.0$	$\mu\text{A}$	
$I_{DD}$	Maximum Quiescent Supply Current (Per Package)	$V_{IN} = V_{DD} \text{ or } V_{SS}$	5 V	0.25	0.25	7.5	$\mu\text{A}$	
			10 V	0.5	0.5	15		
			15 V	1.0	1.0	30		
			20 V	5.0	5.0	150		
$R_{ON}$	Maximum On-State Resistance	$V_{IN} = V_{DD}$ , $R_L = 10\text{k}\Omega$ returned to $(V_{DD}-V_{SS})/2$ , $V_{IS} = V_{SS}$ to $V_{DD}$	5 V	800	1050	1300	$\Omega$	
			10 V	310	400	550		
			15 V	200	240	320		
$\Delta R_{ON}$	Maximum Difference in On-State Resistance between Any Two Channels	$V_{IN} = V_{DD}$ , $R_L = 10\text{k}\Omega$	5 V	-	15	-	$\Omega$	
			10 V	-	10	-		
			15 V	-	5	-		
$I_{OFF}$	Maximum Off-Channel Leakage Current	$V_{IN} = V_{SS}$ , $ V_{IS} - V_{OS}  = V_{DD} - V_{SS}$	18 V	$\pm 0.1$	$\pm 0.1$	$\pm 1.0$	$\mu\text{A}$	
$I_{ON}$	Maximum On-Channel Leakage Current	$V_{IN} = V_{DD}$ , $V_{IS} = V_{DD} \text{ or } V_{SS}$	18 V	$\pm 0.1$	$\pm 0.1$	$\pm 1.0$	$\mu\text{A}$	
$V_{OS}$	Switch Output Voltage	$V_{IS} = V_{SS}$	5 V	-	-	0.4	V	
			10 V	-	-	0.5		
			15 V	-	-	1.5		
			$V_{IS} = V_{DD}$	5 V	4.6	-	-	V
				10 V	9.5	-	-	
				15 V	13.5	-	-	
$I_{IS}$	Switch Input Current	$V_{IS} = V_{SS}$	5 V	0.64	0.51	0.36	mA	
			10 V	1.6	1.3	0.9		
			15 V	4.2	3.4	2.4		
			$V_{IS} = V_{DD}$	5 V	-0.64	-0.51	-0.36	mA
				10 V	-1.6	-1.3	-0.9	
				15 V	-4.2	-3.4	-2.4	

**AC ELECTRICAL CHARACTERISTICS**

 Voltages referenced to  $V_{SS}$ ,  $C_L = 50 \text{ pF}$ ,  $R_L = 200\text{k}\Omega$ , Input  $t_r = t_f = 20 \text{ ns}$ 

SYMBOL	PARAMETER	$V_{DD}$	Limit			UNIT
			-40°C	25°C	85°C	
$t_{PLH}$ , $t_{PHL}$	Maximum Propagation Delay, Analog Input to Analog Output (Figure 1)	5 V	40	40	80	ns
		10 V	20	20	40	
		15 V	15	15	30	
$t_{PLZ}$ , $t_{PHZ}$ , $t_{PZL}$ , $t_{PZH}$	Maximum Propagation Delay, ON/OFF Control to Analog Output (Figure 2)	5 V	70	70	140	ns
		10 V	40	40	80	
		15 V	30	30	60	
$C_{IO}$	Capacitance	ON/OFF Control Input	-	-	15	pF
		Analog I/O (Control Input = $V_{SS}$ )	-	-	7.5	
		Feedthrough (Control Input = $V_{SS}$ )	-	-	0.6	

**ADDITIONAL DYNAMIC CHARACTERISTICS**

 Voltages referenced to GND and  $T_A = 25^\circ\text{C}$  unless otherwise noted. Guaranteed by design.

SYMBOL	PARAMETER	TEST CONDITION	$V_{DD}$	TYP	UNIT
THD	Total Harmonic Distortion	$V_{IN} = V_{DD}$ , $V_{SS} = -5\text{V}$ , $R_L = 10\text{k}\Omega$ , $f_{IS} = 1\text{kHz}$ sine wave	5 V	0.4	%
-	-3dB Cutoff Frequency (Switch On)	$V_{IN} = V_{DD}$ , $V_{SS} = -5\text{V}$ , $R_L = 1\text{k}\Omega$	5 V	40	MHz
-	-50dB Feedthrough Frequency (Switch Off)	$V_{IN} = \text{GND}$ , $V_{IS} = 5\text{V}$ , $R_L = 1\text{k}\Omega$	10 V	1	MHz
-	-50dB Crosstalk Frequency	$V_{IN(A)} = V_{DD} = 5\text{V}$ , $V_{IN(B)} = V_{SS} = -5\text{V}$ , $V_{IS(A)} = 5\text{V}_{p-p}$ , $50\Omega$ source, $R_L = 1\text{k}\Omega$	5 V	8	MHz
-	Crosstalk (Control Input to Signal Output)	$V_{IN} = 10\text{V}$ (square wave), $R_L = 10\text{k}\Omega$ , $t_r, t_f = 20\text{ns}$	10 V	50	mV
-	Maximum Control Input Repetition Rate	$V_{IS} = V_{DD}$ , $V_{SS} = \text{GND}$ , $R_L = 1\text{k}\Omega$ , $C_L = 50\text{pF}$ , $V_{IN} = 10\text{V}$ (square wave centered on 5V), $t_r, t_f = 20\text{ns}$ , $V_{OS} = 1/2 V_{OS}$ at 1kHz	5 V	6	MHz
			10 V	9	
			15 V	9.5	

**FUNCTION TABLE**

ON/OFF Control	Switch
L	OFF (Hi-Z)
H	ON

**SWITCHING CHARACTERISTICS**

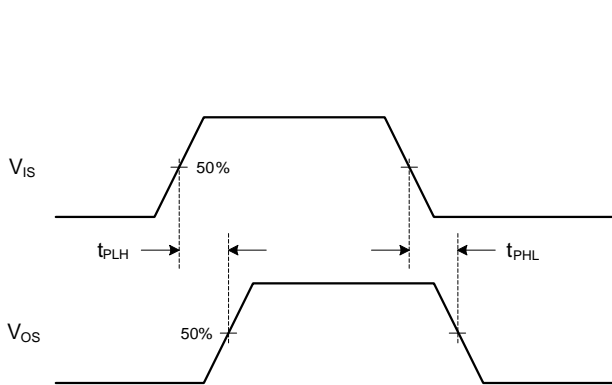


Fig. 1. Analog In to Analog Out

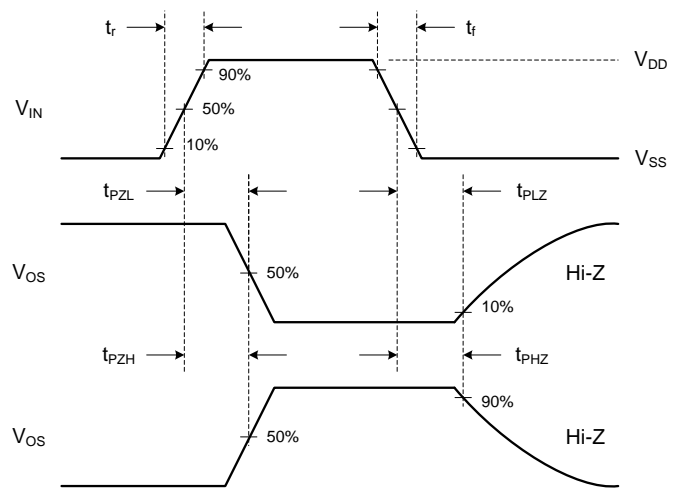


Fig. 2. ON/OFF Control to Analog Out

### Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.