
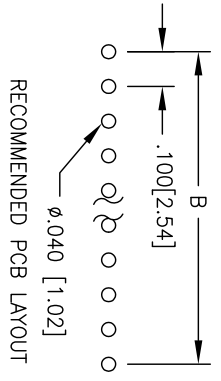

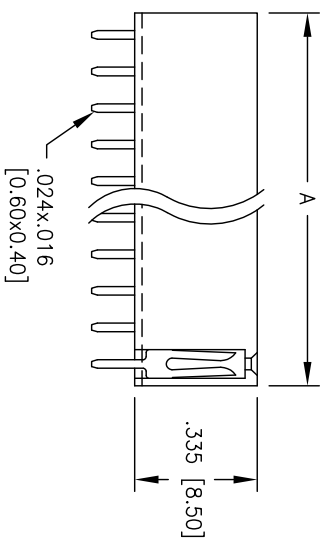


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	

APPROVED: _____

DATE: _____ TITLE: _____

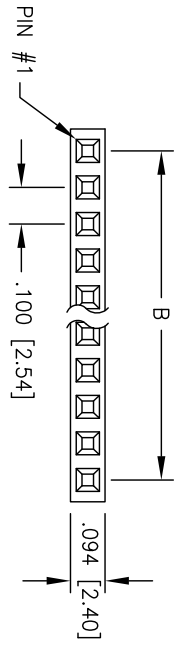

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
Plating:
 15u" Gold over Nickel underplate on mating area,
 Tin over Copper underplate on PCB tails

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40C to +105C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
X .10 ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	
DRAWN AY	DATE 2/22/11
CHECKED WW	DATE 2/22/11
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 RECEPTACLE STRIP, SINGLE ROW STRAIGHT, PCB TAILS, 15u" SEL GOLD PLATED

SIZE X	PART NO. RS1-XX-SG-15	REV. -
REF: S00059T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1