
used for: D-SUB COMBINATION

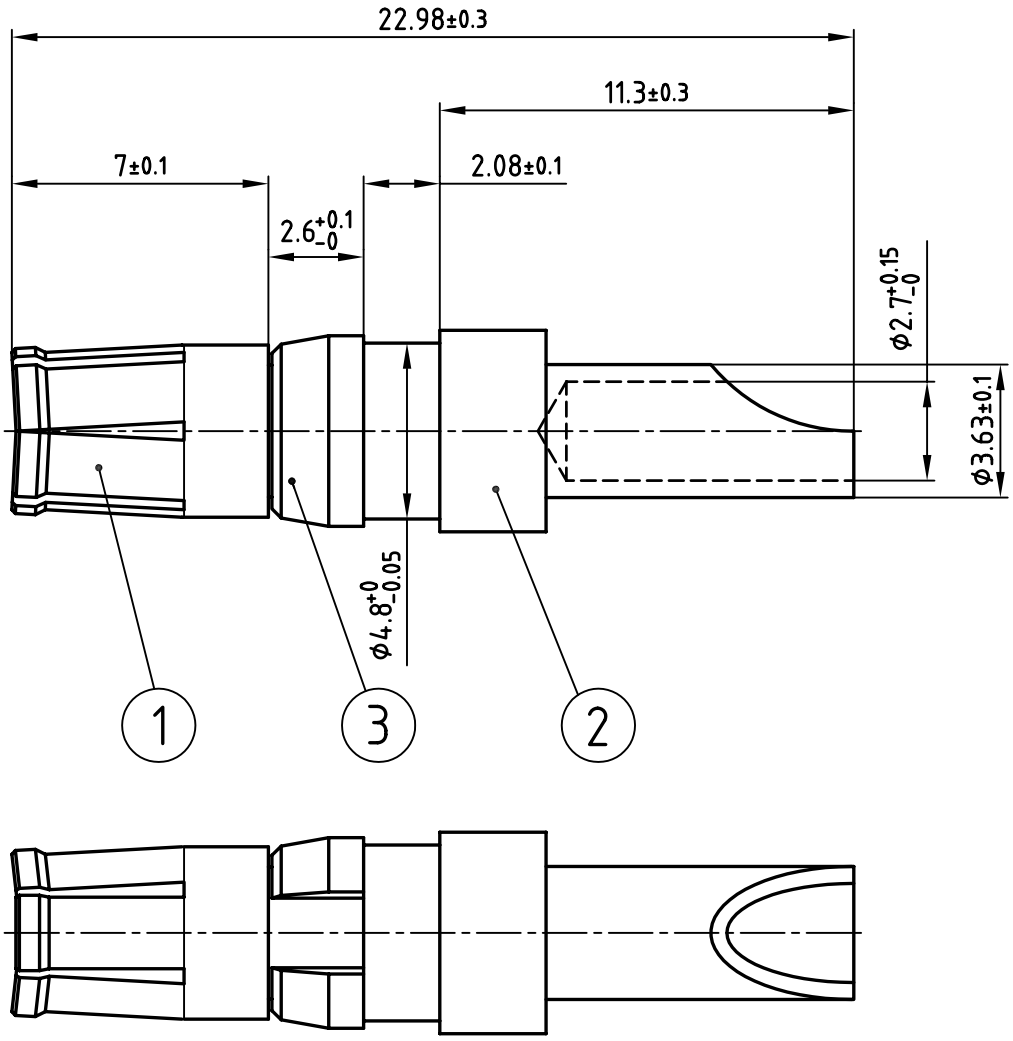

Plating item 1	Part-NO.
min. 30µ" HARD GOLD OVER min. 50µ" NICKEL	132C10029X
min. 50µ" HARD GOLD OVER min. 50µ" NICKEL	132J10029X

Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING:
   ITEM 1: SEE TABLE
   ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
   ITEM 3: NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance ISO 2768-m

	date	name
1998		
drawn	23.03.	Barcinski
appd.	23.03.	Mickenbecker
norm		
d-old		

scale: 5:1

material: SEE NOTES

title:

HIGH POWER CONTACT FEMALE

SOLDER CUP 20A

D-SUB COMBINATION

dwg no: 13K1IE4A

CAD/ REL.13

DIN-A 4

sh: 1/1

product no: SEE TABLE