


# SBC

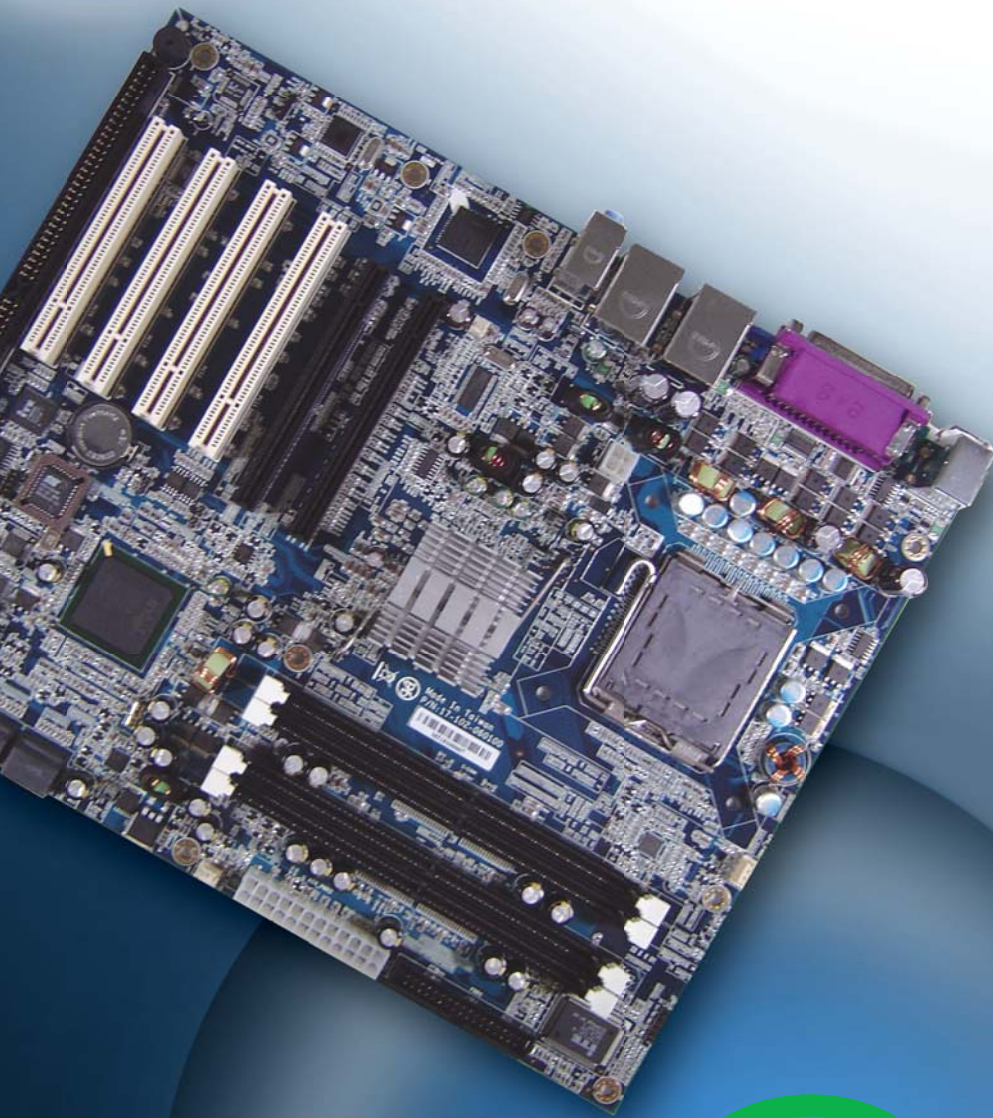

## **PMB-601LF**

**New Intel® Q965 ATX  
Motherboard Supports  
Intel® Core 2 Duo  
Processors for Best in  
Class Performance**

### **Features :**

- Support Intel® Core 2 Duo, Intel Celeron® D, Intel® Pentium® D and Intel® Pentium® 4 processors
- Equipped with Intel Q965 Chipset with FSB 1066MHz
- Memory Supports DDR 800 SDRAM up to 8GB
- Expansion Slots for PCI-E x16, PCI & ISA
- Applications such as gaming, medical, multimedia systems, digital image storage servers and more



**PROTECH SYSTEMS**

*It's the right choice*

No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: [sales@protech.com.tw](mailto:sales@protech.com.tw)

<http://www.protech.com.tw>




**ISO CERTIFIED**

**9001 14001**

# PMB-601LF

New Intel® Q965 ATX Motherboard Supports Intel® Core 2 Duo Processors for Best in Class Performance

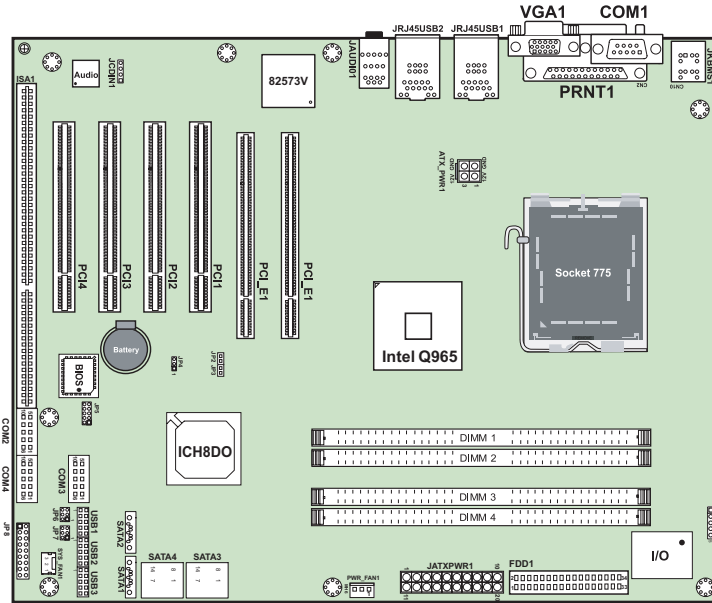

Specifications	
<b>System</b>	
<b>CPU Type</b>	Intel® Celeron® D, Pentium® 4, Pentium® D, Core 2 Duo processor
<b>Chipset</b>	Intel® Q965 + ICH8DO + FWB (FSB : 533/667/800/1066MHz)
<b>DRAM</b>	4 x 240-pin DDR2 DIMM, support DDR2 800 SDRAM up to 8GB
<b>BIOS</b>	PhoenixAward PnP BIOS, with VGA BIOS
<b>Watchdog</b>	1~255 secs Watchdog timer selectable w / Reset
<b>Power Supply</b>	Support ATX Power
<b>Power Requirement</b>	+5V, +12V, +3.3V, -12V, +5VSB
<b>Power Consumption</b>	+5V : 3.2A / +12V : 10.45A / +3.3V : 5.32A / -12V : 0.06A / +5VSB : 0.52A (Pentium® 4 3.4GHz)
<b>Dimension</b>	305mm x 244mm (12" x 9.61")
<b>I/O Ports</b>	
<b>SATA Port</b>	Six ports S-ATA connector
<b>FDD Interface</b>	One FDD connector with 34-pin Boxheader on board
<b>Function BUS</b>	1 x PCI-E 16X ; 1 x PCI-E 4X ; 4 x PCI ; 1 x ISA
<b>Serial Port</b>	COM1/3/4 for RS-232, COM2 for R232/422/485 (COM 3/4 can output +5V or +12V, and use Jumper settings)
<b>Parallel Port</b>	1 x parallel (SPP / EPPP / ECP)
<b>IrDA</b>	1 (SIR)
<b>Keyboard</b>	Mini DIN connector
<b>Mouse</b>	Mini DIN connector

<b>LAN</b>	Lan 1 : Intel® 82573V (10/100/1000Mbps) Lan 2 : Intel® 82573V (10/100/1000Mbps) Supports Wake-on-LAN
<b>Audio</b>	HD Codec, Realtek ALC262, with Mic / Line-out / Line-in
<b>USB</b>	10 ports, support USB 2.0
<b>Display</b>	
<b>Graphic</b>	Built-in Intel® Q965, share system memory, Support CRT, PCI-E 16X (SDVO)
<b>Environment</b>	
<b>Operation Temp.</b>	0°~60°C (32°~140°F)
<b>Storage Temp.</b>	-40°~85°C (-40°~185°F)
<b>Humidity</b>	Operation humidity 20~90%, Storage humidity 20~95%

Ordering Information	
<b>PMB-601LF</b>	ATX S775 Core 2 Duo w VGA / Audio / 2LAN / 4COM / ISA (10/100/1000Mbps)
<b>Certificate: CE, FCC CLASS A</b>	

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in JAN. 2007.