


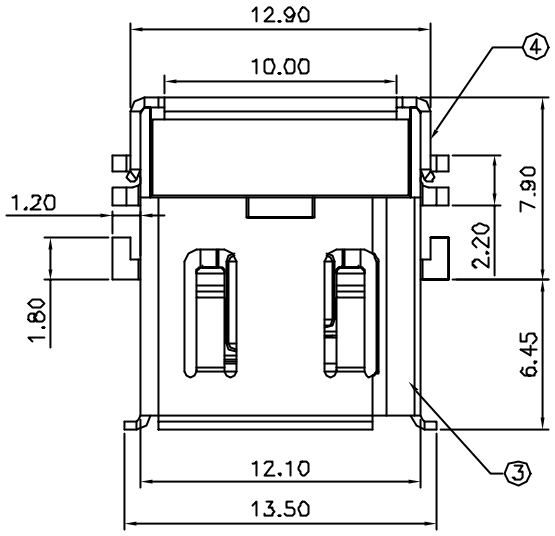


Recommended P.C.B Layout (Component Side)

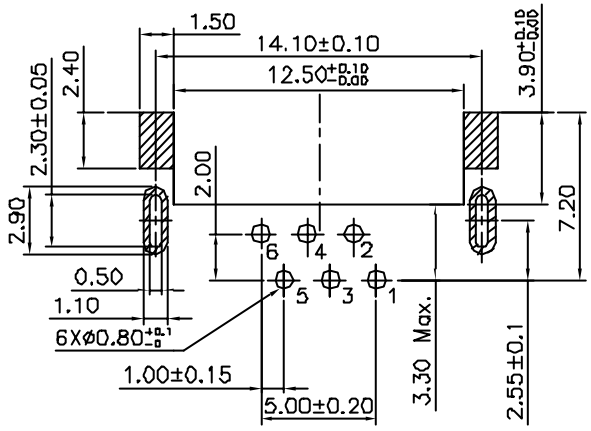

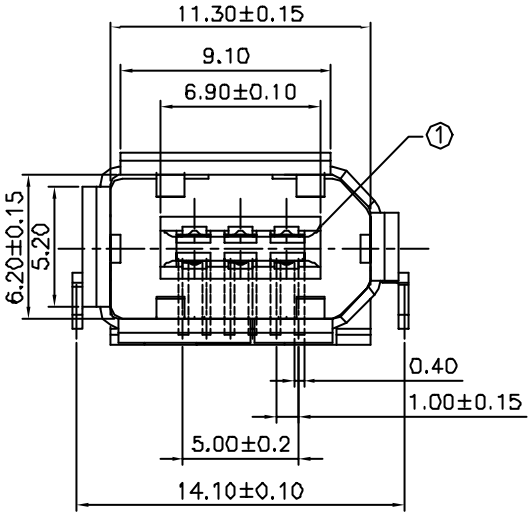

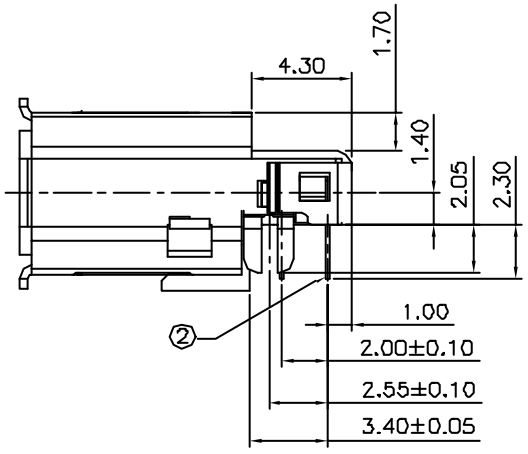

NOTE(I):

020179MRD06□□01ZL

1. Selective plating
   - 'S1,-05u" Min. gold in contact area/ 100u" Min. Tin in solder area.
   - 'S2,-Gold flash in contact area/ 100u" Min. Tin in solder area.
   - 'S3,-10u" Min. gold in contact area/ 100u" Min. Tin in solder area.
   - 'S4,-15u" Min. gold in contact area/ 100u" Min. Tin in solder area.
   - 'S5,-30u" Min. gold in contact area/ 100u" Min. Tin in solder area.
   - 'S6,-50u" Min. gold in contact area/ 100u" Min. Tin in solder area.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
4	SHELL	Brass	——	plated Nickel
3	SHELL	Brass	——	plated Nickel
2	TERMINAL	Brass	——	plated Gold/Tin
1	PLASTIC	High Temp	BLACK	UL94V-0

SUYIN CONNECTOR

CUSTOMER COPY

TITLE: IEEE-1394 Connector,Level,DIP Type,Center hight 1.35mm

ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	0		NEW	——	

Angle	±2°
30 ~	±0.50
10 ~ 30	±0.30
~ 10	±0.15

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

DRAW		
DESIGN		
CHECK		
APPRO.		

PART NO.	020179MR006SX01ZL			
PART NO. (OLD)	——			
DRAWING NO. D ING	020179MR006SX01ZL			
SCALE 4:1	UNIT	mm	A4	

CH040423-66