4850, 3-pole, Socket, PCB terminals, DIN Plug/Socket

3-pole

Description

- PCB Mounting
- DIN Plug: 3-pole , straight

Technical Data

Diameter	9.0 mm
Number of Poles	3-pole
Ratings DC	2 A / 12 VDC
Ratings AC	1 A / 100 VAC
Dielectric Strength	250 VAC
Insulation Resistance	> 50 MΩ @ 250 VDC
Material: Housing	Thermoplastic, black, UL 94V-0

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	PCB terminals silver plated
Lifetime	5000 Insertions

Dimensions

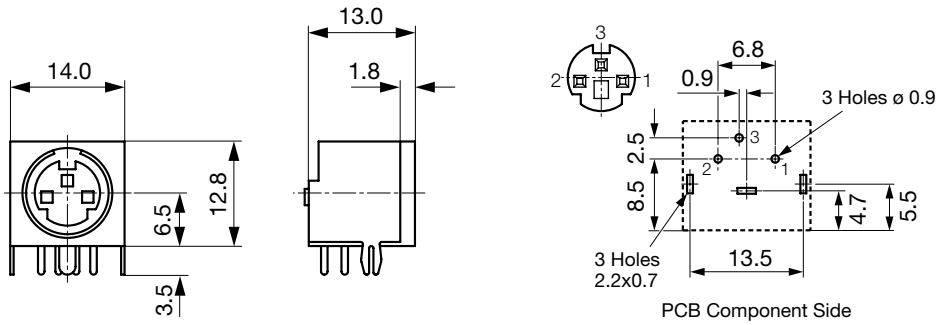

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DIN Plug/Socket	9.0	3-pole	PCB terminals	4850.2310

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit 125 Pcs

Mating Inlets/Plugs

Category / Description

DIN Plug/Socket Overview complete

4850, 3-pole, Plug, solder terminal, DIN Plug/Socket	4850.1310

DIN Plug/Socket further types to 4850.2310

21.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.