


NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.4mm;  
Insulator--NYLON PA66 94V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For MINI / 297 autofuse / ATM series or equivalent.
5. Temperature rating: -50°C to +145°C.
6. Suitable rated current: 20A@500VAC.
7. Fully insulated clips to protect fuses against shorting.
8. Withstands shock and vibration.
9. Packing: 1000PCS/bag.

### MOUNTING DETAIL

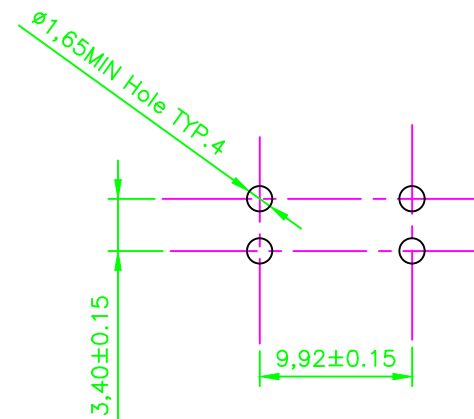

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	<b>XFCN</b> 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1	
				X.	±0.30	X°	±5°		CHKD	DATE	2020. 04. 12
				.X	±0.20	.X°	±2°		APPD	UNITS	mm
				.XX	±0.08	.XX°	±1°		VIEW	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°		PRODUCT NAME	Fuse Clip for PCB Mounted	
AO	MODIFICATION	DRAW	DATE					PART. NO.	XF-508P-B		
VER									DWG. NO.	009	