RL1N1X00F SERIES

PHOTOFLASH FAST RECOVERY RECTIFIER

产品规格确认书

Download from alldatasheet.com

RL1N1000F THRU RL1N1800F

PHOTOFLASH FAST RECOVERY RECTIFIER

康 比 電 子
HORNBY ELECTRONIC


REVERSE VOLTAGE: **1000 to 1800 VOLTS**

FORWARD CURRENT: **0.5 AMPERE**

FEATURES

· Low leakage
· Low forward voltage drop
· High current capability
· High reliability

A-405

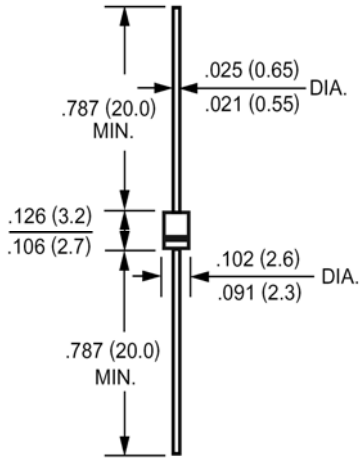

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: Molded plastic, A-405
Epoxy: UL 94V-O rate flame retardant
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
Polarity: Color band denotes cathode end
Mounting position: Any
Weight: 0.008ounce, 0.22gram

Maximum Ratings and Electrical Characteristics

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase, half wave, 60H_Z, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	*RL1N1000F*	*RL1N1200F*	*RL1N1400F*	*RL1N1600F*	*RL1N1800F*	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1000	1200	1400	1600	1800	**Volts**
Maximum RMS Voltage	V_{RMS}	700	840	980	1120	1260	**Volts**
Maximum DC Blocking Voltage	V_{DC}	1000	1200	1400	1600	1800	**Volts**
Maximum Average Forward Rectified Current at T_A=55℃	$I_{(AV)}$	0.5					**Amp**
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30					**Amp**
Maximum Forward Voltage at 0.5A DC and 25℃	V_F	1.8					**Volts**
Maximum Reverse Current at Rated DC Blocking Voltage T_A=25℃	I_R	5.0					**uAmp**
Maximum Full Load Reverse Current Average, Full Cycle .375", (9.5mm) lead length at T_L = 55℃		100					**uAmp**
Typical Junction Capacitance (Note 1)	C_J	10					**pF**
Maximum Reverse Recovery Time (Note 2)	T_{RR}	300					**nS**
Operating and Storage Temperature Range	T_J, Tstg	-55 to +150					℃

NOTES:

1- Measured at 1 MH_Z and applied reverse voltage of 4.0 VDC.

2- Reverse Recovery Test Conditions：I_F=.5A，I_R=1A，I_{RR}=.25A.

Download from alldatasheet.com

RL1N1000F THRU RL1N1800F

PHOTOFLASH FAST RECOVERY RECTIFIER

康 比 電 子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

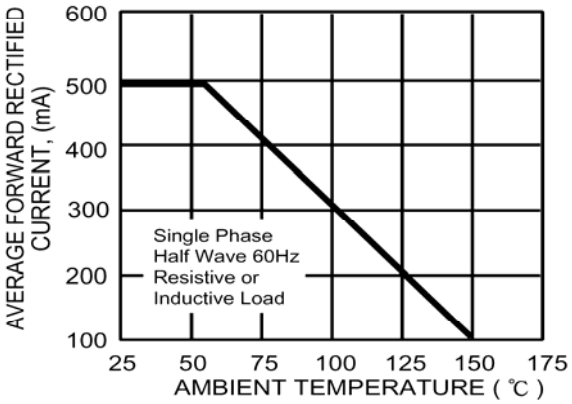


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

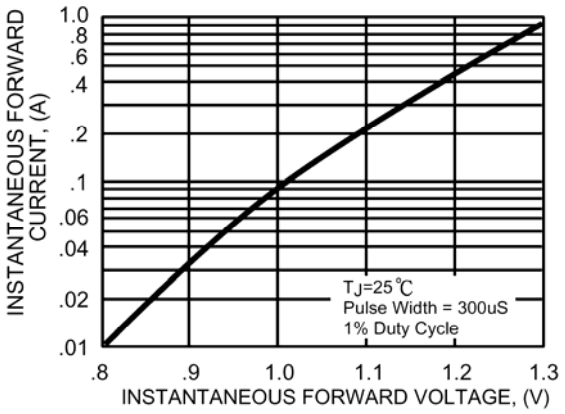


FIG. 3 - MAXIMUM NON-REPETITIVE SURGE CURRENT

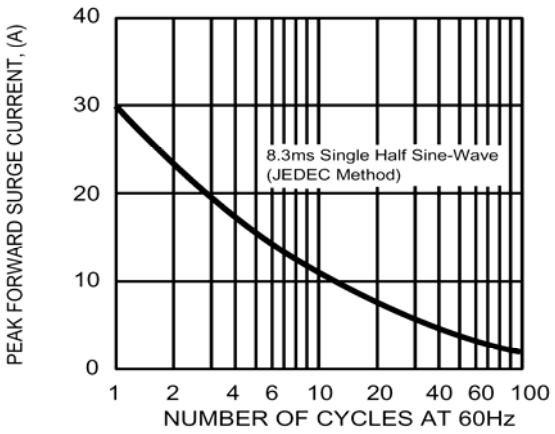


FIG. 4 - TYPICAL JUNCTION CAPACITANCE



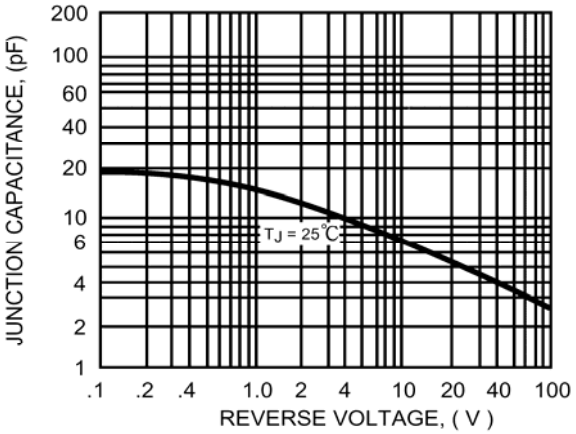


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

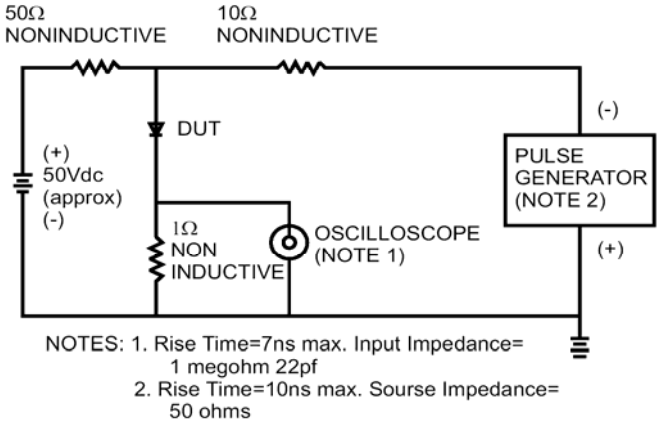

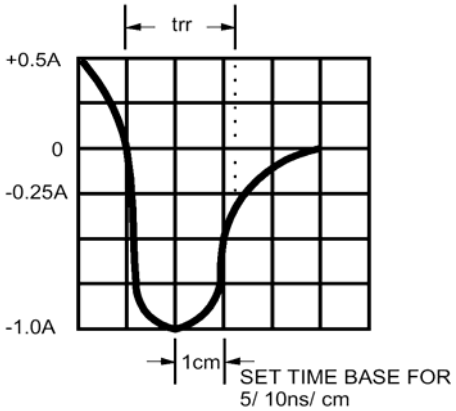

Download from alldatasheet.com