


MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE



SPECIFICATIONS

FREQUENCY RANGE: 1-2 GHz
ISOLATION MINIMUM: 18 dB
VSWR: 1.35 MAXIMUM
INSERTION LOSS: .6 dB MAXIMUM

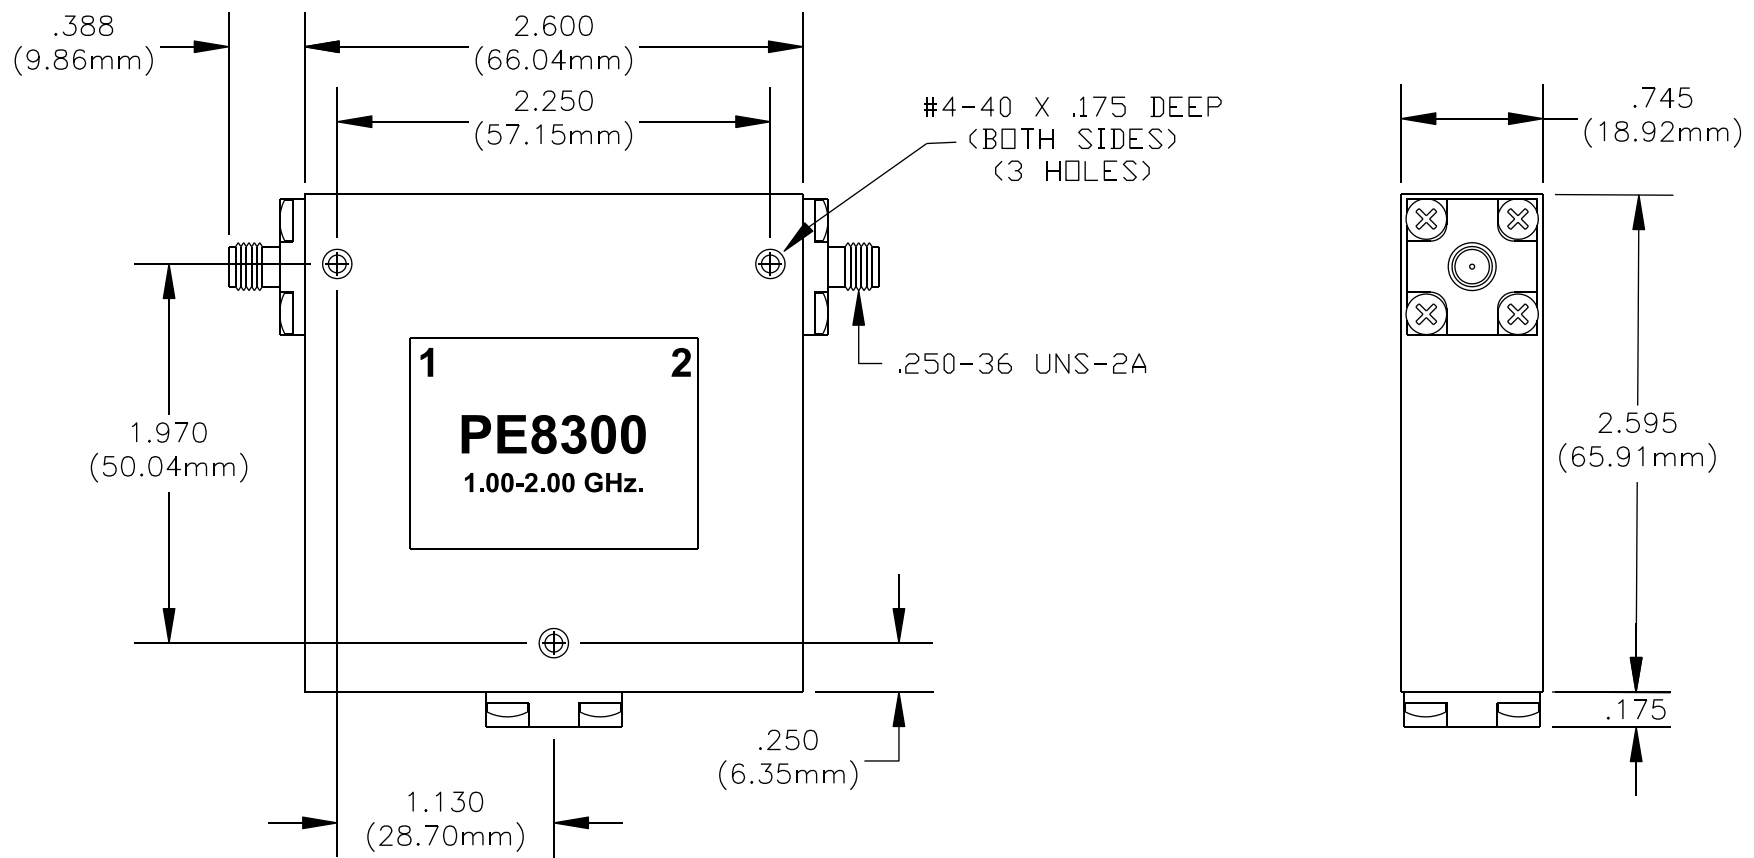

PASTERNAK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE PE8300		DES. FERRITE ISOLATOR, SMA FEMALE FREQUENCY RANGE: 1 TO 2 GHz	
REV. A	FSCM NO. 53919	CAD FILE 082808	SCALE N/A SIZE A 127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.