IXYS

Advance Technical Information


Trench™ HiperFET™ Power MOSFET


MMIX2F94N30T


V_{DSS} = 300V
I_{D25} = 52A
$R_{DS(on)}$ ≤ 40mΩ

(Electrically Isolated Tab)

N-Channel Enhancement Mode
Avalanche Rated
Fast Intrinsic Rectifier



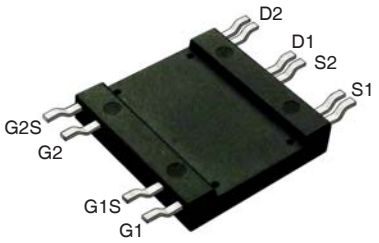

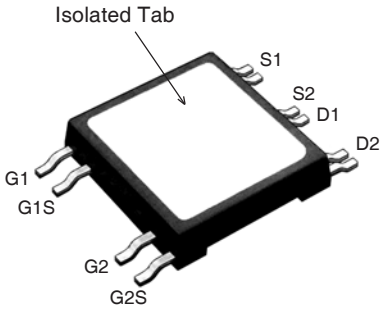

G = Gate D = Drain
S = Source

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	300	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	300	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	52	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	235	A
I_A	T_C = 25°C	47	A
E_{AS}	T_C = 25°C	500	mJ
P_D	T_C = 25°C	305	W
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	20	V/ns
T_J		-55 to +150	°C
T_{JM}		+150	°C
T_{stg}		-55 to +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
V_{ISOL}	50/60 Hz, 1 Minute	2500	V~
F_C	Mounting Force	50..200 / 11..45	N/lb
Weight		8	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	300			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4mA	3.0		5.0	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			50	μA
	Note 2, T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 47A, Note 1			40	mΩ

Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Substrate
  - Excellent Thermal Transfer
  - Increased Temperature and Power Cycling Capability
  - High Isolation Voltage (2500V~)
- Fast Intrinsic Rectifier
- Avalanche Rated
- Very Low $R_{DS(on)}$

Advantages

- Easy to Mount
- Space Savings

Applications

- DC-DC Converters
- Battery Chargers
- Switch-Mode and Resonant-Mode Power Supplies
- DC Choppers
- AC Motor Drives
- Uninterruptible Power Supplies
- High Speed Power Switching Applications

© 2014 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 47A, Note 1	55	95		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		11.4		nF
C_{oss}			917		pF
C_{rss}			116		pF
R_{Gi}	Gate Input Resistance		1.9		Ω
$t_{d(on)}$	**Resistive Switching Times**		40		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 47A		14		ns
$t_{d(off)}$	R_G = 2Ω (External)		45		ns
t_f			12		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 47A		190		nC
Q_{gs}			65		nC
Q_{gd}			53		nC
R_{thJC}				0.41	°C/W
R_{thCS}			0.05		°C/W
R_{thJA}			30		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			94	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			376	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 47A, -di/dt = 100A/μs,		155		ns
I_{RM}	V_R = 100V, V_{GS} = 0V		10.6		A
Q_{RM}			816		nC

Notes:

1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.
2. Part must be heatsunk for high-temp I_{DSS} measurement.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

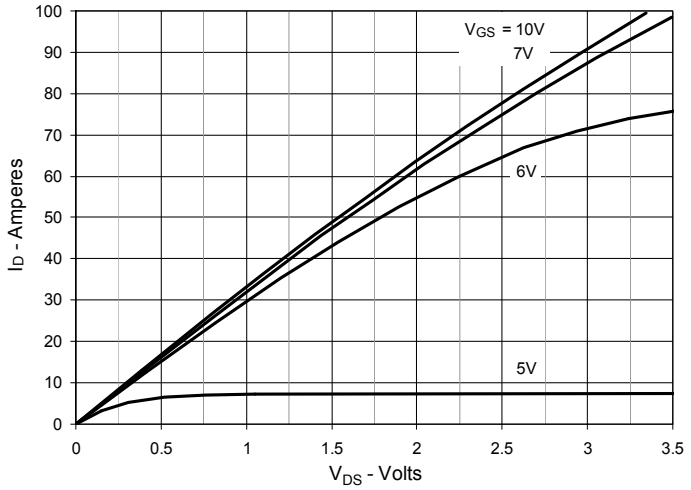


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

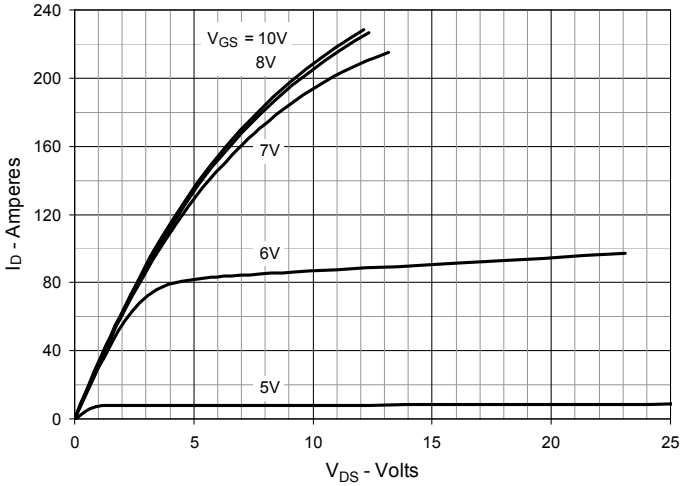


Fig. 3. Output Characteristics @ T_J = 125ºC

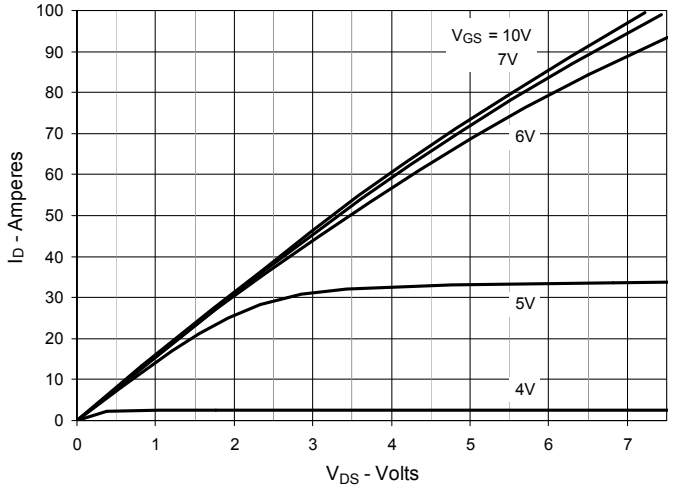


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 47A Value vs. Junction Temperature

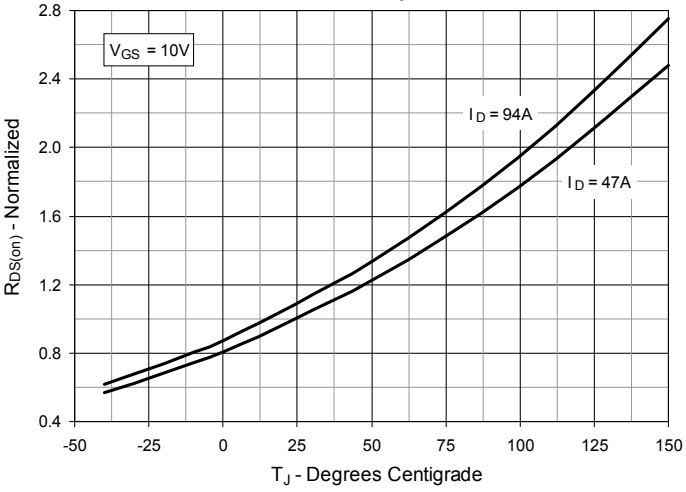


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 47A Value vs. Drain Current


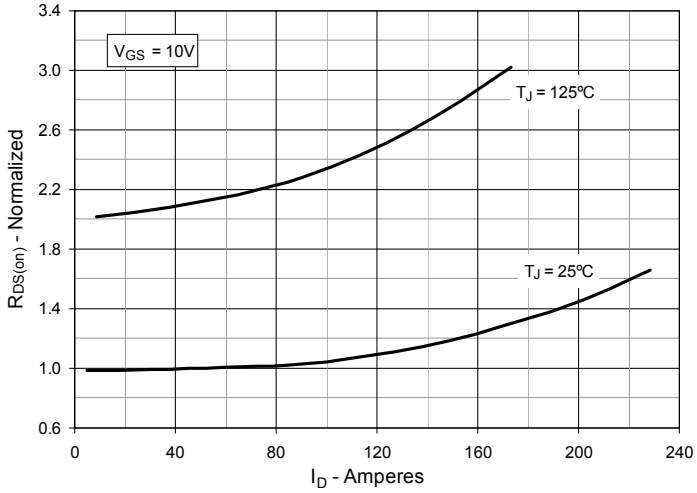


Fig. 6. Maximum Drain Current vs. Case Temperature

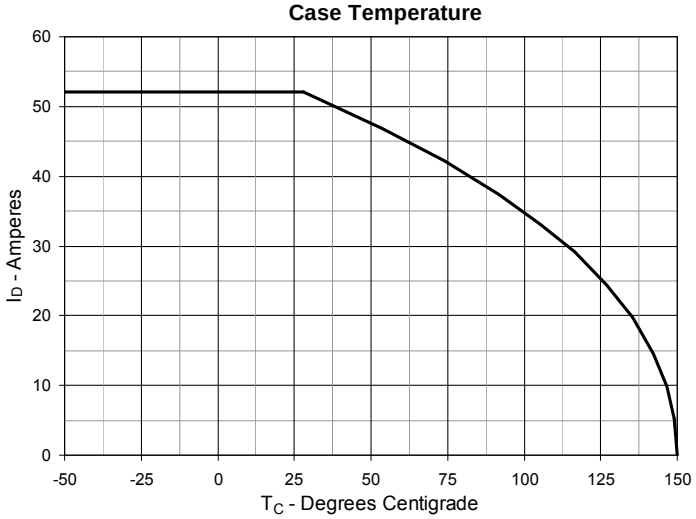

© 2014 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

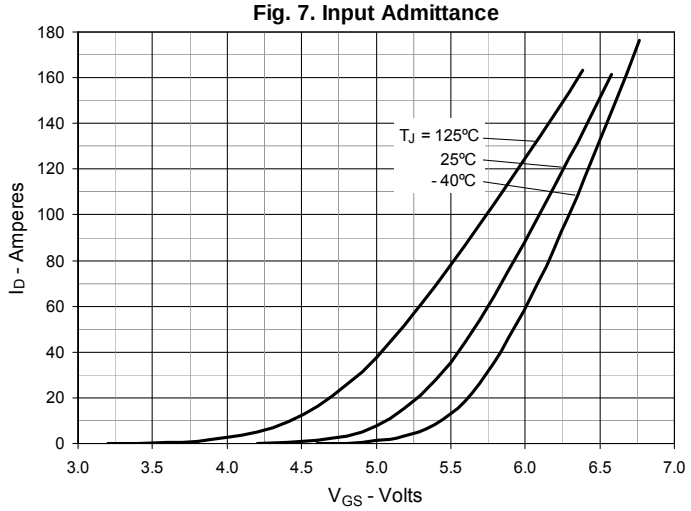


Fig. 8. Transconductance

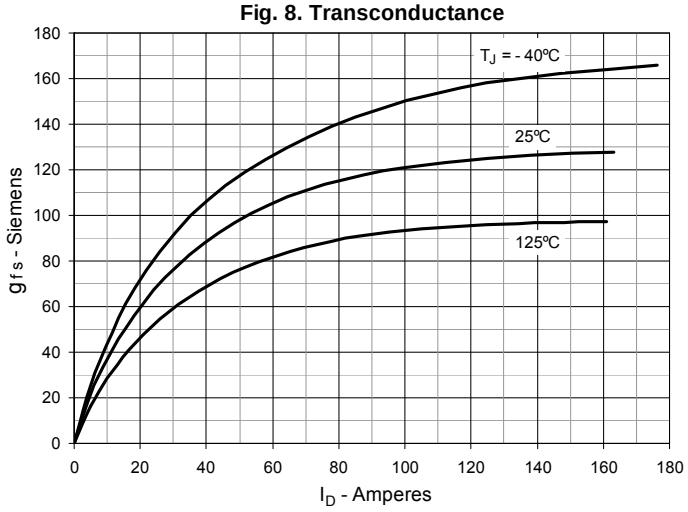


Fig. 9. Forward Voltage Drop of Intrinsic Diode

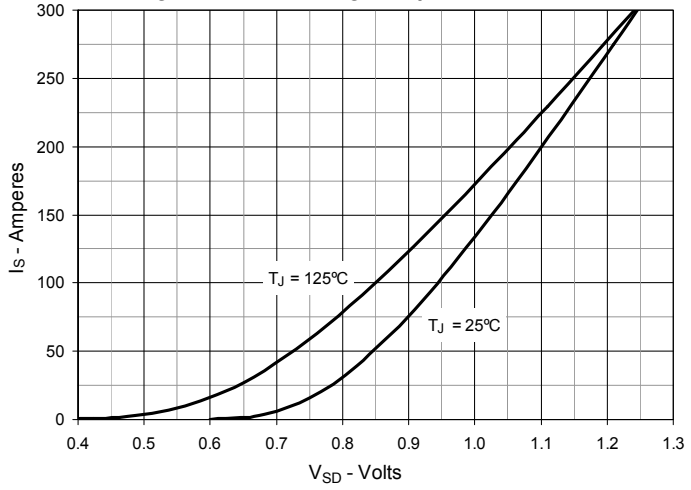


Fig. 10. Gate Charge

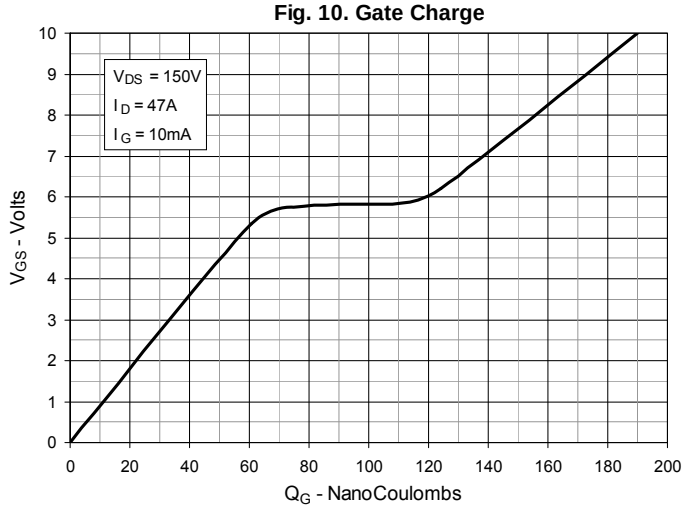


Fig. 11. Capacitance


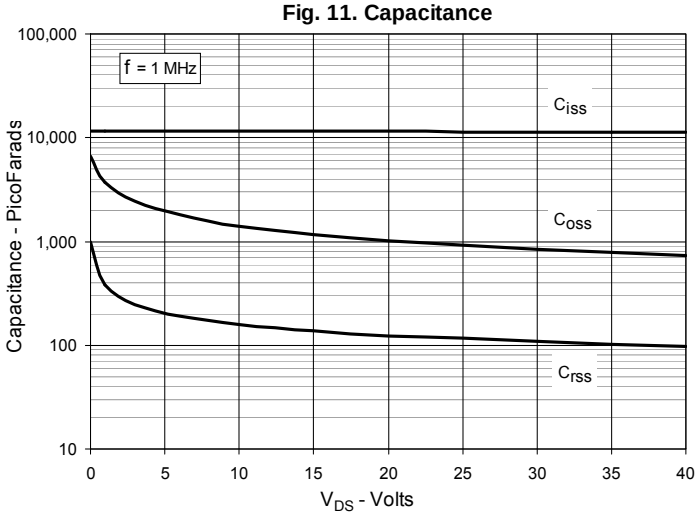


Fig. 12. Forward-Bias Safe Operating Area @ T_C = 25ºC

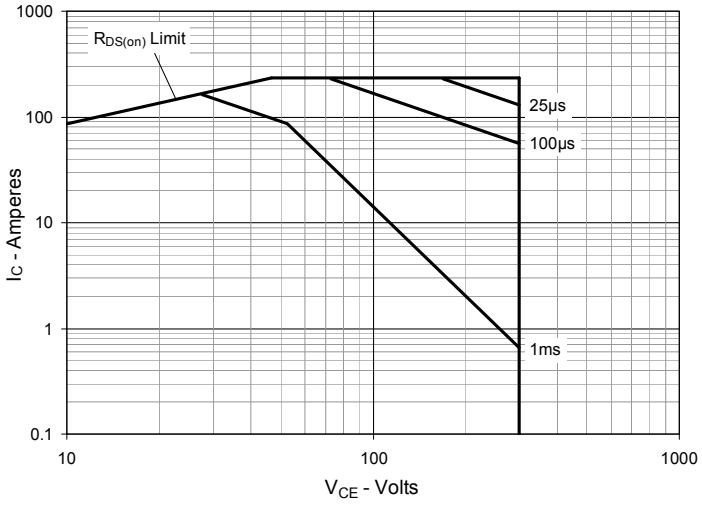

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

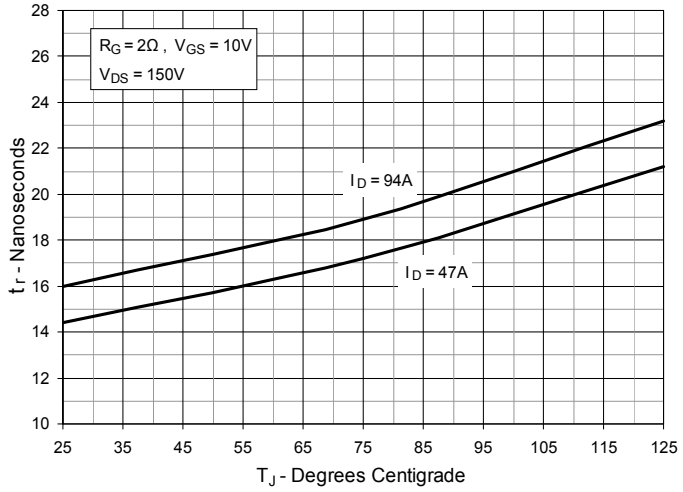


Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

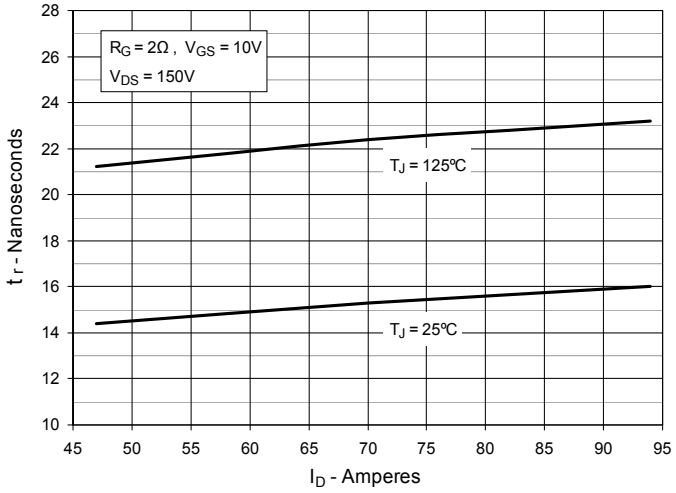


Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

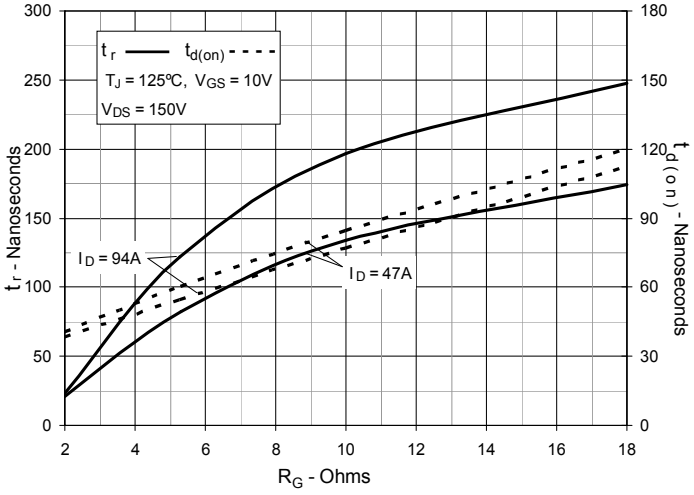


Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

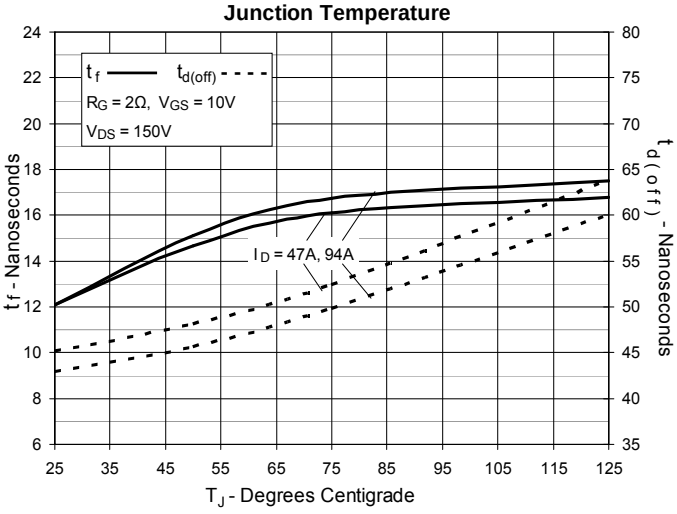


Fig. 17. Resistive Turn-off Switching Times vs. Drain Current



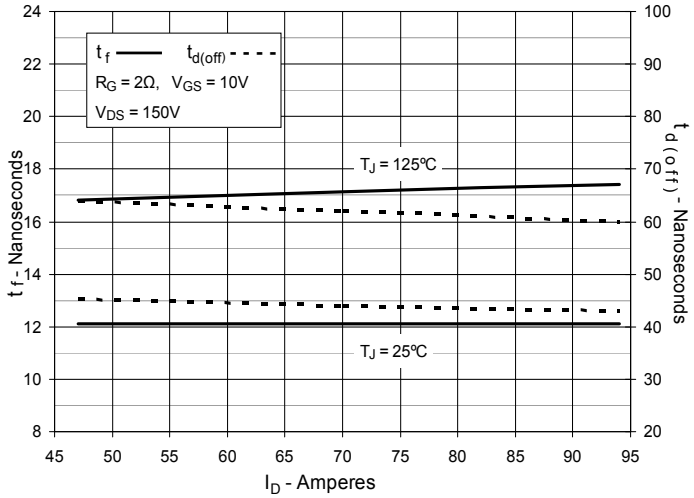


Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance

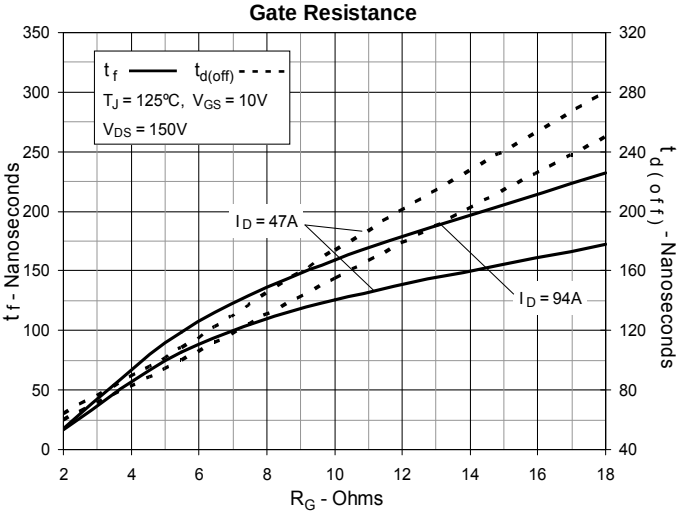


© 2014 IXYS CORPORATION, All Rights Reserved


Fig. 19. Maximum Transient Thermal Impedance

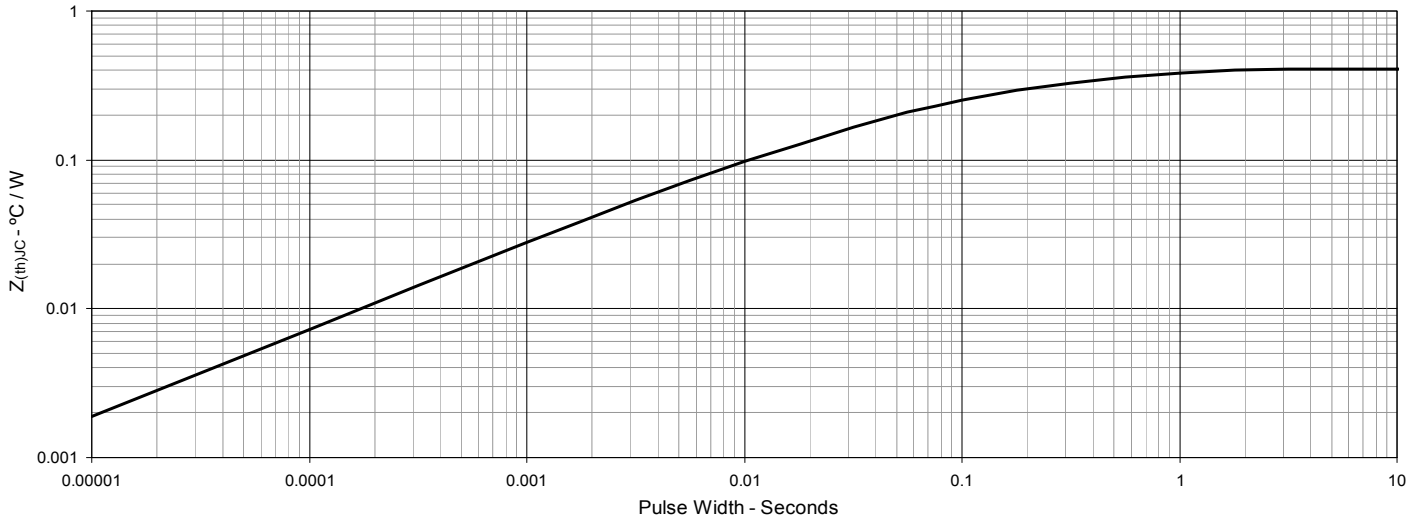


SMPD OUT LINE

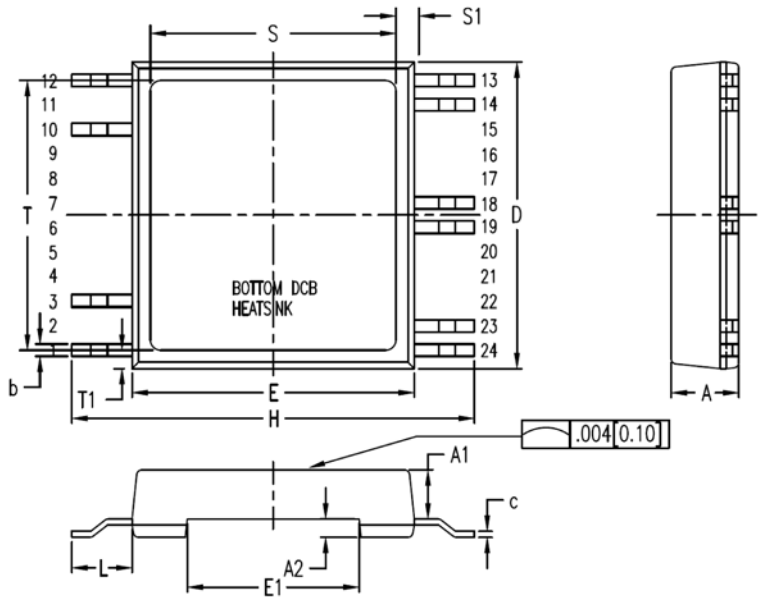

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.209	.224	5.30	5.70
A1	.154	.161	3.90	4.10
A2	.055	.063	1.40	1.60
b	.035	.045	0.90	1.15
c	.018	.026	0.45	0.65
D	.976	.994	24.80	25.25
E	.898	.915	22.80	23.25
E1	.543	.559	13.80	14.20
e	.079 BSC		2.00 BSC	
e1	.157 BSC		4.00 BSC	
e2	.315 BSC		8.00 BSC	
H	1.272	1.311	32.30	33.30
L	.181	.209	4.60	5.30
L1	.051	.067	1.30	1.70
L2	.000	.006	0.00	0.15
S	.748	.807	19.00	20.50
S1	.039	.079	1.00	2.00
T	.826	.886	21.00	22.50
T1	.039	.079	1.00	2.00
∝	0	4°	0	4°

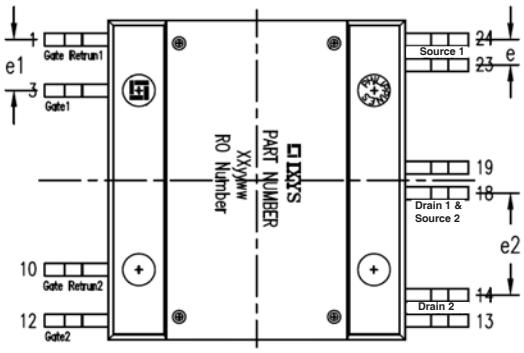



© 2014 IXYS CORPORATION, All Rights Reserved