


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		M	EC 0G3C 0766 04	27DEC04	BSV	JLG
			M1	REVISED PER ECO-09-020689	28AUG09	KK	AEG

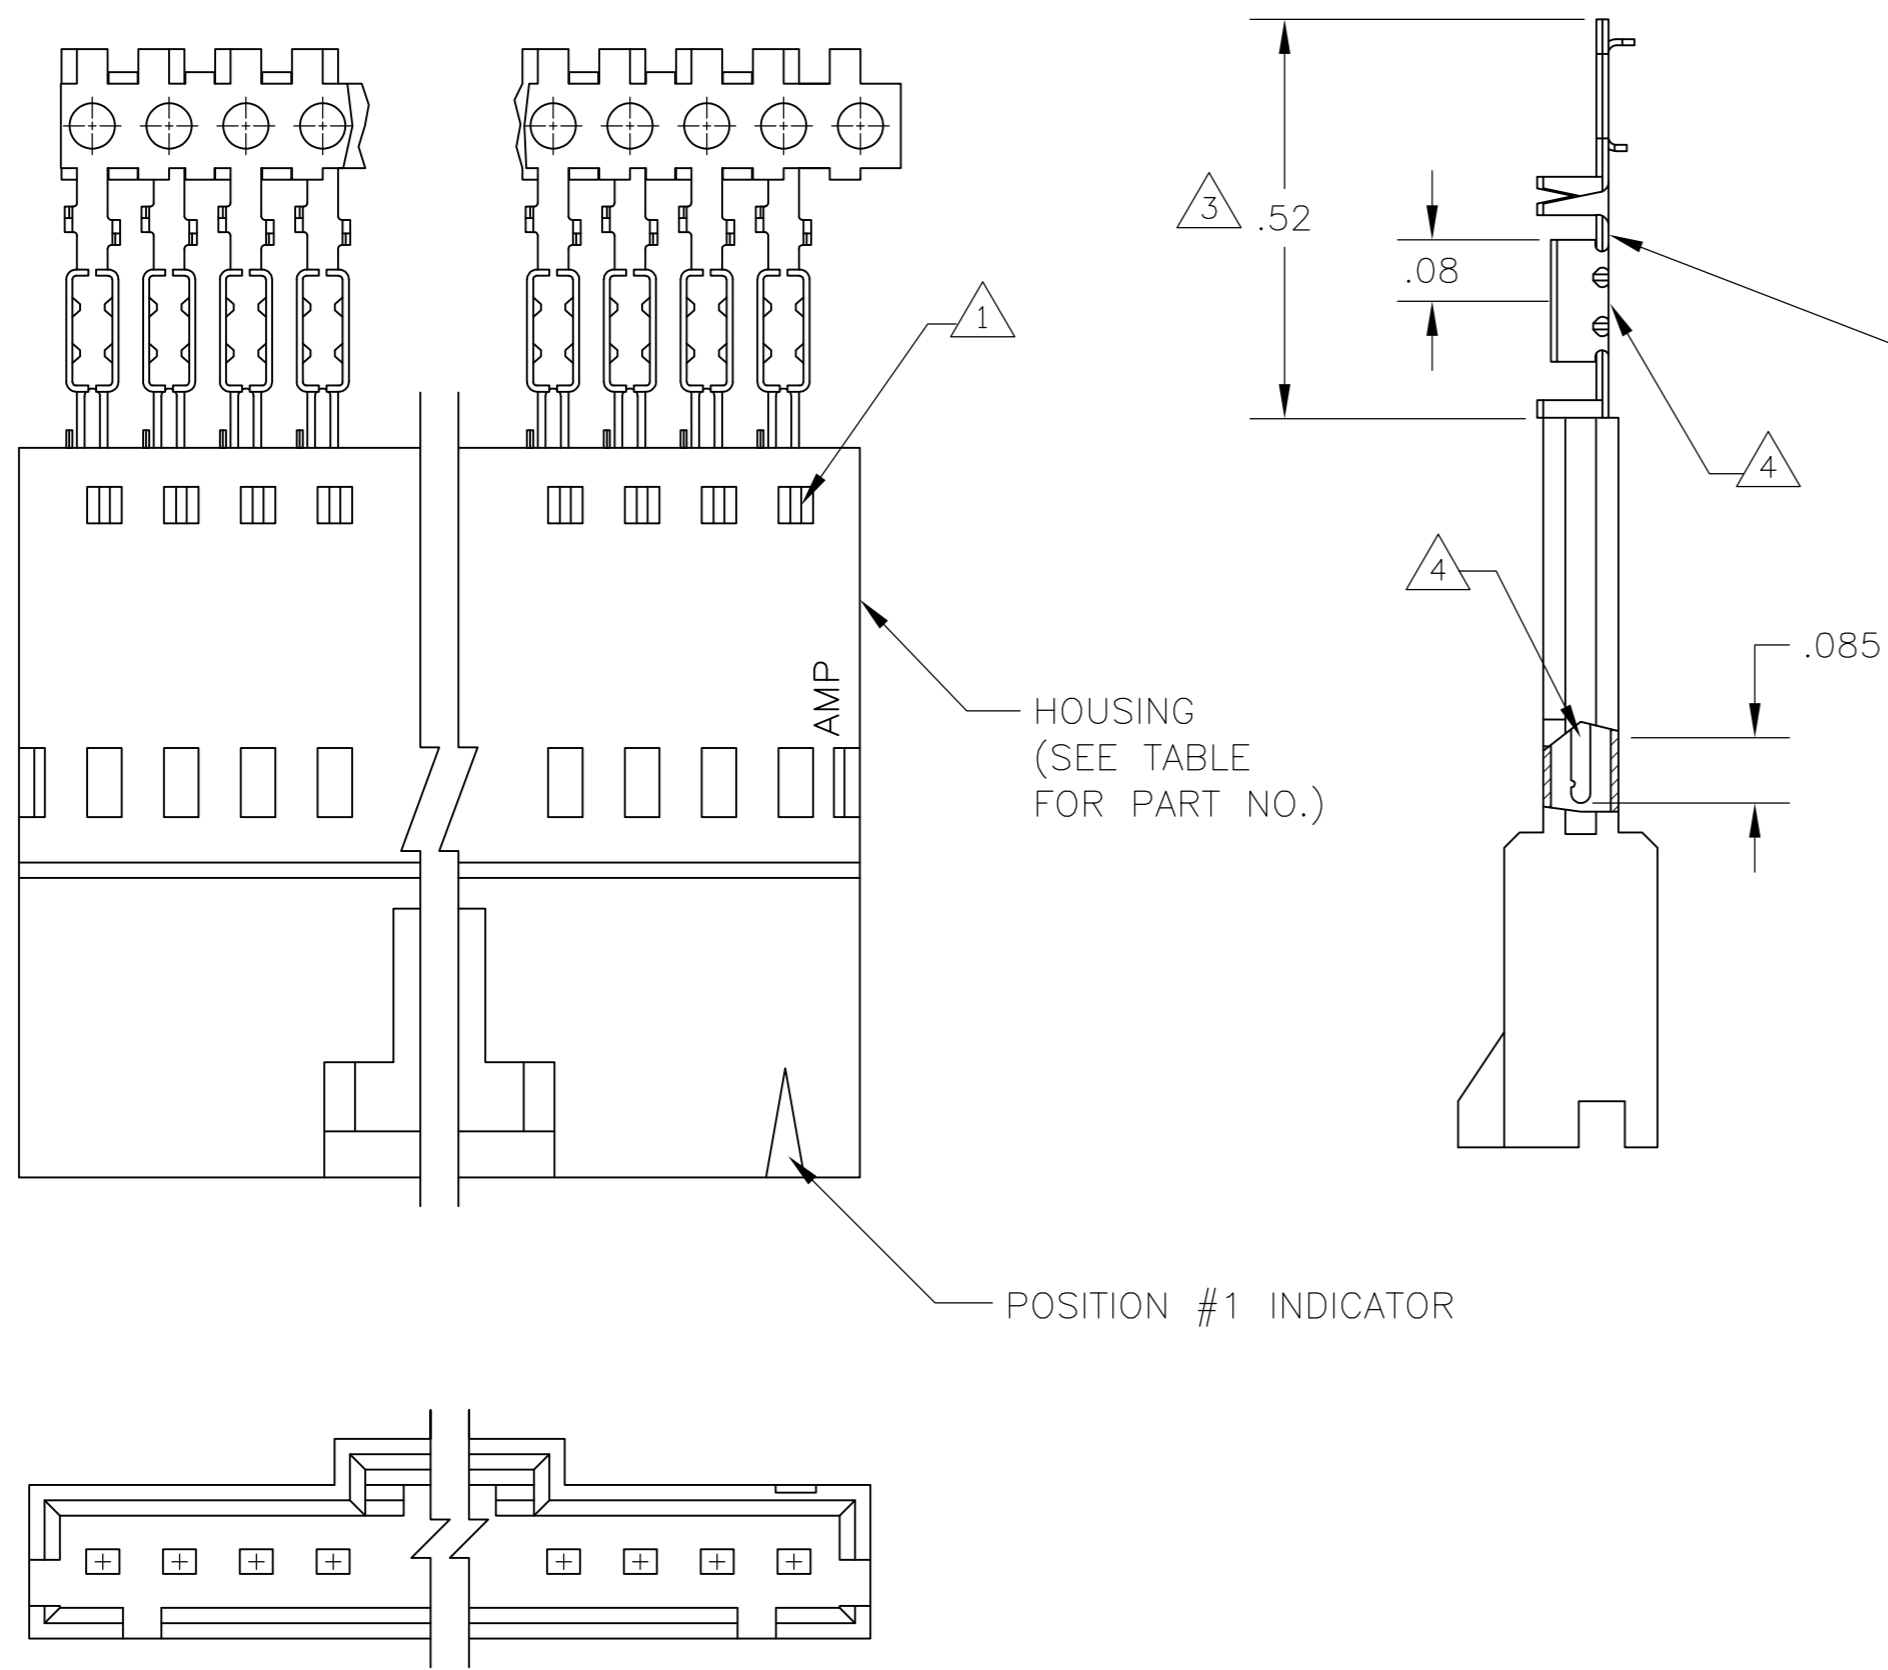

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

8	2-103653-4	25	9-7-103893-4
8	2-103653-3	24	9-7-103893-3
8	2-103653-2	23	9-7-103893-2
8	2-103653-1	22	9-7-103893-1
8	2-103653-0	21	9-7-103893-0
8	1-103653-9	20	9-6-103893-9
8	1-103653-8	19	9-6-103893-8
8	1-103653-7	18	9-6-103893-7
8	1-103653-6	17	9-6-103893-6
8	1-103653-5	16	6-103893-5
8	1-103653-4	15	9-6-103893-4
8	1-103653-3	14	9-6-103893-3
8	1-103653-2	13	9-6-103893-2
7	2-103653-4	25	9-2-103893-4
7	2-103653-3	24	9-2-103893-3
7	2-103653-2	23	9-2-103893-2
7	2-103653-1	22	9-2-103893-1
7	2-103653-0	21	9-2-103893-0
7	1-103653-9	20	9-1-103893-9
7	1-103653-8	19	9-1-103893-8
7	1-103653-7	18	9-1-103893-7
7	1-103653-6	17	9-1-103893-6
7	1-103653-5	16	1-103893-5
7	1-103653-4	15	9-1-103893-4
7	1-103653-3	14	9-1-103893-3
7	1-103653-2	13	9-1-103893-2
	SUPERSEDED BY 1-103946-1	12	1-103893-1
	SUPERSEDED BY 1-103946-0	11	1-103893-0
	SUPERSEDED BY 103946-9	10	103893-9
	SUPERSEDED BY 103946-8	9	103893-8
	SUPERSEDED BY 103946-7	8	103893-7
	SUPERSEDED BY 103946-6	7	103893-6
	SUPERSEDED BY 103946-5	6	103893-5
	SUPERSEDED BY 103946-4	5	103893-4
	SUPERSEDED BY 103946-3	4	103893-3
	SUPERSEDED BY 103946-2	3	103893-2
	SUPERSEDED BY 103946-1	2	103893-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103946
- 6 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 7 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
	1-103653-1	12	1-103893-1
	1-103653-0	11	1-103893-0
	103653-9	10	103893-9
	103653-8	9	103893-8
	103653-7	8	103893-7
	103653-6	7	103893-6
	103653-5	6	103893-5
	103653-4	5	103893-4
	103653-3	4	103893-3
	103653-2	3	103893-2
	103653-1	2	103893-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R BROWN 26JUL00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
CHK K WRIGHT 26JUL00		
APVD K WRIGHT 26JUL00		
NAME		
DIMENSIONS: INCHES	PRODUCT SPEC	SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO
0 PLC ± -	108-25034	A2 00779 C-103893
1 PLC ± -	114-25026	RESTRICTED TO
2 PLC ± .02	WEIGHT -	
3 PLC ± .005	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV M1
4 PLC ± -		
ANGLES ± -		
FINISH SEE TABLE		