

NEW!

AP Series Industrial Pushbutton Switch



Pushbutton

Features/Benefits

- IP67 sealed
- 1,000,000 life cycle
- Illumination / non-illumination
- Multiple colored caps
- Threaded or snap-in mounting
- SPST, normally open
- Caps available separately
- RoHS compliant

Typical Applications

- Harsh environments
- Off-Road
- Industrial
- Medical
- Transportation
- Joystick control modules
- Gaming
- Military



Specifications

FUNCTION: SPST Momentary, double break
 CONTACT ARRANGEMENT: N.O.
 MOUNTING TYPE:
 Snap-in (panel front) or threaded (nut with locking washer and panel gasket)

Mechanical

TOTAL TRAVEL: 2.1 ± 0.2 mm
 OPERATING POINT 1.55 ± 0.25 mm
 OVER TRAVEL: 0.6 ± 0.2 mm
 OPERATING FORCE: $4N \pm 0.5N$ standard configuration; other force option $2N \pm 0.5N$
 VIBRATION: 10-500 Hz 10g Max
 SHOCK: 60g 11ms sawtooth wave

Electrical

CONTACT RATING:
 200mA @ 24 V DC resistive
 100mA @ 50 V DC resistive
 400mA @ 32 V AC resistive
 125mA @ 125 V AC resistive
 DIELECTRIC STRENGTH: 1000 V AC min.
 INSULATION RESISTANCE: $1 \text{ G } \Omega @ 500 \text{ VDC}$
 INITIAL CONTACT RESISTANCE 50 m Ω max (without wire leads)
 BOUNCE TIME: <5 ms

Materials

HOUSING: PBT
 BASE: PBT
 CAP: PBT
 ACTUATOR:
 Illuminated: Clear polycarbonate
 Non-illuminated: PBT
 INTERNAL SEAL: Silicone rubber
 TERMINALS: Copper alloy, gold over silver plating
 MOVABLE CONTACT: Copper alloy, gold over silver plating
 TERMINAL SEAL: Epoxy

Operating Environment

OPERATING TEMPERATURE: -40°C to 85°C (+105°C non-illuminated)
 OPERATING LIFE: 1,000,000 cycles

Process Environment

SEALING: IP67

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, please contact Customer Service.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box.

Designation _____ AP AP Series		Operating Force _____ 2 2 Newtons 4 4 Newtons		Actuator Style _____ D Dome / Convex C Concave E Extended Dome N None		Actuator Color _____ 0 No Cap 2 Black 3 Red 4 Orange 5 Yellow 6 Green		Illumination _____ 00 No LED* 01 Super White 02 Bi-color; Red (Green) 03 Red 05 Amber 06 Green 07 Super Blue 08 Bi-color; Amber (Green)		Terminal Seal _____ E Epoxy All models are epoxy sealed		Contact Material _____ B Gold		Termination _____ Z Solder Lug W 12" Wire Leads 22 AWG C**** PC Terminals		Bushing Style** _____ S Snap-in plastic T*** Threaded plastic	
---	--	--	--	--	--	--	--	--	--	---	--	--	--	--	--	--	--

Please contact Customer Service for additional colors and paint / laser etched button options.



* No LED available in short body only

** Metal threaded bushing available, contact Customer Service
 *** T bushing style includes: 1 lockwasher, 1 hex nut & 1 panel seal washer
 **** Illumination not available with PC Terminals
 Contact Customer Service for additional hardware options.

Specifications and dimensions subject to change




NEW!

AP Series Industrial Pushbutton Switch



STANDARD VIEW

Pushbutton


A

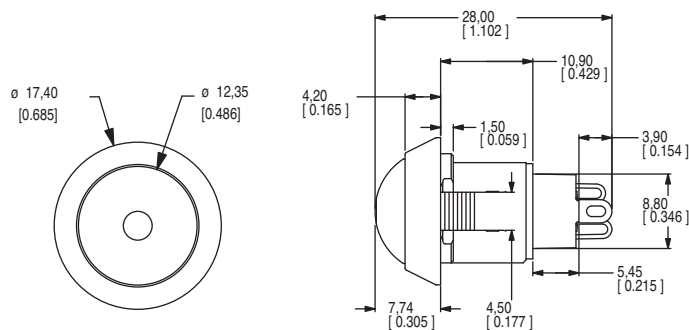

ELECTRICAL SCHEMATIC




OPERATING FORCE




OPTION CODE	OPERATING FORCE
2	2 N, 200 g
4	4 N, 400 g


ACTUATOR STYLE







D DOME / CONVEX

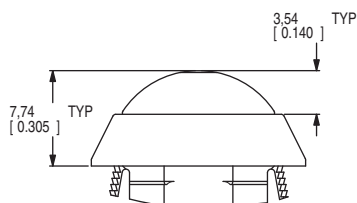

E EXTENDED DOME



C CONCAVE

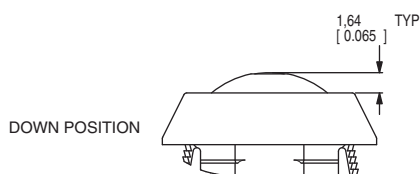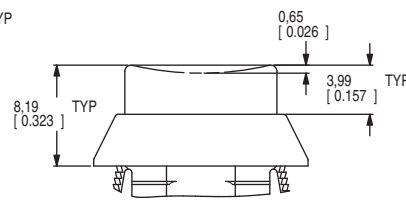


ACTUATOR COLOR



OPTION CODE	ACTUATOR COLOR
0	No Cap
2	Black
3	Red
4	Orange
5	Yellow
6	Green

For additional colors please contact Customer Service.



C&K

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

NEW!

AP Series Industrial Pushbutton Switch



A

Pushbutton

ILLUMINATION




OPTION CODE	ILLUMINATION TYPE	TYPICAL INTENSITY* MIN MAX		PEAK WAVELENGTH	Vf Forward Voltage
		(mcd)		(nm)	
00	Model without illumination	N/A		N/A	
01	LED Super White	4,000	5,000	N/A	3.5
02	LED Bi-Color – Red (Green)	10	20	635/565	2.0
03	LED Red	4	8	700	2.0
05	LED Amber	35	50	610	2.0
06	LED Green	35	50	565	2.0
07	LED Super Blue	800	1,500	470	3.8
08	LED Bi-Color – Amber (Green)	10	10	585/565	2.0

*LED FORWARD CURRENT: 20 mA
LED FORWARD VOLTAGE: see chart above
LED REVERSE VOLTAGE: 5.0 V MAX

* For information on specific and custom LED, please contact Customer Service.

NOTE:



For bi-color LED's the polarity must be reversed to alternate the color





BUSHING STYLE




S SNAP-IN

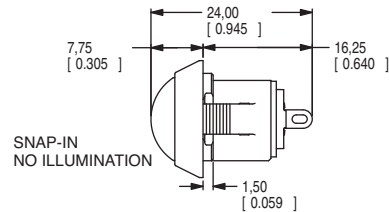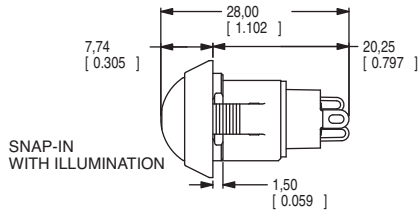


T THREADED PLASTIC

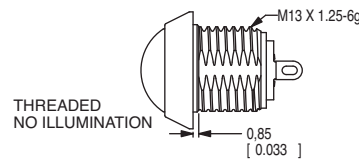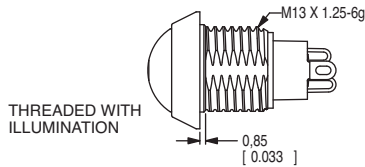

PANEL CUTOUT



PANEL THICKNESS	DIM A (± 0.05 mm)	DIM B (± 0.05 mm)
1 mm [0.039 in]	13.70 mm [0.539 in]	13.00 mm [0.512 in]
2 mm [0.079 in]	13.80 mm [0.539 in]	13.00 mm [0.512 in]
3 mm [0.118 in]	13.90 mm [0.547 in]	13.10 mm [0.516 in]
THREADED BODY MIN PANEL THICKNESS 1 mm	13.70 mm [0.539 in]	13.00 mm [0.512 in]



Third Angle Projection

C&K

A 0.1mm min. chamfer on the leading edge of the mounting hole is recommended for snap-in version.

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change



A

Pushbutton




AP Series Industrial Pushbutton Switch

NEW!

TERMINATION







Z SOLDER LUG


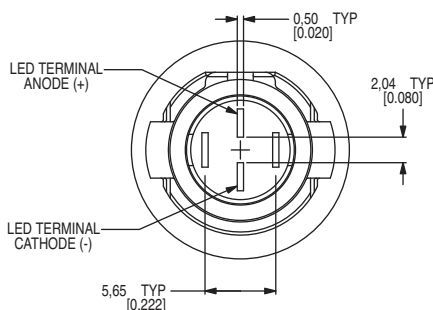
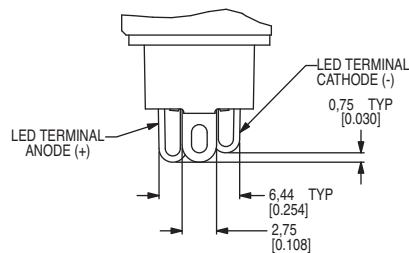



C PC TERMINALS

**** Illumination not available with PC Terminals

PCB HOLE PATTERN
BOARD VIEW

W 12" WIRE LEADS 22 AWG

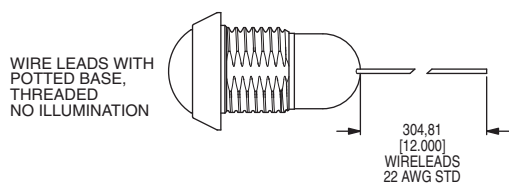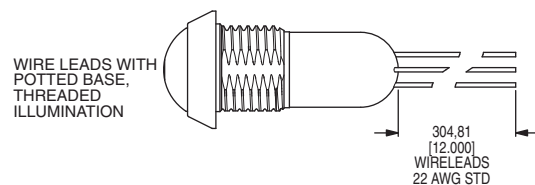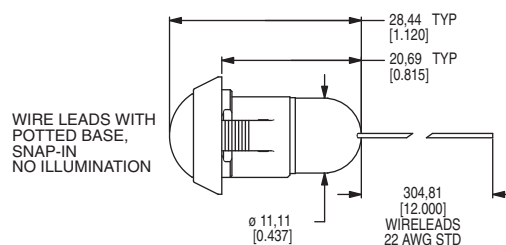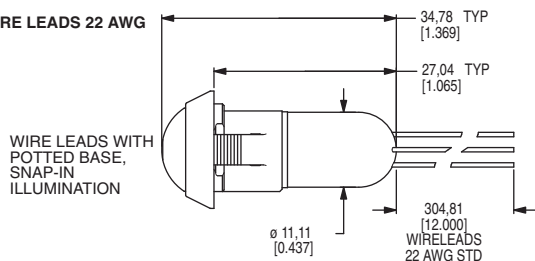Third Angle
Projection

C&K

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

NEW!

AP Series Industrial Pushbutton Switch



A

Pushbutton

CONTACT MATERIAL



B GOLD

OPTION CODE	CONTACT MATERIAL
B	Gold

TERMINAL SEAL




E EPOXY

All models are epoxy sealed

HARDWARE


LOCK WASHER

Part Number 647D00000




HEX NUT

Part number 515D00000

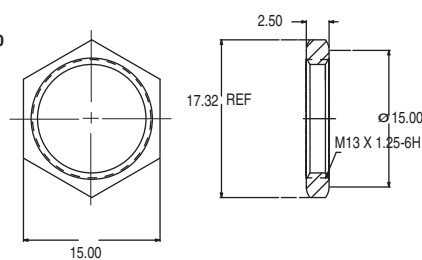


PANEL SEAL

Part Number 655D00000

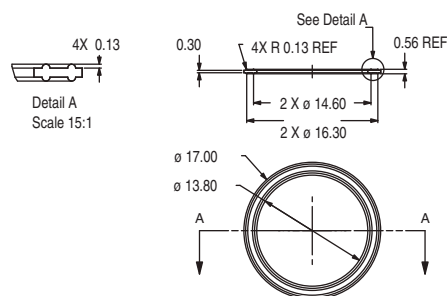

Caps available on next page

C&K



Third Angle Projection

Dimensions are shown: *mm (inches)*
Specifications and dimensions subject to change



AP Series Industrial Pushbutton Switch

NEW!

AVAILABLE CAPS

A

Pushbutton





481 X XX 00X
Cap
Actuator Style
Cap Color
Hole / No Hole



OPTION	CAP COLOR
02	BLACK
03	RED
04	ORANGE
05	YELLOW
06	GREEN

PART NUMBER	HOLE	ACTUATOR STYLE
481DXX000	NO	DOME
481DXX001	YES	DOME
481CXX000	NO	CONCAVE
481CXX001	YES	CONCAVE
481EXX000	NO	EXTENDED DOME
481EXX001	YES	EXTENDED DOME



D DOME



C CONCAVE



E EXTENDED DOME



C&K



Third Angle
Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change