

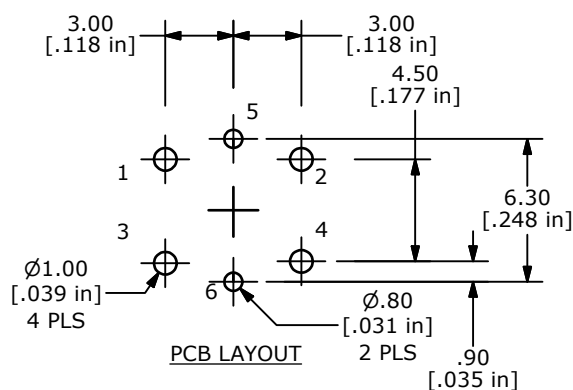
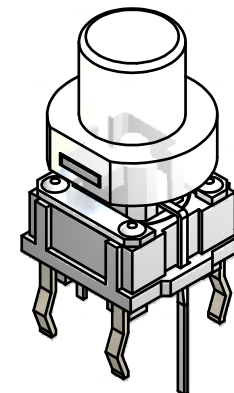
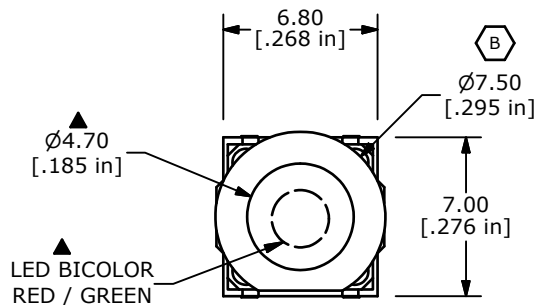


CIRCUIT: SPST ▲

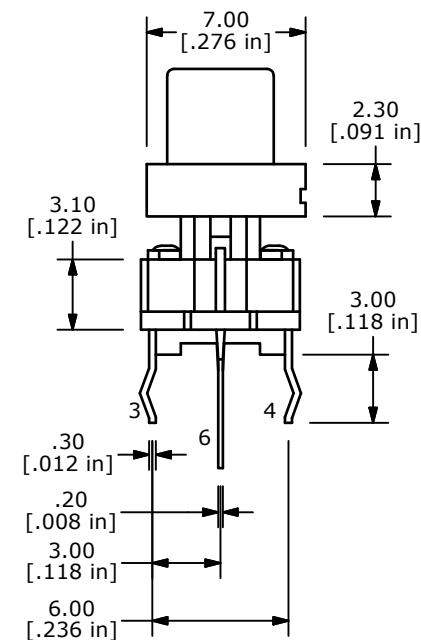


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA, 12VDC
- ▲ 4. TRAVEL: 0.2 ±0.1
5. OPERATING FORCE: 160±50gf
6. CONTACT RESISTANCE: 100mΩ MAX
7. CONTACT MATERIAL: SILVER
8. OPERATING LIFE: 500,000 CYCLES
9. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
10. DIELECTRIC STRENGTH: 500VDC FOR 1 MINUTE
- ▲ 11. LED COLOR: RED / GREEN
12. OPERATING TEMPERATURE: -20° C TO 70° C
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER

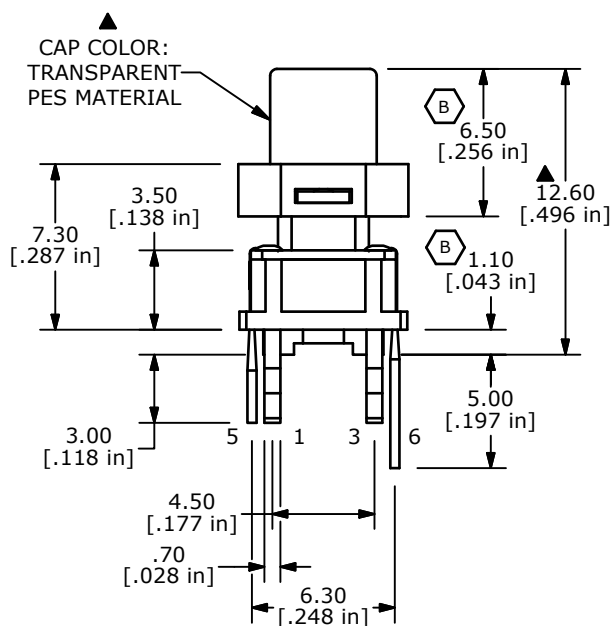

▲ LED SPECS	UNITS	RED LED	GREEN LED
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	1.95 TYP. - 2.5 MAX	2.1 TYP. - 2.5 MAX
LUMINOUS INTENSITY	mcd	1800	150



TITLE TL1265RGQTCLR

SCALE 3:1

DATE 8/24/2011

DR BGL

DWG B200036

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	20168	DRAWING UPDATE	9/20/11	BGL
A	20111	RELEASE FOR PRODUCTION	8/24/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY