
Resistors

High Temperature TaNFilm® Surface Mount Voltage Divider

PFC HT Divider Series

- Popular 1206 Chip Size
- 100Ω to $25K\Omega$ per resistor
- Operating temperature to 200°C
- Gold and 100% matte tin terminations available
- TaNFilm® element provides excellent stability in harsh environments



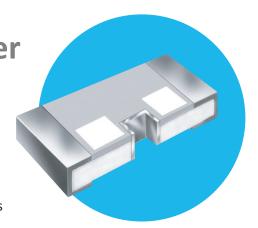


Electrical Data

Characteristic	Each Resistor	Total Resistance	
Resistance Range	100 - 25ΚΩ	50ΚΩ	
Power Rating	100mW	125mW	
Absolute TCR	to ±25ppm/°C		
Tracking TCR	to ±5ppm/°C		
Maximum Voltage Rating	100 volts		
Operating Temperature Range	-65°C to +200°C		
Noise	Less than -25 db		
Termination	Wire/epoxy bondable gold or 100% matte tin (Pb-free)		

Environmental Data

Environmental Test MIL-PRF-55342	Maximum ∆R	Maximum ∆Ratio
Thermal Shock	±0.10%	±0.01%
Short Time Overload	±0.05%	±0.01%
High Temperature Exposure	±0.10%	±0.02%
Effects of Solder	±0.10%	±0.02%
Moisture Resistance	±0.10%	±0.05%
Life: 1000 hours 200°C, no load	±1.0%	±0.10%
Life: 1000 hours, 150°C, rated power	±0.5%	±0.05%

Power Derating Curve

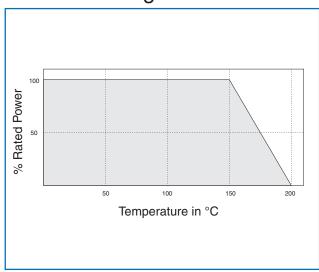


High Temperature TaNFilm® Surface Mount Voltage Divider






Physical Data

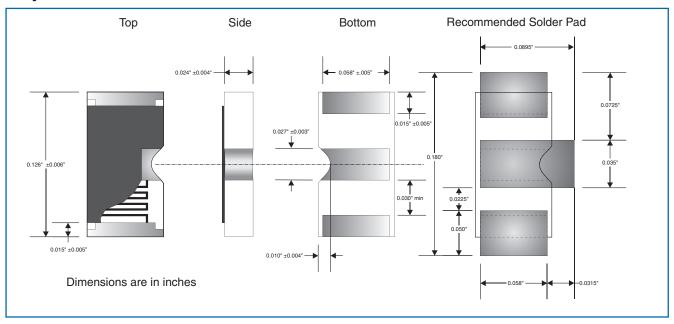

Ordering Data

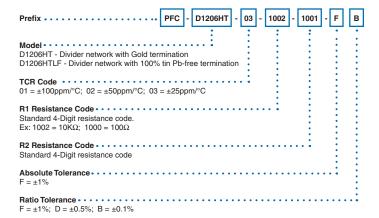

Packaging Data

