

Dual Buck chopper
Trench + Field Stop IGBT4
Power Module

V_{CES} = 1200V
I_C = 60A @ Tc = 80°C

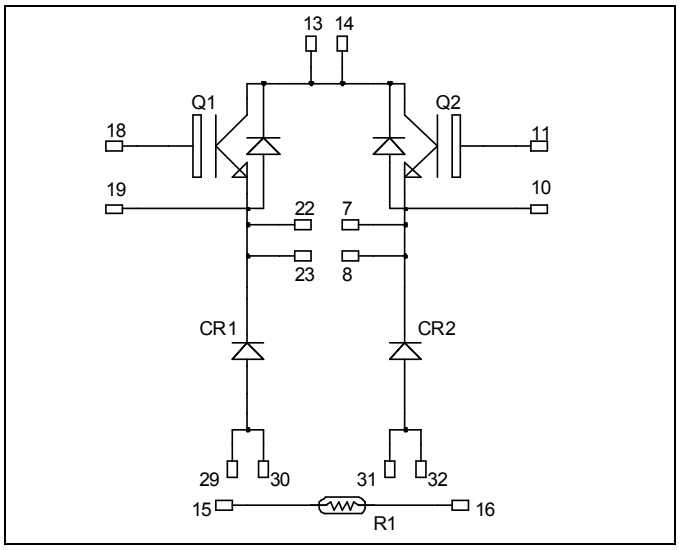

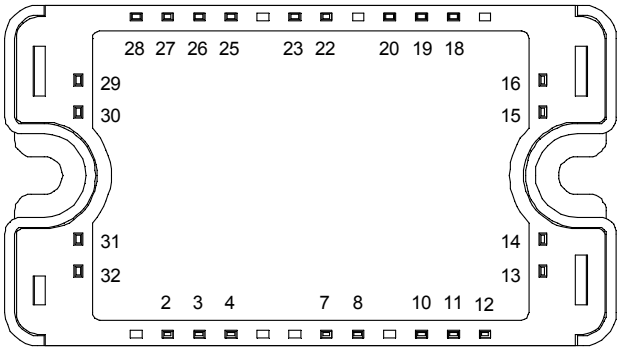

All multiple inputs and outputs must be shorted together
Example: 13/14 ; 29/30 ; 22/23 …

Application

- AC and DC motor control
- Switched Mode Power Supplies

Features

- Trench + Field Stop IGBT 4 Technology
  - Low voltage drop
  - Low leakage current
  - Low switching losses
  - Soft recovery parallel diodes
  - Low diode VF
  - Low leakage current
  - RBSOA and SCSOA rated
  - Symmetrical design
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration
- Internal thermistor for temperature monitoring

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- Easy paralleling due to positive TC of VCEsat
- Each leg can be easily paralleled to achieve a single buck of twice the current capability
- RoHS compliant

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{CES}	Collector - Emitter Breakdown Voltage		1200	V
I_C	Continuous Collector Current	T_C = 25°C	80	A
		T_C = 80°C	60	
I_{CM}	Pulsed Collector Current	T_C = 25°C	100	
V_{GE}	Gate – Emitter Voltage		±20	V
P_D	Maximum Power Dissipation	T_C = 25°C	280	W
RBSOA	Reverse Bias Safe Operating Area	T_j = 150°C	100A @ 1100V	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_{CES}	Zero Gate Voltage Collector Current	V_{GE} = 0V, V_{CE} = 1200V				250	µA
$V_{CE(sat)}$	Collector Emitter saturation Voltage	V_{GE} = 15V, I_C = 50A	T_j = 25°C		1.85	2.25	V
			T_j = 150°C		2.25		
$V_{GE(th)}$	Gate Threshold Voltage	V_{GE} = V_{CE} , I_C = 1.6mA		5.0	5.8	6.5	V
I_{GES}	Gate – Emitter Leakage Current	V_{GE} = 20V, V_{CE} = 0V				400	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
C_{ies}	Input Capacitance	V_{GE} = 0V V_{CE} = 25V f = 1MHz			2770		pF
C_{oes}	Output Capacitance				205		
C_{res}	Reverse Transfer Capacitance				160		
Q_G	Gate charge	V_{GE}= ±15V ; V_{CE}=600V I_C=50A			0.38		µC
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C) V_{GE} = ±15V V_{CE} = 600V I_C = 50A R_G = 8.2Ω			130		ns
T_r	Rise Time				20		
$T_{d(off)}$	Turn-off Delay Time				300		
T_f	Fall Time				45		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (150°C) V_{GE} = ±15V V_{CE} = 600V I_C = 50A R_G = 8.2Ω			150		ns
T_r	Rise Time				35		
$T_{d(off)}$	Turn-off Delay Time				350		
T_f	Fall Time				80		
E_{on}	Turn-on Switching Energy	V_{GE} = ±15V V_{CE} = 600V I_C = 50A R_G = 8.2Ω	T_J = 25°C		3.8		mJ
			T_J = 150°C		5.5		
E_{off}	Turn-off Switching Energy		T_J = 25°C		2.5		mJ
			T_J = 150°C		4.5		
I_{sc}	Short Circuit data	V_{GE} ≤15V ; V_{Bus} = 900V t_p ≤10µs ; T_j = 150°C			200		A

Chopper diode ratings and characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
V_{RRM}	Maximum Peak Repetitive Reverse Voltage			1200			V
I_{RM}	Maximum Reverse Leakage Current	V_R=1200V	T_j = 25°C			100	µA
			T_j = 125°C			500	
I_F	DC Forward Current		Tc = 80°C		60		A
V_F	Diode Forward Voltage	I_F = 60A			2.5	3	V
		I_F = 120A			3		
		I_F = 60A	T_j = 125°C		1.8		
t_{rr}	Reverse Recovery Time	I_F = 60A V_R = 800V di/dt =200A/µs	T_j = 25°C		265		ns
			T_j = 125°C		350		
Q_{rr}	Reverse Recovery Charge		T_j = 25°C		560		nC
			T_j = 125°C		2890		

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
R_{thJC}	Junction to Case Thermal Resistance		IGBT			0.53	°C/W
			Diode			0.9	
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			2500			V
T_J	Operating junction temperature range			-40		175	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To heatsink	M4	2.5		4.7	N.m
Wt	Package Weight					110	g


Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	Characteristic		Min	Typ	Max	Unit
R_{25}	Resistance @ 25°C			50		kΩ
$\Delta R_{25}/R_{25}$				5		%
$B_{25/85}$	T_{25} = 298.15 K			3952		K
$\Delta B/B$		T_C=100°C		4		%

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature
R_T: Thermistor value at T


SP3 Package outline (dimensions in mm)

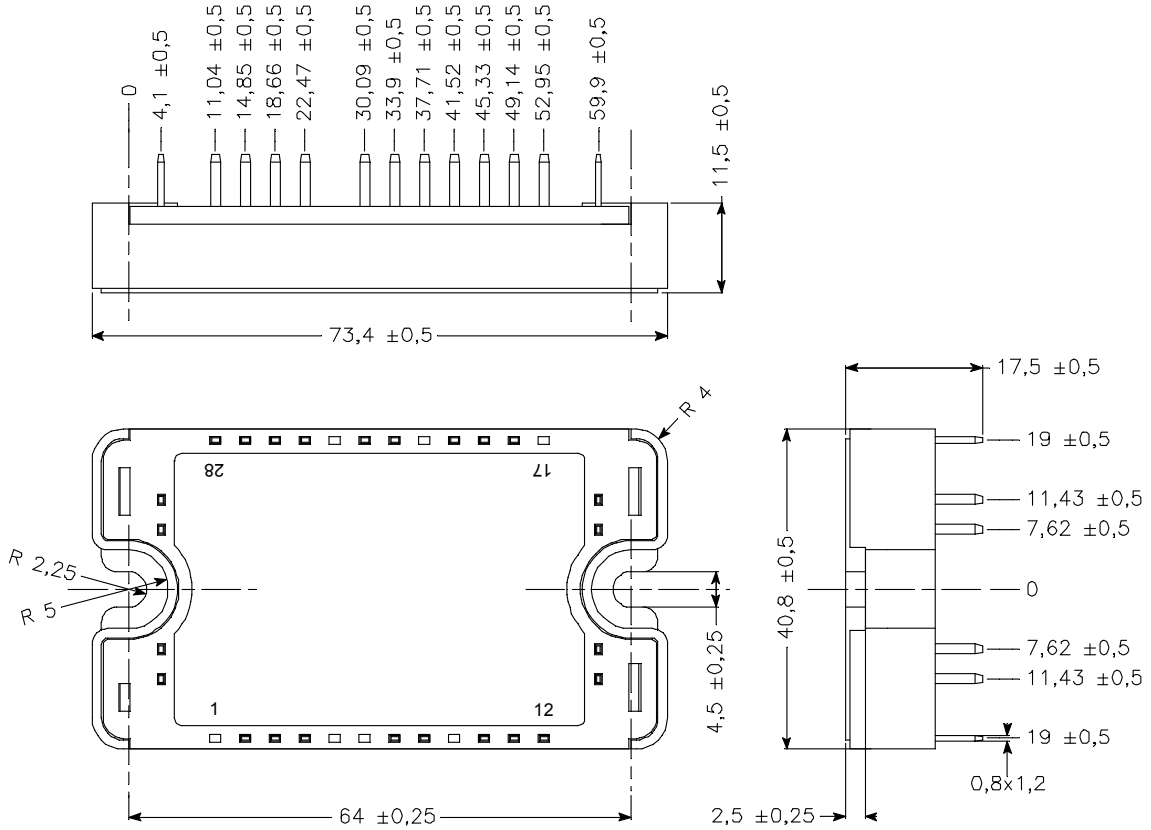


See application note 1901 - Mounting Instructions for SP3 Power Modules on www.microsemi.com

Typical Performance Curve


Output Characteristics (V_{GE}=15V)

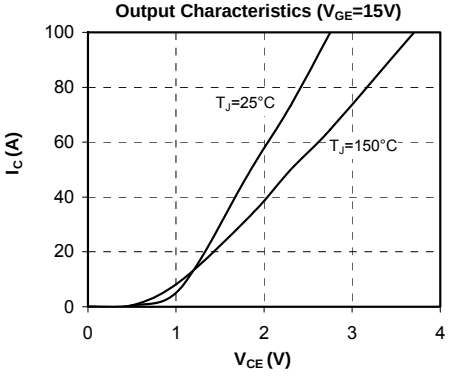


Output Characteristics

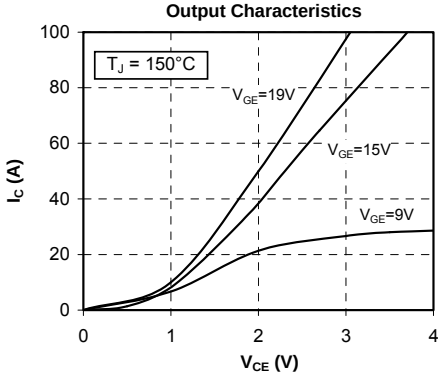


Transfert Characteristics

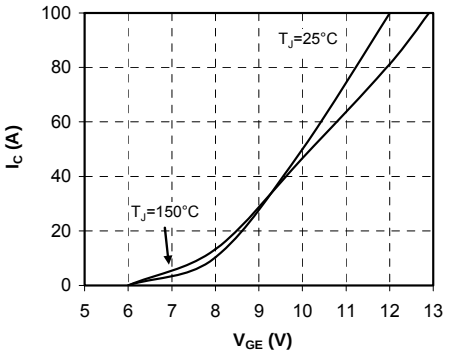


Energy losses vs Collector Current

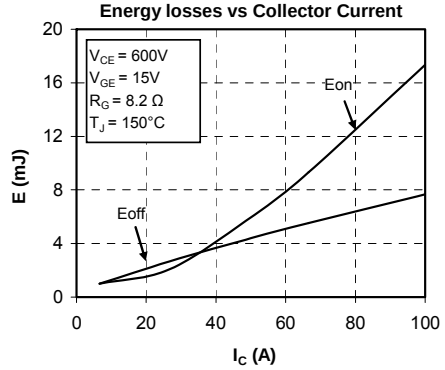


Switching Energy Losses vs Gate Resistance

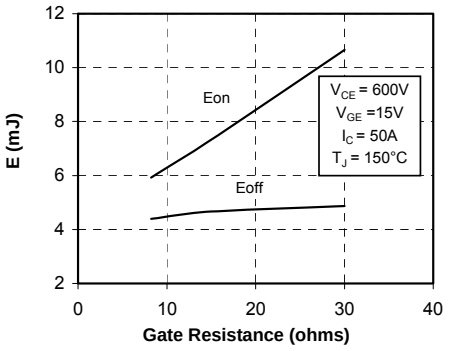


Reverse Bias Safe Operating Area

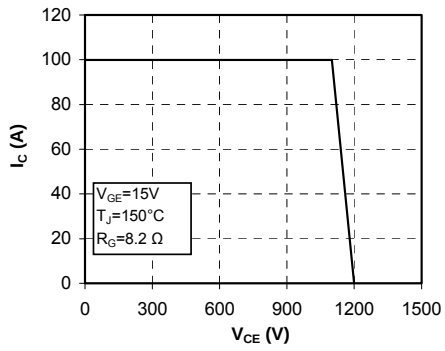


maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration

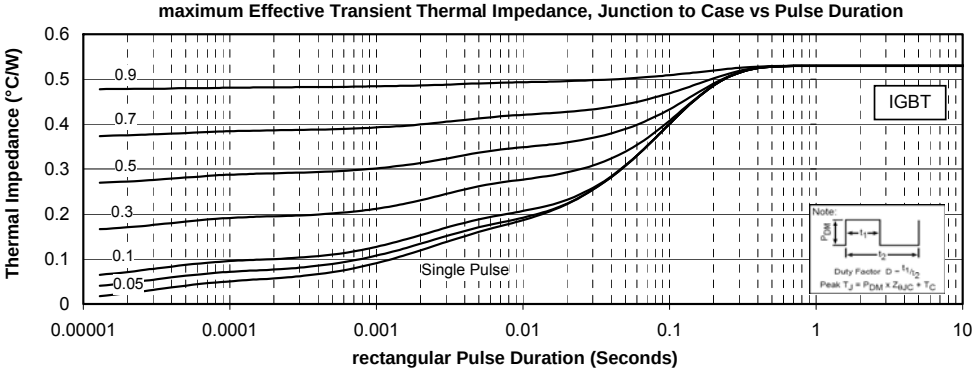


Operating Frequency vs Collector Current

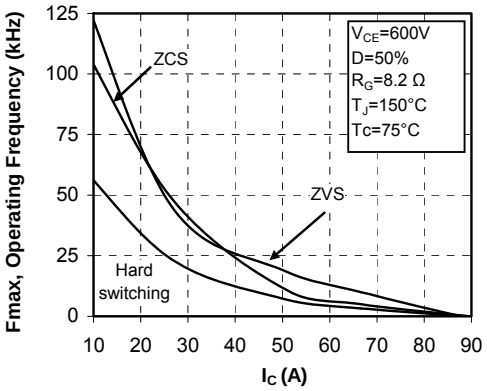

Forward Characteristic of diode

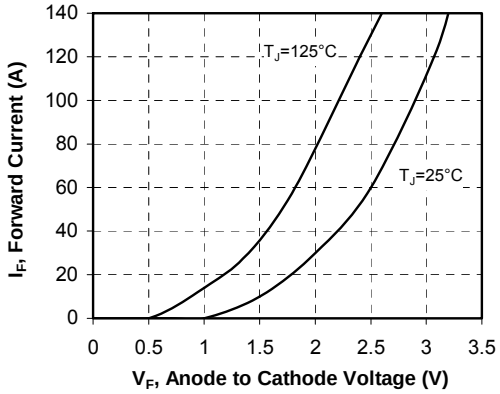

maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration

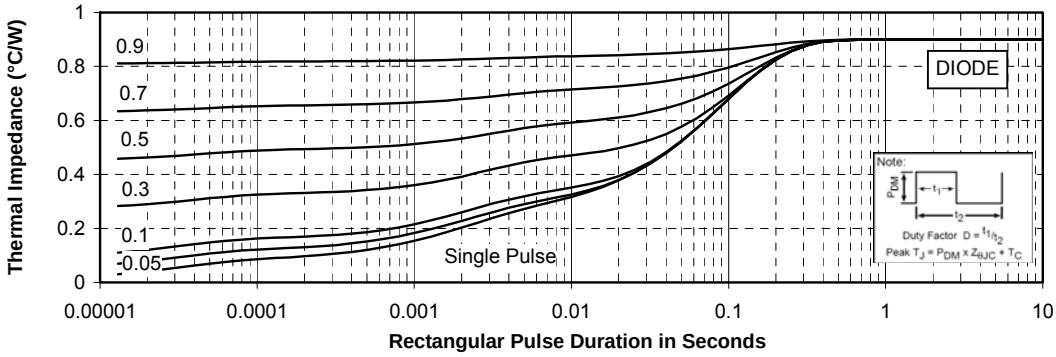

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 6,939,743 7,352,045 5,283,201 5,801,417 5,648,283 7,196,634 6,664,594 7,157,886 6,939,743 7,342,262 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.