

RXX00F SERIES

HIGH VOLTAGE FAST RECOVERY RECTIFIER

产

品

规

格

确

认

书

R2500F THRU R5000F

HIGH VOLTAGE FAST RECOVERY RECTIFIER



康比電子
HORNBY ELECTRONIC


REVERSE VOLTAGE: 2500 to 5000 VOLTS
FORWARD CURRENT: 0.2 AMPERE

FEATURES

- Fast switching
- Low leakage
- High current capability
- High surge capability
- High reliability

MECHANICAL DATA

Case: Molded plastic, DO-15
Terminals: Axial leads, solderable per MIL-STD-202,
method 208 guaranteed
Polarity: Band denotes cathode
Mounting position: Any
Weight: 0.015ounce, 0.4gram

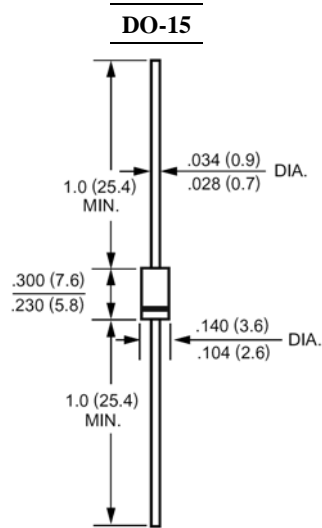

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	R2500F	R3000F	R4000F	R5000F	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	2500	3000	4000	5000	Volts
Maximum RMS Voltage	V_{RMS}	1750	2100	2800	3500	Volts
Maximum DC Blocking Voltage	V_{DC}	2500	3000	4000	5000	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_A=50^\circ\text{C}$	$I_{(AV)}$	0.2				Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30				Amp
Maximum Forward Voltage at 0.2A	V_F	4.0	5.0	6.5		Volts
Maximum Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$	I_R	5.0				uAmp
Maximum Full Load Reverse Current Average, Full Cycle .375", (9.5mm) lead length at $T_L = 55^\circ\text{C}$		100				uAmp
Maximum Reverse Recovery Time (Note 1)	T_{RR}	500				nS
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150				°C

NOTES:

1- Reverse Recovery Test Conditions: $I_F=.5A$, $I_R=1A$, $I_{RR}=.25A$.

R2500F THRU R5000F

HIGH VOLTAGE FAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

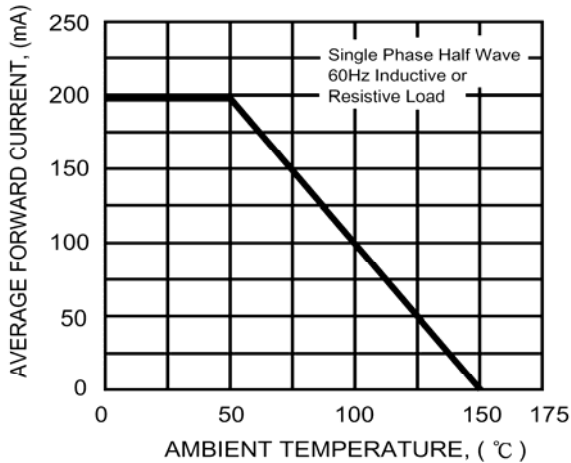


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


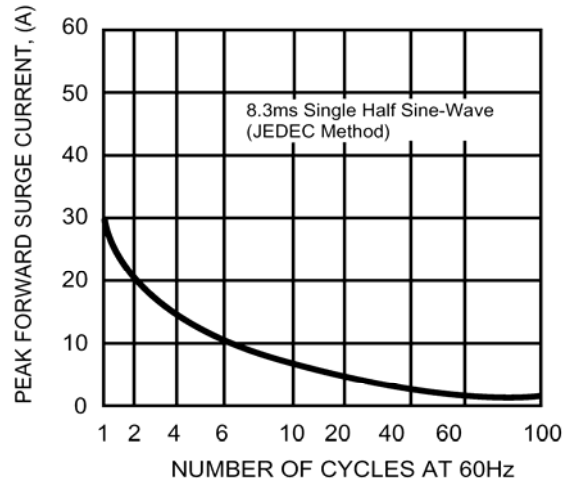


FIG. 3 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



- NOTES
1. Rise Time = 7ns max. Input Impedance = 1 megohm. 22 pF.
 2. Rise Time = 10ns max. Source Impedance = 50 ohms.

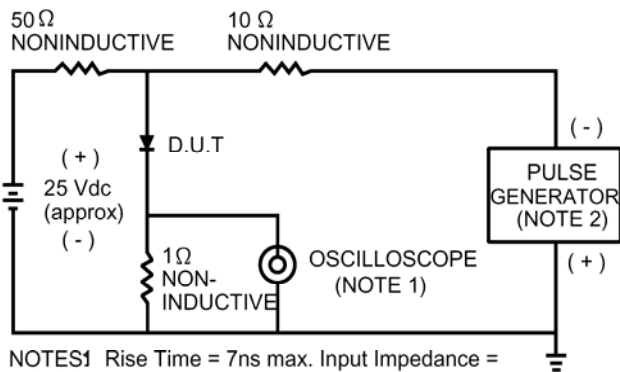