



1. Mechanical Dimensions:

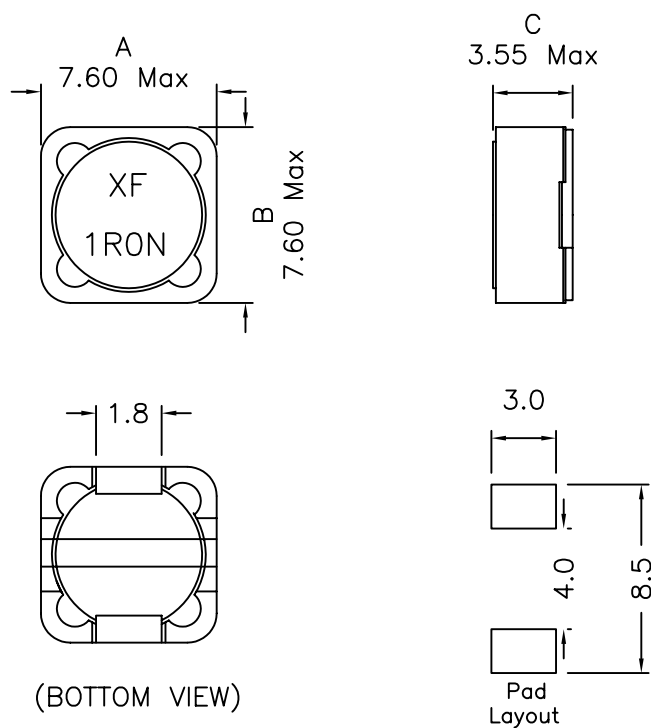

2. Schematic:



3. Electrical Specifications:@25C

OCL: 1.00uH $\pm 30\%$ @100KHz 0.25V

Q: 8 Min @100KHz 0.25V

I_{sat}: 8Adc (Based on 30% drop in OCL)

I_{rms}: 6.69A (Based on 40°C Temp Rise)

DC Res.: 0.015 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004"$ (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC REV: A/2

XFMRs Inc www.XFMRS.com		Title: SMD Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.30 Dimensions in MM	P/N: XFTPRH73-1R0N		REV A
	DWN.	Mei Chen	Sep-07-10
	CHK.	YK Liao	Sep-07-10
SHEET 1 OF 1	APP.	BW	Sep-07-10

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.