

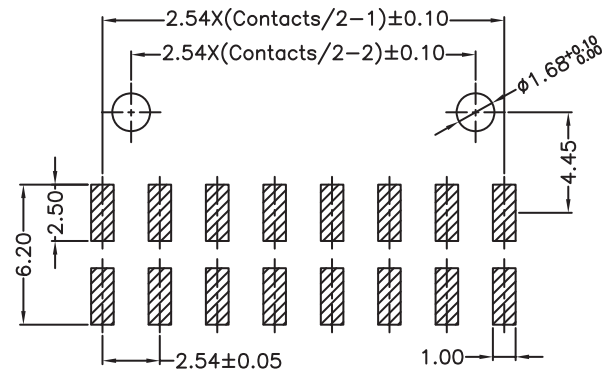
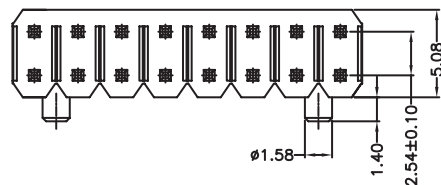
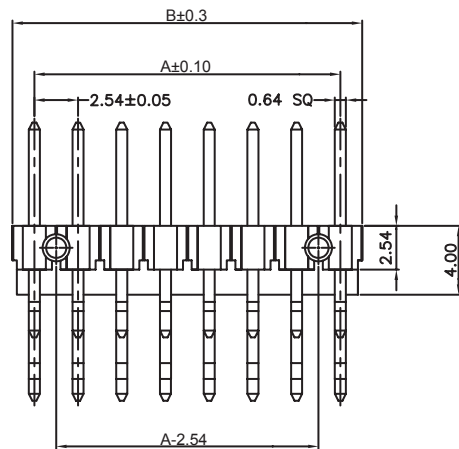




PCB LAYOUT - COMPONENT VIEW

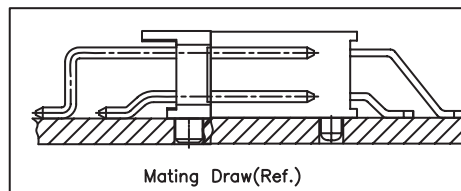

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 6T
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED CONTACT
PLATING: GOLD

ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 3A
WORKING VOLTAGE: 250V AC/DC
INSULATION RESISTANCE: >1000MΩ
WITHSTANDING VOLTAGE: 600 VAC/min
CONTACT RESISTANCE: 20 mΩ max

SOLDERING


JEDEC LEAD FREE REFLOW SOLDERING PROCESS

PACKAGING TAPE & REEL

DIMENSIONS
A = 2.54 x (NB. PINS/2-1)
B = 2.54 x (NB. PINS/2)

AVAILABLE IN:
6-8-10-12-14-16-20-22-24-26

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: WR-PHD - 2.54MM PIN HEADER - SMT TYPE DOUBLE ROW RIGHT ANGLE WERI PART NO: 610 1xx 249 121	SIZE A4
G								
F								
E								
D								
C				APPROVAL: GM	UNIT: MM			
B					SCALE:			
A	06-NOV-14	PDF	AS		SHEET: 1/3			
REV	DATE	FILE	BY		DRAW: AS			

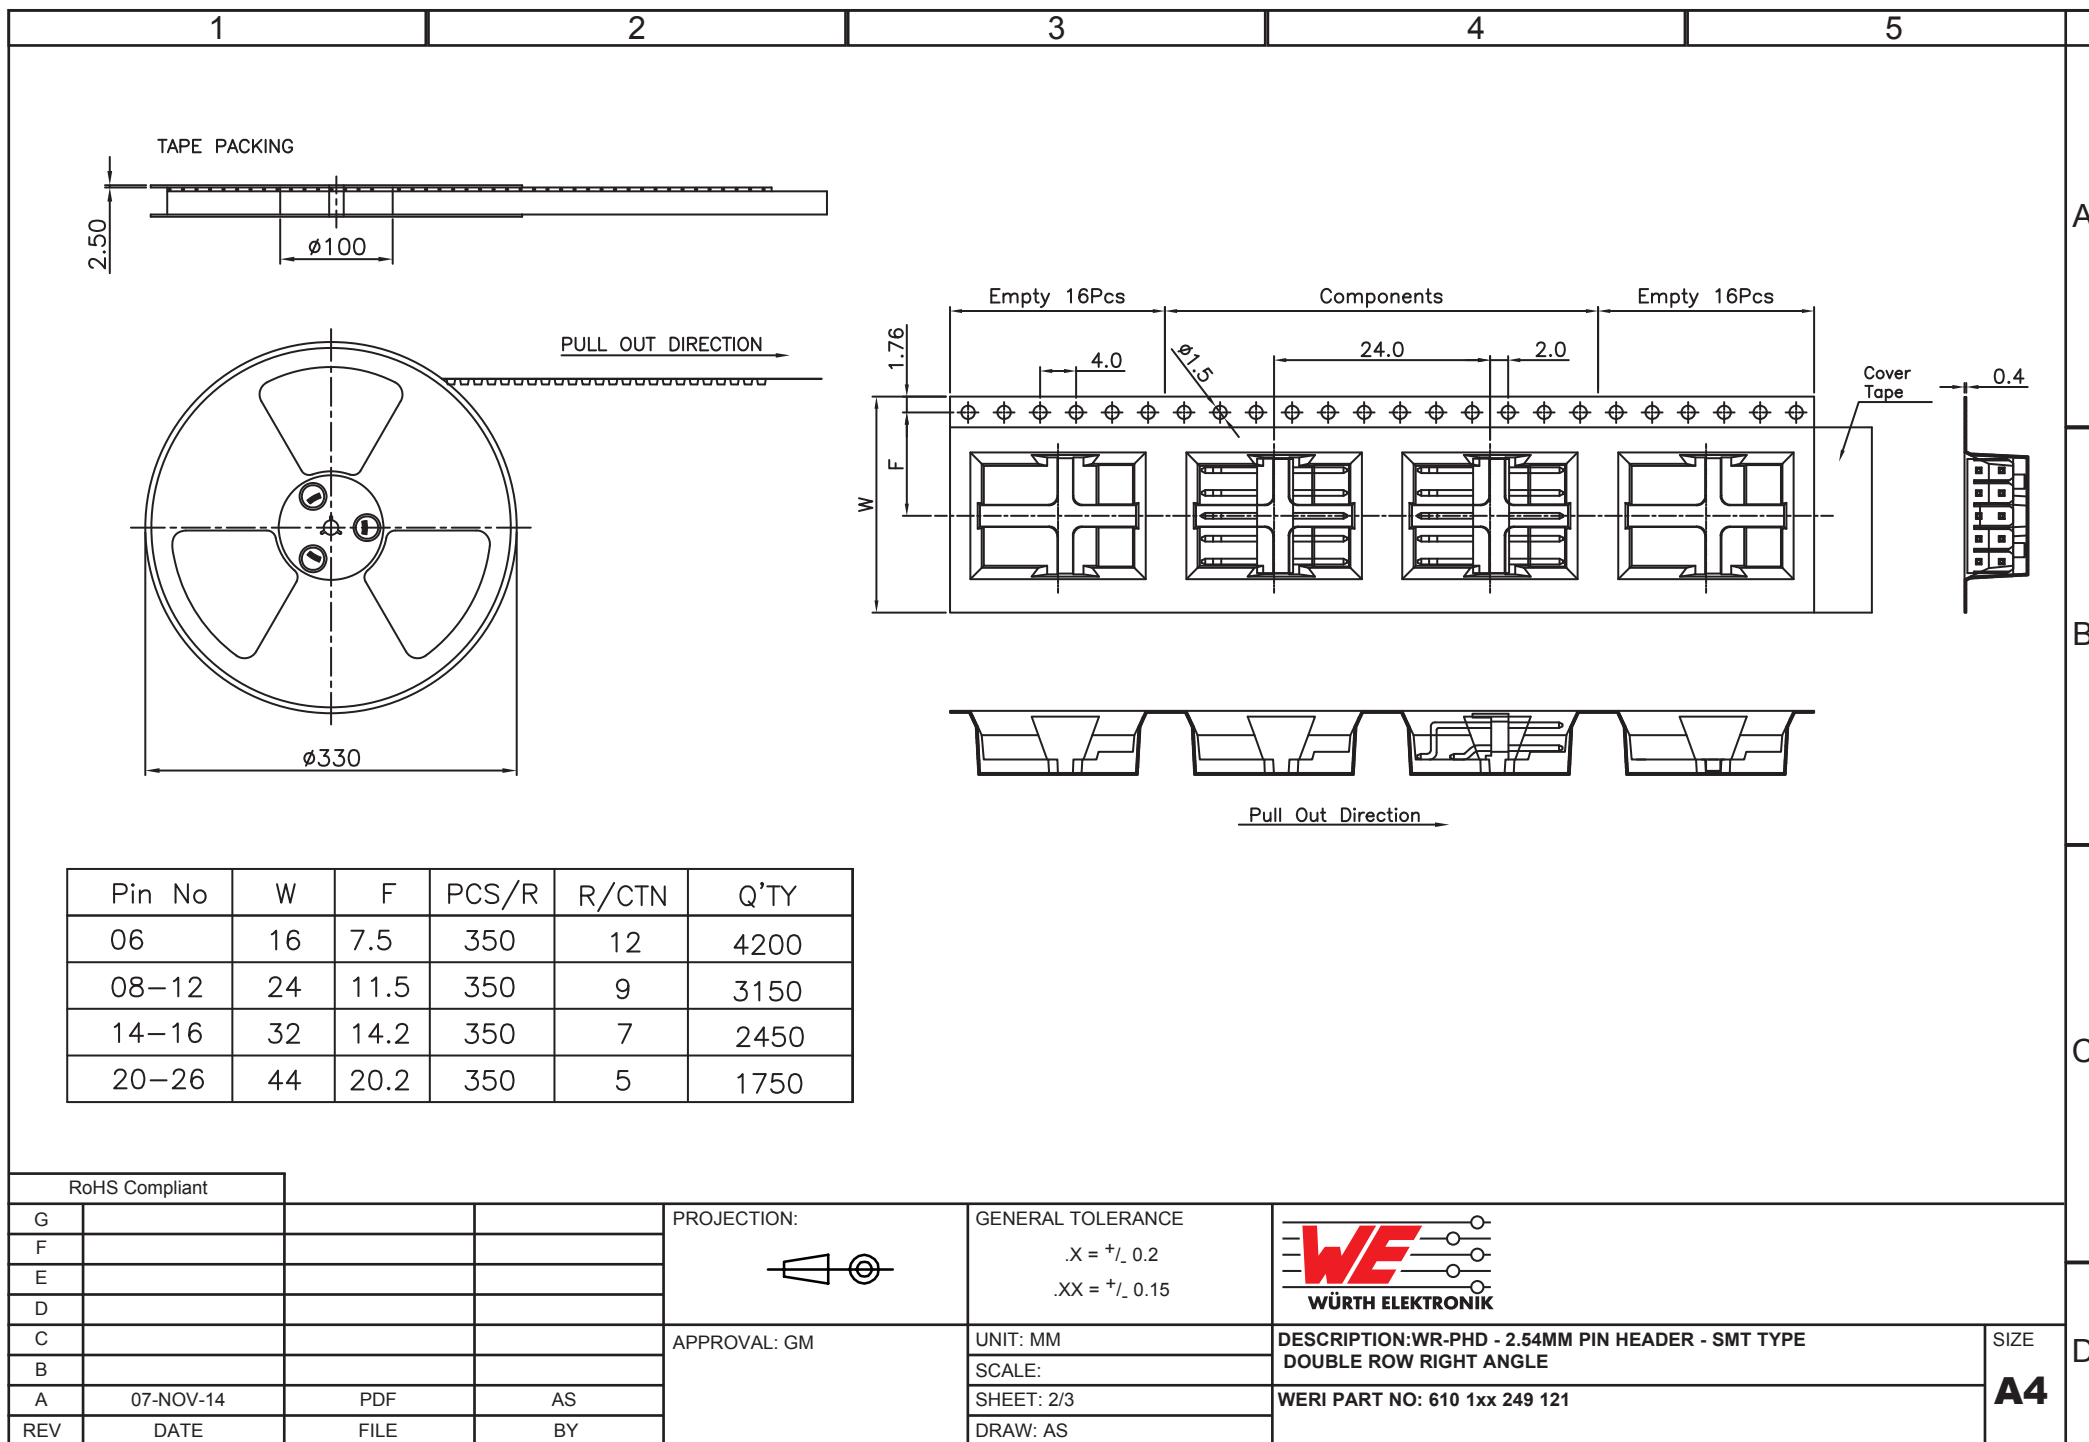

[illegible]