

# OA225 Series

225 x 80mm
(8.86" x 3.15")

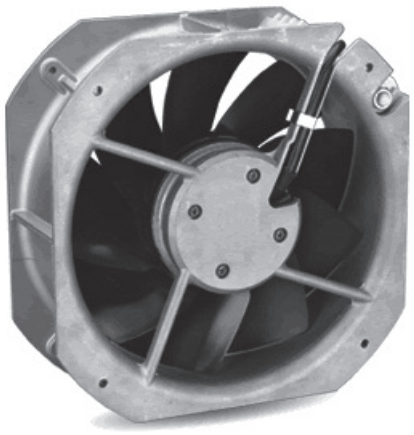

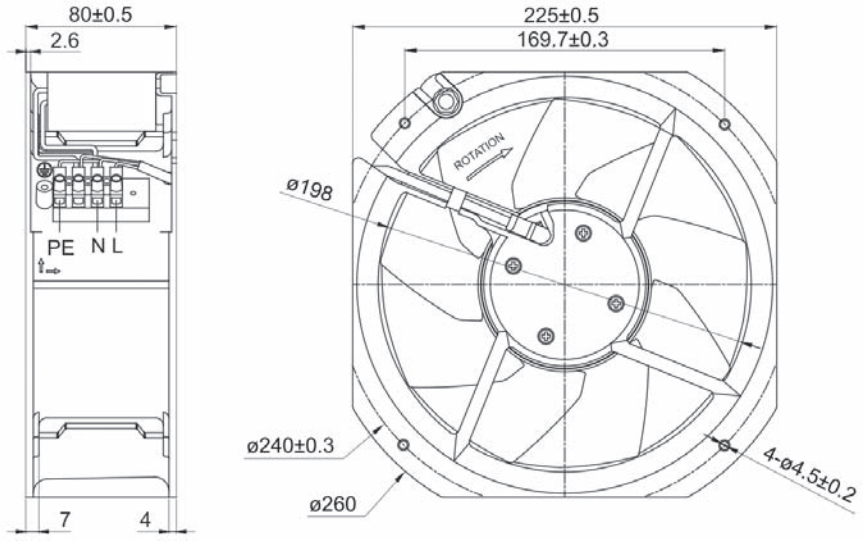



| | |
|---|---|
| Frame | Diecast Aluminum |
| Impeller | Metal |
| Connection | Terminal Block, 18AWG |
| Motor | Capacitor drive, thermally protected |
| Bearing System | Dual ball |
| Insulation | Class F |
| Dielectric Strength | 1 min at 1500 VAC, 50/60Hz |

Operating Temperature
Ball Bearing
-40C ~ +60C

Life Expectancy
Ball Bearing
40,000 hours (L10 at 40C)

m2

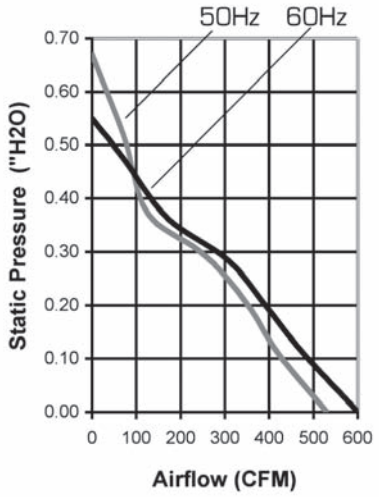


| Part Number | OA225AN-11-1TB18 | OA225AN-22-1TB18 |
|---|---|---|
| Nominal Voltage | 115VAC | 230VAC |
| Voltage Range | 100 ~ 125VAC | 200 ~ 240VAC |
| Rated Power | 65 / 72 W | 74 / 80 W |
| Nominal Current | 0.58 / 0.70 A | 0.29 / 0.35 A |
| Rated Speed (RPM) 50/60Hz | 2550 / 2800 | 2550 / 2800 |
| Airflow (CFM) 50/60Hz | 530 / 600 | 530 / 600 |
| Noise Level (dB) 50/60HZ | 59 / 61 | 59 / 61 |
| Max. Static Pressure 50/60Hz | 0.55" / 0.67" $H_2O$ | 0.55" / 0.67" $H_2O$ |