
Sensitive Gate Silicon Controlled Rectifiers


Symbol



Features

- Repetitive Peak Off-State Voltage : 600V
- R.M.S On-State Current ($I_{T(RMS)}$= 1.5 A)
- Low On-State Voltage (1.2V(Typ.)@I_{TM})

TO-92



General Description

Sensitive triggering SCR is suitable for the application where gate current limited such as small motor control, gate driver for large SCR, sensing and detecting circuits.

Absolute Maximum Ratings (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(AV)}$	Average On-State Current	Half Sine Wave : T_C = 45 °C	1.0	A
$I_{T(RMS)}$	R.M.S On-State Current	All Conduction Angle	1.5	A
I_{TSM}	Surge On-State Current	1/2 Cycle, 60Hz, Sine Wave Non-Repetitive	15	A
I^2t	I^2t for Fusing	t = 8.3ms	0.9	A^2s
P_{GM}	Forward Peak Gate Power Dissipation	T_A=25°C, Pulse Width ≤ 1.0μs	2	W
$P_{G(AV)}$	Forward Average Gate Power Dissipation	T_A=25°C, t = 8.3ms	0.1	W
I_{FGM}	Forward Peak Gate Current		1	A
V_{RGM}	Reverse Peak Gate Voltage		5.0	V
T_J	Operating Junction Temperature		- 40 ~ 125	°C
T_{STG}	Storage Temperature		- 40 ~ 150	°C

Copyright@SemiWell Semiconductor Co., Ltd., All rights are reserved.

Electrical Characteristics (T_C = 25 °C unless otherwise noted)

Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_{AK} = V_{DRM}$ or V_{RRM} ; R_{GK} = 1000 Ω T_C = 25 °C T_C = 125 °C	— —	— —	10 200	μA
V_{TM}	Peak On-State Voltage (1)	(I_{TM} =3 A, Peak)	—	1.2	1.7	V
I_{GT}	Gate Trigger Current (2)	V_{AK} = 6 V, R_L=100 Ω T_C = 25 °C T_C = - 40 °C	— —	— —	200 500	μA
V_{GT}	Gate Trigger Voltage (2)	V_D = 7 V, R_L=100 Ω T_C = 25 °C T_C = - 40 °C	— —	— —	0.8 1.2	V
V_{GD}	Non-Trigger Gate Voltage (1)	V_{AK} = 12 V, R_L=100 Ω T_C = 125 °C	0.2	—	—	V
dv/dt	Critical Rate of Rise Off-State Voltage	$V_{GM} = 0.67V_{DRM}$, Exponential waveform , R_{GK} = 1000 Ω T_J = 125 °C	200	—	—	V/μs
di/dt	Critical Rate of Rise On-State Current	I_{TM} = 3A, Ig = 10mA			50	A/μs
I_H	Holding Current	V_{AK} = 12 V, Gate Open T_C = 25 °C T_C = - 40 °C	— —	2 —	5.0 10	mA
$R_{th(j-c)}$	Thermal Impedance	Junction to case	—	—	50	°C/W
$R_{th(j-a)}$	Thermal Impedance	Junction to Ambient	—	—	160	°C/W

※ Notes :

1. Pulse Width ≤ 1.0 ms , Duty cycle ≤ 1%
2. Does not include R_{GK} in measurement.

Fig 1. Gate Characteristics

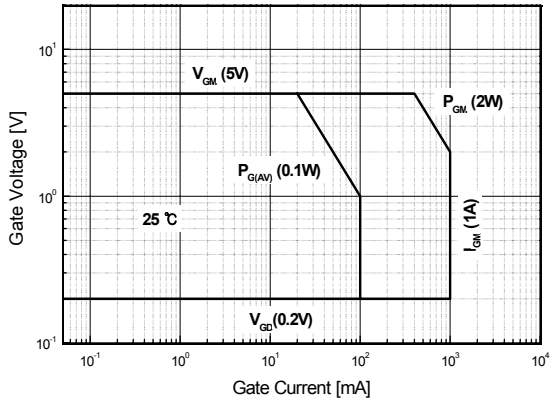


Fig 2. Maximum Case Temperature

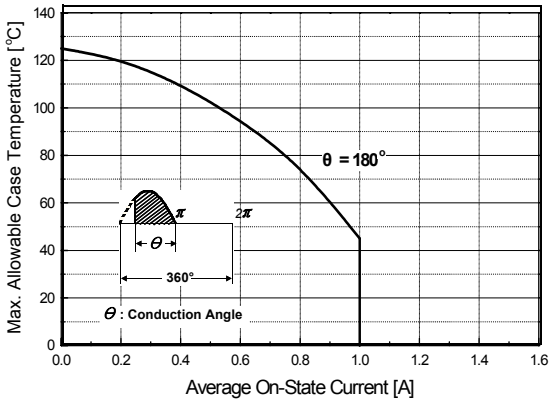


Fig 3. Typical Forward Voltage

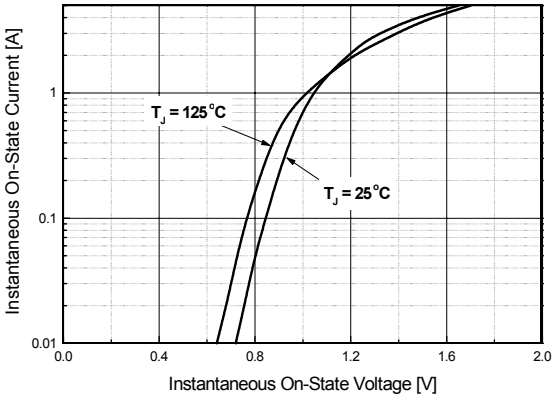


Fig 4. Thermal Response

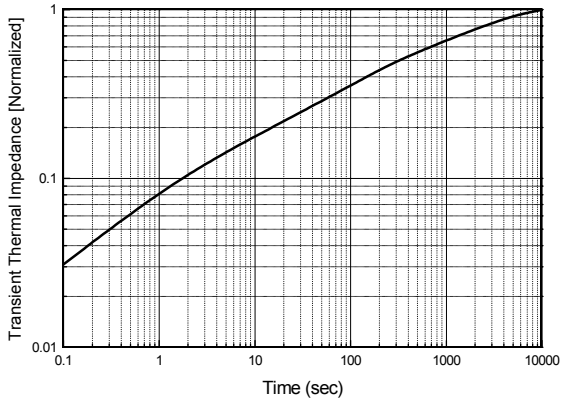


Fig 5. Typical Gate Trigger Voltage vs. Junction Temperature

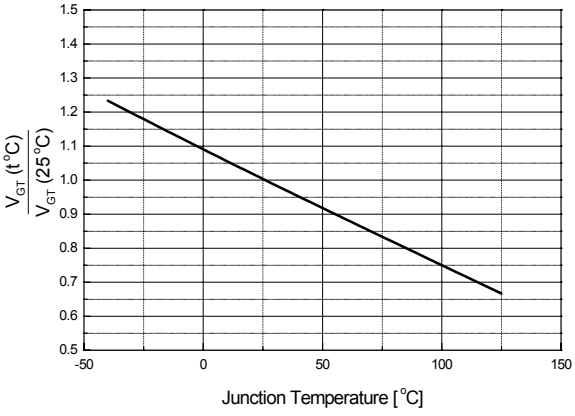


Fig 6. Typical Gate Trigger Current vs. Junction Temperature

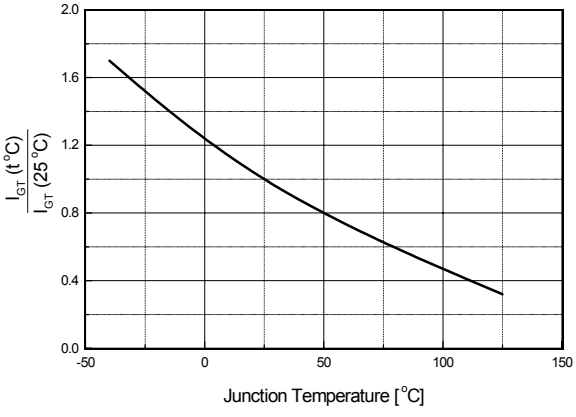


Fig 7. Typical Holding Current


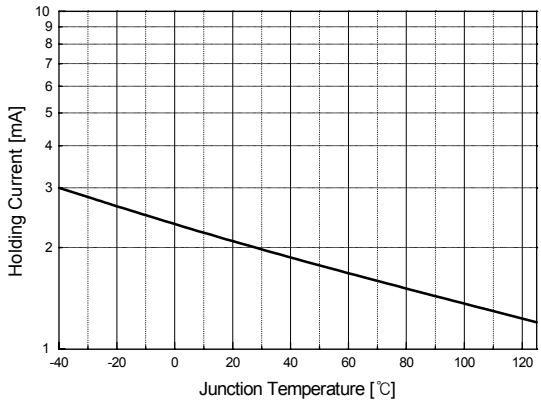


Fig 8. Power Dissipation



TO-92 Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		4.2			0.165	
B			3.7			0.146
C	4.43		4.83	0.174		0.190
D	14.07		14.87	0.554		0.585
E			0.4			0.016
F	4.43		4.83	0.174		0.190
G			0.45			0.017
H		2.54			0.100	
I		2.54			0.100	
J	0.33		0.48	0.013		0.019

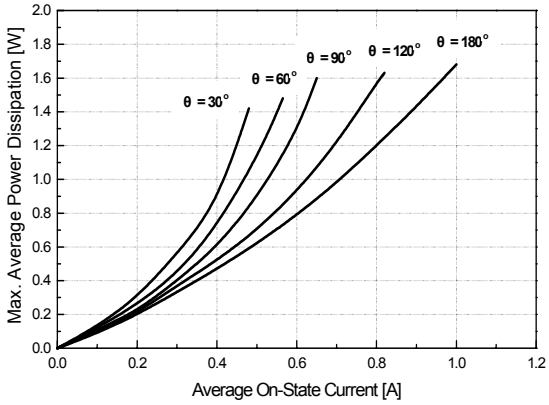