

HD3SS460 4 x 6 Channels USB Type-C™ Alternate Mode MUX

1 Features

- Provides MUX Solution for USB Type-C™ Ecosystem Including Alternate Mode (AM)
- Provides Wide Channel Selection Choices Including USBSS and 2 Ch AM, 4 Ch AM
- Compatible with 5 Gbps USB3.1 Gen 1 and AM Including 5.4 Gbps DisplayPort 1.2a
- Compatible for Source/Host and Sink/Device Applications
- Provides Cross-point MUX for Low Speed SBU Pins
- Bidirectional "Mux/De-Mux" Differential Switch
- Supports Common Mode Voltage 0-2V
- Low Power with 1-μA Shutdown and 0.6 mA Active
- Single Supply Voltage VCC of 3.3V ±10%
- Industrial Temperature Range of –40 to 85°C

2 Applications

- Flippable USB Type-C™ Ecosystem
- Tablets, Laptops, Monitors, Phones
- USB Host and Devices
- Docking Stations

3 Description

The HD3SS460 is a high-speed bi-directional passive switch in mux or demux configurations. Based on control pin POL the device provides switching to accommodate connector flipping. The device also provides muxing between 2Ch Data / 2Ch Video and all 4Ch Video based on control pin AMSEL.

The device also provides cross points MUX for low speed pins as needed in flippable connector implementation.

The HD3SS460 is a generic analog differential passive switch that can work for any high speed interface applications as long as it is biased at a common mode voltage range of 0-2V and has differential signaling with differential amplitude up to 1800mVpp. It employs an adaptive tracking that ensures the channel remains unchanged for entire common mode voltage range.

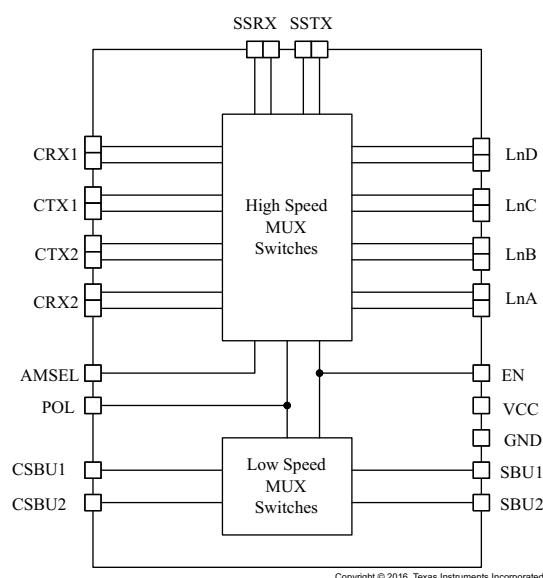
Excellent dynamic characteristics of the device allow high speed switching with minimum attenuation to the signal eye diagram with very little added jitter. It consumes <2 mW of power when operational and <5μW in shutdown mode, exercisable by EN pin.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|----------|-------------------|
| HD3SS460 | QFN (28) | 3.50 mm × 5.50 mm |
| HD3SS460I | | |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Simplified Schematic



Application

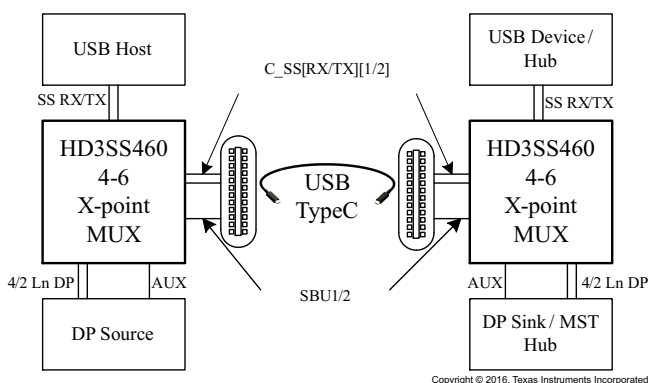


Table of Contents

| | | | |
|---------------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| 1 Features | 1 | 8.3 Feature Description | 10 |
| 2 Applications | 1 | 8.4 Device Functional Modes | 10 |
| 3 Description | 1 | 9 Application and Implementation | 13 |
| 4 Revision History | 2 | 9.1 Application Information | 13 |
| 5 Device Comparison Table | 3 | 9.2 USB SS and DP as Alternate Mode | 13 |
| 6 Pin Configuration and Functions | 4 | 10 Power Supply Recommendations | 22 |
| 7 Specifications | 5 | 11 Layout | 23 |
| 7.1 Absolute Maximum Ratings | 5 | 11.1 Layout Guidelines | 23 |
| 7.2 ESD Ratings | 5 | 11.2 Layout Example | 24 |
| 7.3 Recommended Operating Conditions | 5 | 12 Device and Documentation Support | 26 |
| 7.4 Thermal Information | 5 | 12.1 Receiving Notification of Documentation Updates | 26 |
| 7.5 Electrical Characteristics | 6 | 12.2 Community Resources | 26 |
| 7.6 High Speed Port Performance Parameters | 6 | 12.3 Trademarks | 26 |
| 7.7 High Speed Signal Path Switching Characteristics .. | 7 | 12.4 Electrostatic Discharge Caution | 26 |
| 8 Detailed Description | 9 | 12.5 Glossary | 26 |
| 8.1 Overview | 9 | 13 Mechanical, Packaging, and Orderable Information | 26 |
| 8.2 Functional Block Diagram | 9 | | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision A (March 2015) to Revision B | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Changed text and Figure 3 , Figure 4 in the USB SS and DP as Alternate Mode section for clarity. | 13 |
| • Added Figure 5 | 14 |
| • Added Figure 6 | 15 |
| • Deleted Table <i>Pin Assignments for DP Source Pins and DP Sink Pins</i> in the Detailed Design Procedure section | 16 |
| • Added Table 2 , Table 3 , Table 4 , and Table 5 | 16 |
| • Added Figure 8 through Figure 13 | 16 |
| • Changed Figure 16 | 20 |
| • Changed image for Figure 19 | 22 |


| Changes from Original (January 2015) to Revision A | Page |
|-----------------------------------------------------------|-------------|
| • Added full data sheet specification complement | 5 |

5 Device Comparison Table⁽¹⁾

| OPERATING TEMPERATURE (°C) | PART NUMBER | PINS | TOP-SIDE MARKING |
|----------------------------|-------------|------|------------------|
| 0 to 70 | HD3SS460 | 28 | 3SS460 |
| –40 to 85 | HD3SS460I | 28 | 3SS460I |

- (1) For all available packages, see the orderable addendum at the end of the data sheet. Package drawings, thermal data, and symbolization are available at www.ti.com/packaging

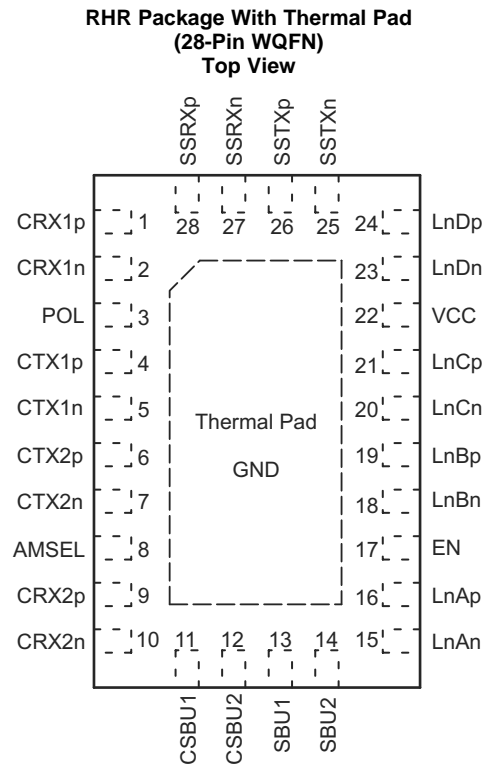6 Pin Configuration and Functions



Pin Functions

| PIN | | TYPE ⁽¹⁾ | DESCRIPTION |
|----------|--------|---------------------|----------------------------------------------------|
| NAME | NO. | | |
| VCC | 22 | P | Power |
| GND | PAD | G | Ground |
| POL | 3 | Input | Provides MUX control (Table 1) |
| AMSEL | 8 | 3-Level Input | Provides MUX configurations (Table 1) |
| EN | 17 | 3-Level Input | Enable signal; also provides MUX control (Table 1) |
| CRX1p, n | 1, 2 | I/O | High Speed Signal Port CRX1 positive, negative |
| CTX1p, n | 4, 5 | I/O | High Speed Signal Port CTX1 positive, negative |
| CTX2p, n | 6, 7 | I/O | High Speed Signal Port CTX2 positive, negative |
| CRX2p, n | 9, 10 | I/O | High Speed Signal Port CRX2 positive, negative |
| LnAn, p | 15, 16 | I/O | High Speed Signal Port LnA positive, negative |
| LnBn, p | 18, 19 | I/O | High Speed Signal Port LnB positive, negative |
| LnCn, p | 20, 21 | I/O | High Speed Signal Port LnC positive, negative |
| LnDn, p | 23, 24 | I/O | High Speed Signal Port LnD positive, negative |
| SSTXn, p | 25, 26 | I/O | High Speed Signal Port SSTX positive, negative |
| SSRXn, p | 27, 28 | I/O | High Speed Signal Port SSRX positive, negative |
| CSBU1, 2 | 11, 12 | I/O | Low Speed Signal Port CSBU 1, 2 |
| SBU1, 2 | 13, 14 | I/O | Low Speed Signal Port SBU 1, 2 |

(1) High speed data ports (CRX[1/2][p/n], Ln[A-D][p,n], and SS[T/R]X[p/n]) incorporate 20kΩ pull down resistors that are switched in when a port is not selected and switched out when the port is selected.

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

| | MIN | MAX | UNIT |
|--------------------------------------------------------------------------------------|------|-----|------|
| Supply Voltage, VCC | –0.5 | 4 | V |
| Differential High Speed I/O Voltages, C[R/T]X[1/2][p/n], Ln[A-D][p/n], SS[R/T]X[p/n] | –0.5 | 2.5 | V |
| Low Speed I/O Voltages, CSBU[1/2], SBU[1/2] | –0.5 | 4 | V |
| Control signal voltages, POL, AMSEL, EN | –0.5 | 4 | V |
| Storage temperature, T _{stg} | –65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------------------------------|--------------------------------------------------------------------------------|-------|------|
| V _(ESD) Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±4000 | V |
| | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1000 | V |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|-------------------|--------------------------------------|-----------|-----|-----|-----------------|
| VCC | Supply voltage | 3.0 | 3.3 | 3.6 | V |
| T _A | Operating free air temperature | HD3SS460 | 0 | 25 | °C |
| | | HD3SS460I | –40 | 25 | |
| V _{cm} | High speed port common mode voltage | 0 | | 2 | V |
| V _{in} | Low Speed signal voltage | 0 | | VCC | |
| V _{diff} | High speed port differential voltage | 0 | | 1.8 | V _{pp} |

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | HD3SS460 | UNIT |
|-------------------------------|----------------------------------------------|-----------|------|
| | | QFN (RGR) | |
| | | 28 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 44.0 | °C/W |
| R _{θJC(top)} | Junction-to-case (top) thermal resistance | 34.8 | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | 14.7 | °C/W |
| Ψ _{JT} | Junction-to-top characterization parameter | 0.7 | °C/W |
| Ψ _{JB} | Junction-to-board characterization parameter | 24.5 | °C/W |
| R _{θJC(bot)} | Junction-to-case (bottom) thermal resistance | 6.9 | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

HD3SS460

SLLSEM7B – JANUARY 2015 – REVISED JUNE 2016

www.ti.com

7.5 Electrical Characteristics

typical values for all parameters are at VDD = 3.3 V and TA = 25°C (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------|--------------------------|------|
| V _{IL} | Input low voltage, control pins POL, AMSEL, EN | | –0.1 | | 0.4 | V |
| V _{IH} | Input high voltage, control pins POL, AMSEL, EN | | V _{CC} – 0.4 | | V _{CC} + 0.1 | |
| V _{IM} | Input mid-level voltage, control pins AMSEL, EN | | V _{CC} /2 – 0.3 | V _{CC} /2 | V _{CC} /2 + 0.3 | |
| I _{LK-DIFF-ACTIVE} | Leakage current on active differential IO pins, VCC=3.6V, pin at 0 or 2.4V. | | | | 1 | μA |
| I _{LK-DIFF-INACTIVE} | Leakage current on inactive differential IO pins, VCC=3.6V, pin at 2.4V. | | | | 150 | |
| I _{IH} | Input high current, control pins POL, AMSEL, EN and signal pins CSBU1/2, SBU1/2 | | | | 1 | |
| I _{IL} | Input low current, control pins POL, AMSEL, EN and signal pins CSBU1/2, SBU1/2 | | | | 1 | |
| I _{IM} | Input mid-level current, control pins AMSEL, EN | | | | 1 | |
| I _{OFF} | Device shutdown current | | | 1 | 5 | mA |
| I _{DD} | Device active current, EN=H or M | | | 0.6 | 0.9 | |
| R _{ON(HS)} | Switch ON resistance for high speed differential signals | V _{CC} = 3.3 V, V _{CM} = 0-2 V, I _O = – 8 mA | | 8 | 14 | Ω |
| R _{ON(LS)} | Switch ON resistance for low speed signals | V _{CC} = 3.3 V, V _{CM} = 0-2 V, I _O = – 8 mA | | 12 | | |
| R _{FLAT(ON,HS)} | High speed differential signals' ON resistance flatness for a channel | (R _{ON(MAX)} – R _{ON(MIN)}) over V _{CM} range V _{CC} = 3.3 V, V _{CM} = 0-2 V, I _O = – 8 mA | | | 1.5 | |
| C _{ON(HS)} | High speed differential signals' input capacitance | | | | 1 | pF |

7.6 High Speed Port Performance Parameters

under recommended operating conditions; R_{LOAD}, R_{SC} = 50 Ω (unless otherwise noted)

| PARAMETER | | | MIN | TYP | MAX | UNIT |
|-----------|-----------------------------------------------------------------|------------------|-----|------|-----|------|
| RL | Differential return loss | 100 Mhz SS Paths | | –23 | | dB |
| | | 2.5 Ghz SS Paths | | –9 | | |
| | | 100 MHz AM Paths | | –23 | | |
| | | 2.7GHz AM Paths | | –13 | | |
| IL | Differential insertion loss | 100 Mhz SS Paths | | –0.7 | | |
| | | 2.5 Ghz SS Paths | | –1.6 | | |
| | | 100 MHz AM Paths | | –0.7 | | |
| | | 2.7 GHz AM Paths | | –1.4 | | |
| OI | Differential off isolation | 100 Mhz | | –50 | | |
| | | 2.5 Ghz | | –26 | | |
| | | 2.7 GHz | | –25 | | |
| Xtalk | Differential cross talk, Between CRX1/2 and CTX1/2 | 100 Mhz | | –80 | | |
| | | 2.5 Ghz | | –30 | | |
| | | 2.7 Ghz | | –28 | | |
| | Differential cross talk, Between CRX1 and CRX2 or CTX1 and CTX2 | 100 Mhz | | –50 | | |
| | | 2.5 Ghz | | –26 | | |
| | | 2.7 Ghz | | –25 | | |

High Speed Port Performance Parameters (continued)

under recommended operating conditions; R_{LOAD} , $R_{SC} = 50\ \Omega$ (unless otherwise noted)

| PARAMETER | | | MIN | TYP | MAX | UNIT |
|------------|--------------------------------|--|-----|-----|-----|------|
| BW_{SS} | Differential –3 dB BW SS Paths | | | 4.2 | | GHz |
| BW_{AM} | Differential –3 dB BW AM Paths | | | 5.4 | | |
| BW_{SBU} | Low-speed switch –3 dB BW | | | 500 | | MHz |

7.7 High Speed Signal Path Switching Characteristics

| PARAMETER | | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---------------|-------------------------------------------------------------------|-----------------------------------------------------------------|-----|-----|-----|---------|
| t_{PD} | Switch propagation delay | R_{SC} and $R_{LOAD} = 50\ \Omega$, Figure 2 | | | 100 | ps |
| $t_{SK(O)}$ | Inter-Pair output skew (CH-CH) | | | | 50 | |
| $t_{SK(b-b)}$ | Intra-Pair output skew (bit-bit) | | | | 5 | |
| t_{ON} | Control signals POL, AMSEL and EN (H/M toggle) to switch ON time | R_{SC} and $R_{LOAD} = 50\ \Omega$, Figure 1 | | | 3 | μs |
| t_{OFF} | Control signals POL, AMSEL and EN (H/M toggle) to switch OFF time | | | | 1 | |

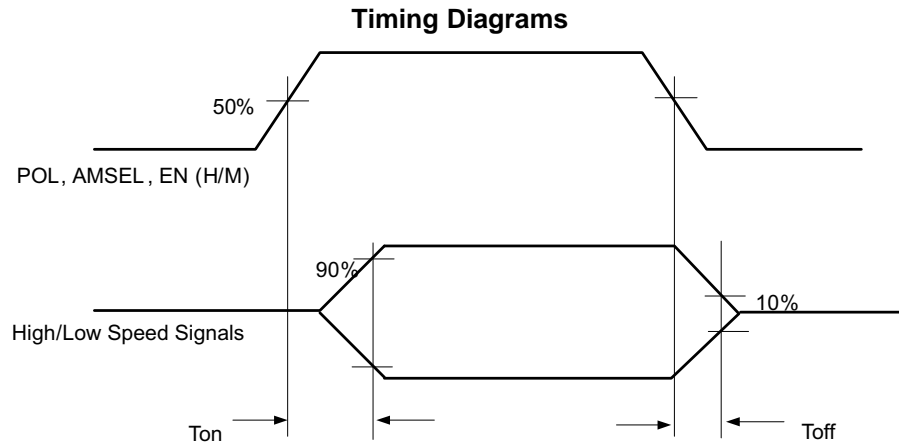


Figure 1. Switch ON/OFF Time

HD3SS460

SLLSEM7B – JANUARY 2015 – REVISED JUNE 2016

www.ti.com

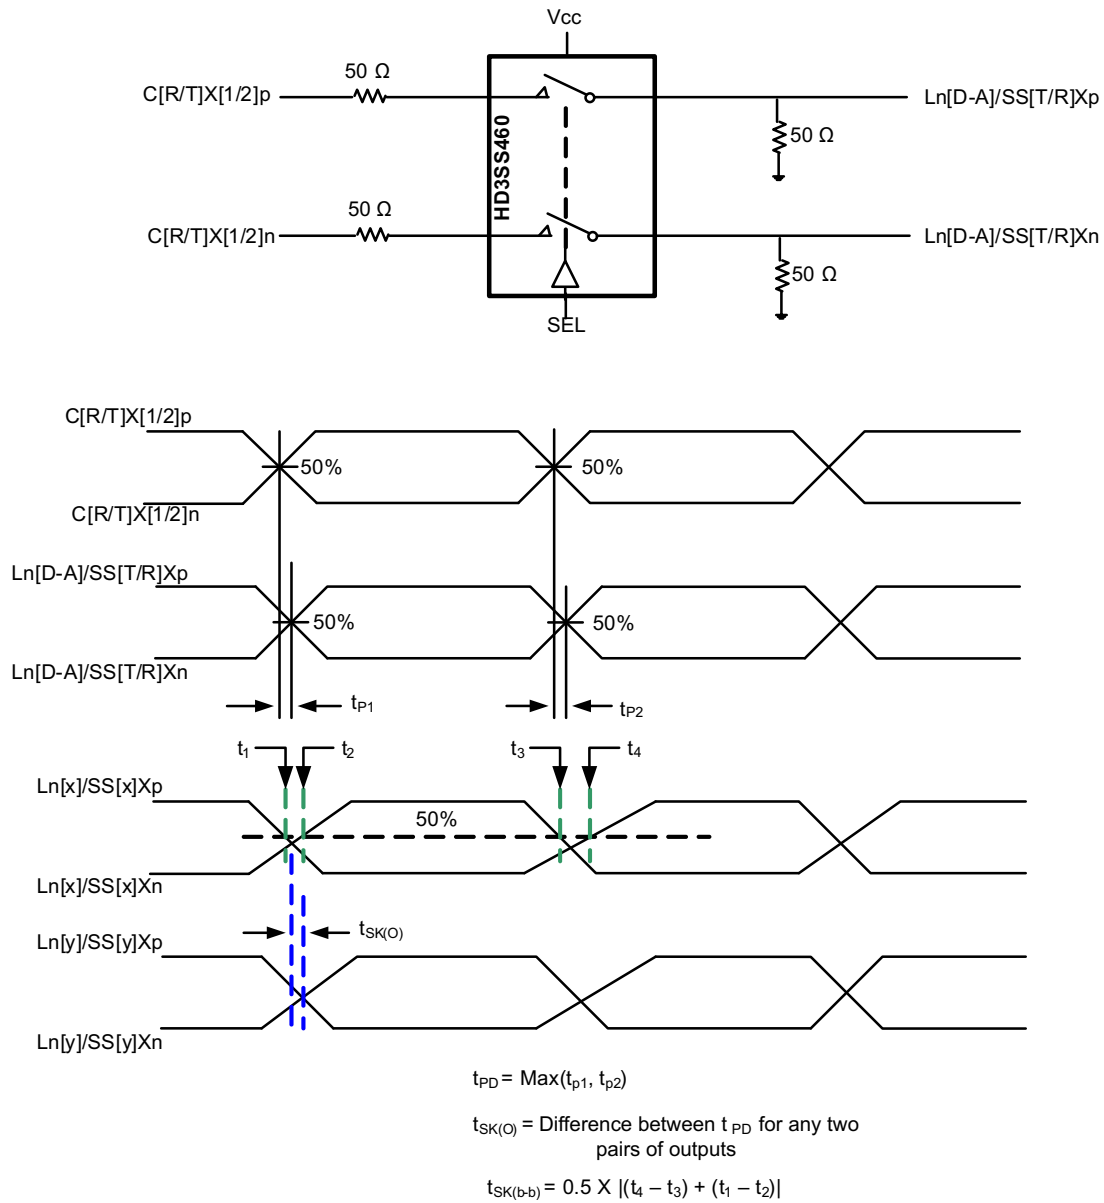


Figure 2. Propagation Delay and Skew

8 Detailed Description

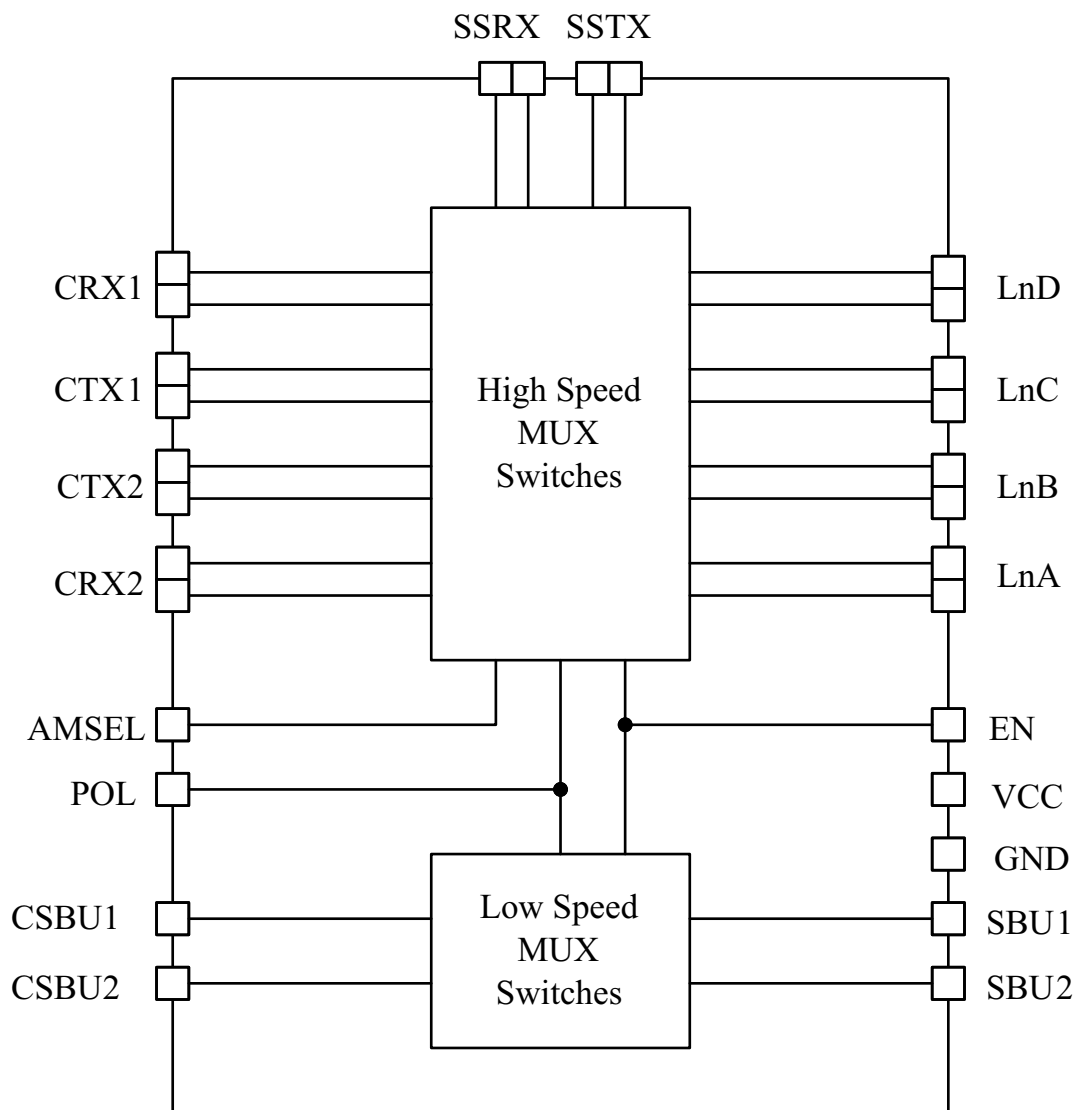
8.1 Overview

The HD3SS460 is a high-speed bi-directional passive 4-6 cross-point switch in mux or demux configurations. Based on control pin POL the device provides switching to accommodate USB Type-C plug flipping. The device provides multiple signal switching options that allow system implementation flexibility.

The HD3SS460 is a generic analog, differential passive switch that can work for any high speed interface applications as long as it is biased at a common mode voltage range of 0-2 V and has differential signaling with differential amplitude up to 1800 mVpp. It employs an adaptive tracking that ensures the channel remains unchanged for entire common mode voltage range

Excellent dynamic characteristics of the device allow high speed switching with minimum attenuation to the signal eye diagram with very little added jitter.

8.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 High Speed Differential Signal Switching

Based on control pin AMSEL the device provides muxing options of:

1. 1 port (RX and TX) USB3.1 SS data / 2Ch video (or any other Alternate Mode data)
2. All 4Ch video (or any other Alternate Mode data)
3. 1 port (RX and TX) USB3.1 SS data
4. 1 port (RX and TX) USB3.1 SS data / 2Ch video (or any other Alternate Mode data) with option of choosing video from two different source/sink
5. 1 port (RX and TX) USB3.1 SS data / 2Ch video (or any other Alternate Mode data) with option of choosing video 2 Ln Video or 1 Ln Video from two different source/sink

8.3.2 Low Speed SBU Signal Switching

The device also provides cross point muxing for low speed SBU signals as needed in USB Type-C flippable connector implementation. The device provides the option to choose the USB only implementation where SBU ports are in tri-state.

8.3.3 Output Enable and Power Savings





The HD3SS460 has two power modes, active/normal operating mode and standby/shutdown mode. During standby mode, the device consumes very little current to save the maximum power. To enter standby mode, the EN control pin is pulled low and must remain low. For active/normal operation, the EN control pin should be pulled high to VDD through a resistor or dynamically controlled to switch between H or M.

HD3SS460 consumes <2 mW of power when operational and <5 μ W in shutdown mode, exercisable by the EN pin.

8.4 Device Functional Modes

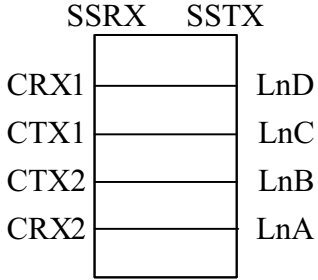

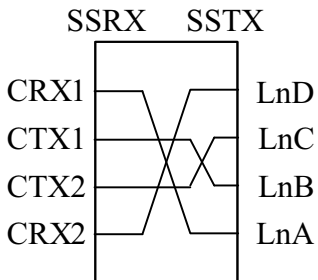

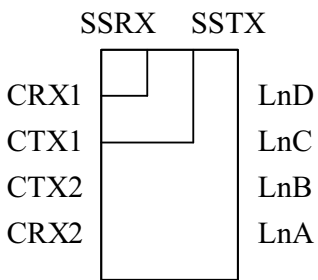
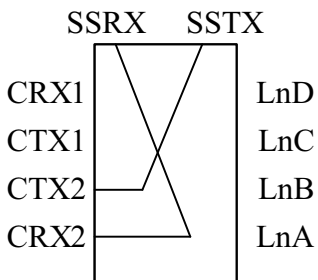
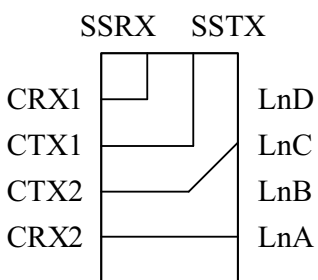

8.4.1 Device High Speed Switch Control Modes

Table 1. MUX Control for High Speed and Low Speed SBU Channels







| POL | AMSEL | EN | CONFIGURATIONS | HIGH SPEED SIGNAL FLOW ⁽¹⁾ | SBU SIGNAL FLOW |
|-----|-------|----|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| L | L | H | 2CH USBSS + 2CH AM (Normal) | <div> <div>SSRX</div> <div>  </div> <div>SSTX</div> </div> | <div> <div>CSBU1</div> <div>  </div> <div>CSBU2</div> </div> |
| H | L | H | 2CH USBSS + 2CH AM (Flipped) | <div> <div>SSRX</div> <div>  </div> <div>SSTX</div> </div> | <div> <div>CSBU1</div> <div>  </div> <div>CSBU2</div> </div> |

(1) All positive signals connect to positive and negative to negative

Device Functional Modes (continued)
Table 1. MUX Control for High Speed and Low Speed SBU Channels (continued)

| POL | AMSEL | EN | CONFIGURATIONS | HIGH SPEED SIGNAL FLOW ⁽¹⁾ | SBU SIGNAL FLOW |
|-----|-------|----|-----------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| L | H | H | 4CH AM (Normal) |  |  |
| H | H | H | 4CH AM (Flipped) |  |  |
| L | M | H | 2CH USBSS (Normal) |  | All Low Speed SBU Ports HighZ |
| H | M | H | 2CH USBSS (Flipped) |  | All Low Speed SBU Ports HighZ |
| L | M | M | 2CH USBSS + 2CH AM (Normal) |  |  |

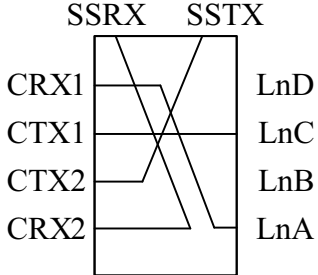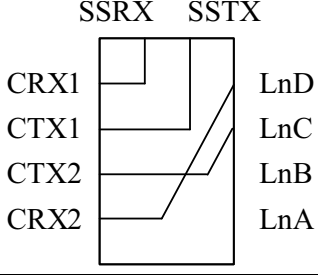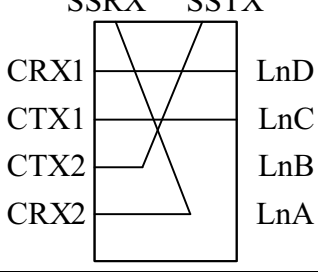Device Functional Modes (continued)
Table 1. MUX Control for High Speed and Low Speed SBU Channels (continued)

| POL | AMSEL | EN | CONFIGURATIONS | HIGH SPEED SIGNAL FLOW ⁽¹⁾ | SBU SIGNAL FLOW |
|-----|-------|----|-------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| H | M | M | 2CH USBSS + 2CH AM (Flipped) |  |  |
| L | L | M | 2CH USBSS + 2CH AM from alternate GPU (Normal) |  |  |
| H | L | M | 2CH USBSS + 2CH AM from alternate GPU (Flipped) |  |  |
| L | H | M | Reserved | Reserved | Reserved |
| H | H | M | Reserved | Reserved | Reserved |
| X | X | L | All High Speed Ports HighZ | All High Speed Ports HighZ | All Low Speed SBU Ports HighZ |

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

HD3SS460 can be utilized for a wide range of muxing needs. This is general purpose passive cross-point switch. The channels have independent adaptive common mode tracking allowing flexibility. As long as recommended electrical use conditions are met the device can be used number of ways as described in [Table 1](#).


NOTE

HD3SS460 does not provide common mode biasing for the channel. Therefore it is required that the device is biased from either side for all active channels.

9.2 USB SS and DP as Alternate Mode

HD3SS460 can be used USB Type-C ecosystem with DP as alternate mode in two distinct application configurations – one is for DP Source/USB Host, the other one for the DP Sink/USB Device/Dock. [Figure 3](#) and [Figure 4](#) illustrate typical application block diagrams for these two cases. Detail schematics are illustrated in [Detailed Design Procedure](#) section. Other applications and or use cases possible where these examples can be used as general guidelines.

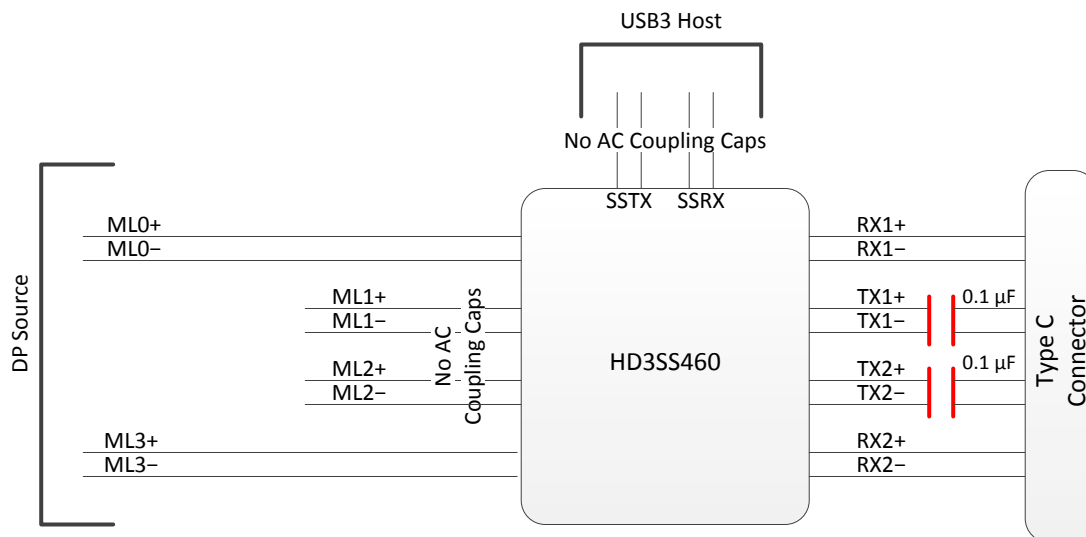[Figure 3](#) and [Figure 4](#) depict the AC coupling capacitor placement examples. TI recommends placing the capacitors as shown in the illustrations for the backward compatibility and interoperability purposes as some of the existing USB systems may present Vcm, exceeding the typical range of 0–2 V on SS differential pairs.



Copyright © 2016, Texas Instruments Incorporated

Figure 3. Block Diagram for a Type C Interface Using DP as Alternate Mode – Source/Host

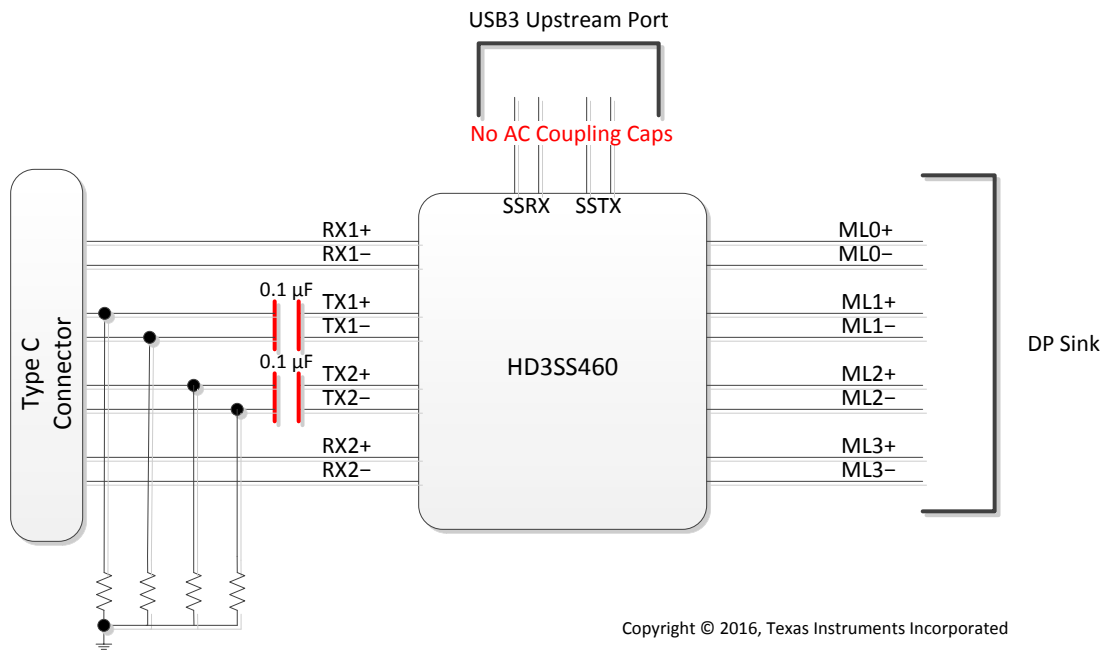
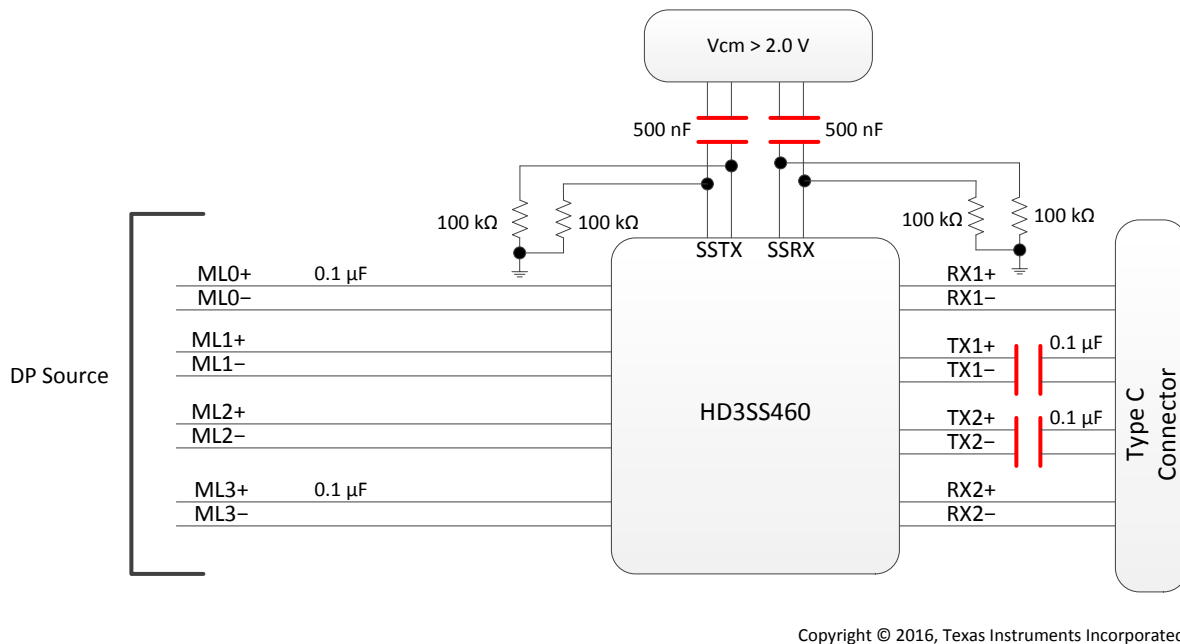
USB SS and DP as Alternate Mode (continued)

Figure 4. Diagram for a Type C Interface Using DP as Alternate Mode – Sink/Device/Dock

Figure 5 and Figure 6 depict the AC coupling capacitor recommendations in case the upstream or downstream port connected internally to the HD3SS460 presents V_{cm} greater than 2 V.


Figure 5. HD3SS460 USB Host (DP Source with SS USB V_{cm})

USB SS and DP as Alternate Mode (continued)

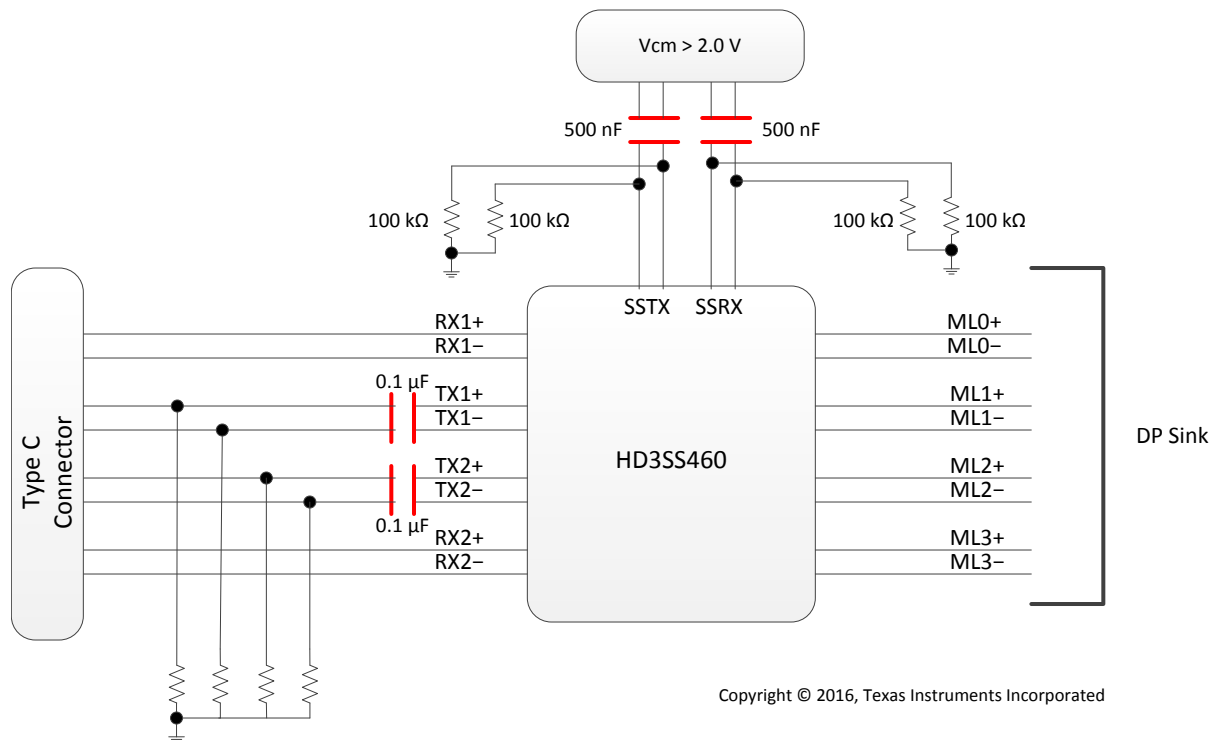


Figure 6. HD3SS460 USB Upstream (DP Sink Implementation Example)

9.2.1 Design Requirements

| DESIGN PARAMETERS | EXAMPLE VALUES |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| VCC | 3.3 V |
| Decoupling capacitors | 0.1 µF |
| AC Capacitors | 75-200nF (100nF shown) USBSS TX p and n lines require AC capacotprs. Alternate mode signals may or may not require AC capacitors |
| Control pins | Controls pins can be dynamically controlled or pin-strapped. The POL signal is controlled by CC logic in the Type-C ecosystem. |

9.2.2 Detailed Design Procedure

The reference schematics shown in this document are based upon the pin assignment defined in the Alternate mode over Type C specification as shown in [Figure 7](#) below.

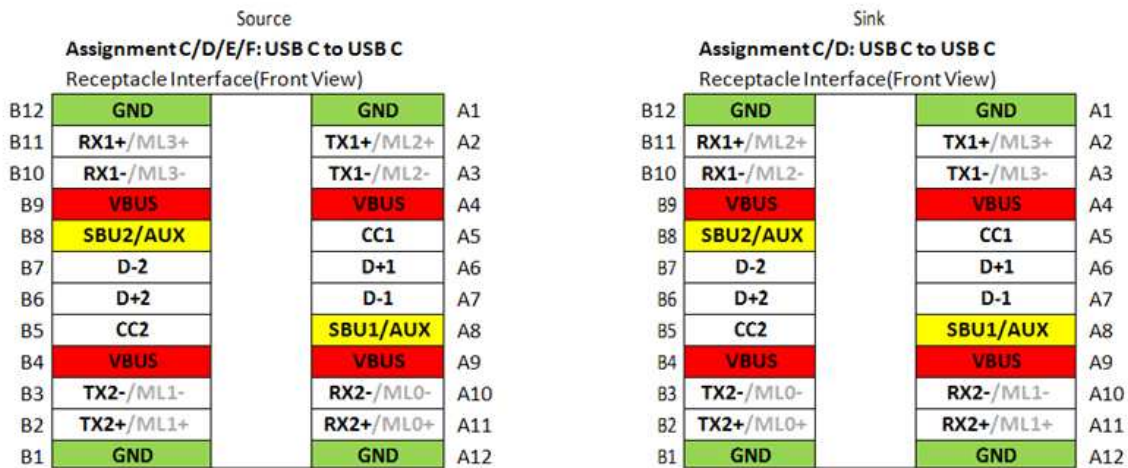


Figure 7. Pin Assignment – Alternate Mode Over Type C

[Table 2](#) represents the example pin mapping to HD3SS460 for the DP Source pin assignments C, D, E and F, DP Sink pin assignments C and D.

Table 2. SOURCE Pin Assignment Option C and E (AMSEL = H, EN = H)

| RECEPTACLE PIN NUMBER | 460 PIN MAPPING TO TYPE C CONNECTOR | 460 PIN MAPPING TO DP SOURCE (GPU) | |
|-----------------------|-------------------------------------|------------------------------------|------------|
| | | POL = L | POL = H |
| A11/10 | CRX2 | LnA(ML0) | LnD(ML3) |
| A2/3 | CTX1 | LnC(ML2) | LnB(ML1) |
| B11/10 | CRX1 | LnD(ML3) | LnA(ML0) |
| B2/3 | CTX2 | LnB(ML1) | LnC(ML2) |
| A8 | CSBU1 | SBU1(AUXP) | SBU2(AUXN) |
| B8 | CSBU2 | SBU2(AUXN) | SBU1(AUXP) |


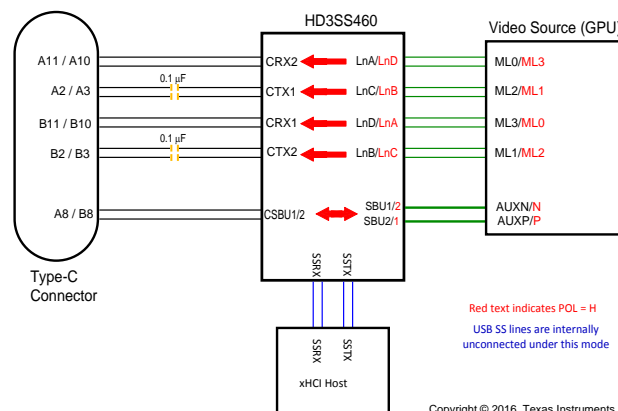



Figure 8. SOURCE Pin Assignment Option C and E (AMSEL = H, EN = H)

Table 3. SOURCE Pin Assignment Option D and F (AMSEL = L, EN = H)

| RECEPTACLE PIN NUMBER | 460 PIN MAPPING TO TYPE C CONNECTOR | 460 PIN MAPPING TO DP SOURCE (GPU) | |
|-----------------------|-------------------------------------|------------------------------------|------------|
| | | POL = L | POL = H |
| A11 / A10 | CRX2 | LnA(ML0) | SSRX |
| A2 / A3 | CTX1 | SSTX | LnB(ML1) |
| B11 / B10 | CRX1 | SSRX | LnA(ML0) |
| B2 / B3 | CTX2 | LnB(ML1) | SSTX |
| A8 | CSBU1 | SBU1(AUXP) | SBU2(AUXN) |
| B8 | CSBU2 | SBU2(AUXN) | SBU1(AUXP) |

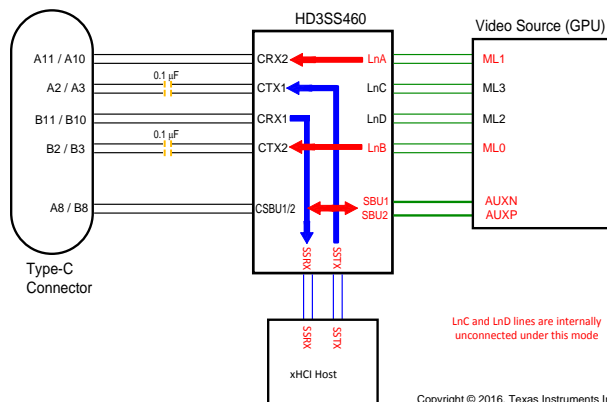

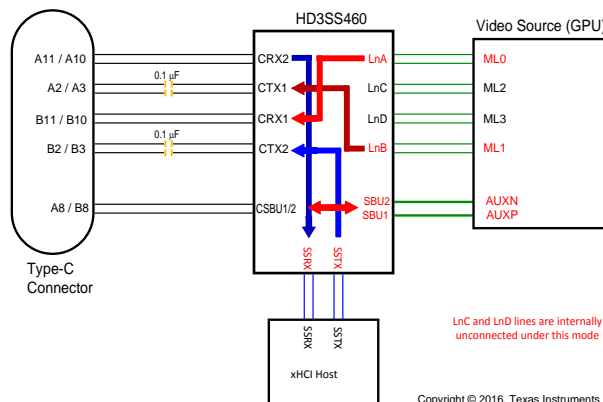Copyright © 2016, Texas Instruments Incorporated




Copyright © 2016, Texas Instruments Incorporated

Figure 9. SOURCE Pin Assignment Option D and F (AMSEL = L, EN = H, POL = L)

Figure 10. SOURCE Pin Assignment Option D and F (AMSEL = L, EN = H, POL = H)

Table 4. SINK Pin Assignment Option C (AMSEL = H, EN = H)

| RECEPTACLE PIN NUMBER | 460 PIN MAPPING TO TYPE C CONNECTOR | 460 PIN MAPPING TO DP SOURCE (GPU) | |
|-----------------------|-------------------------------------|------------------------------------|------------|
| | | POL = L | POL = H |
| A11 / A10 | CRX2 | LnA(ML1) | LnD(ML2) |
| A2 / A3 | CTX1 | LnC(ML3) | LnB(ML0) |
| B11 / B10 | CRX1 | LnD(ML2) | LnA(ML1) |
| B2 / B3 | CTX2 | LnB(ML0) | LnC(ML3) |
| A8 | CSBU1 | SBU1(AUXN) | SBU2(AUXP) |
| B8 | CSBU2 | SBU2(AUXP) | SBU1(AUXN) |

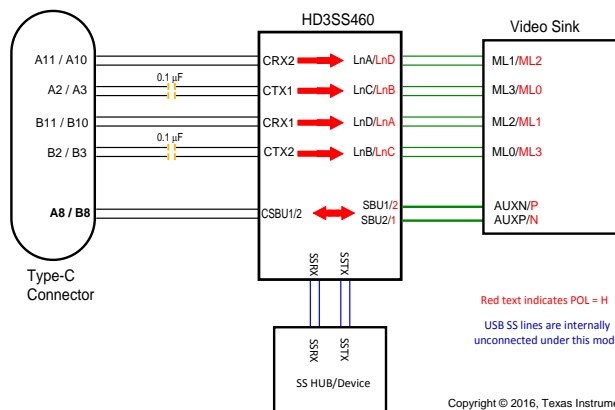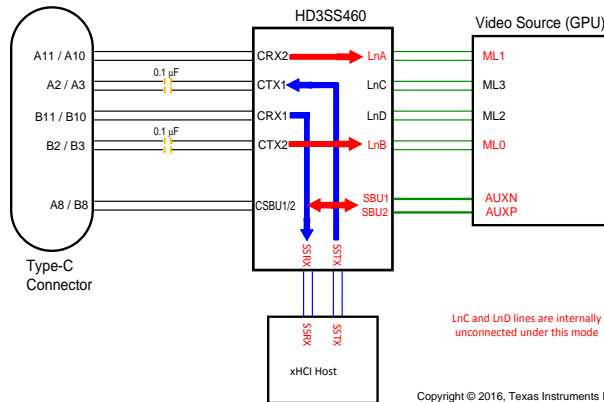
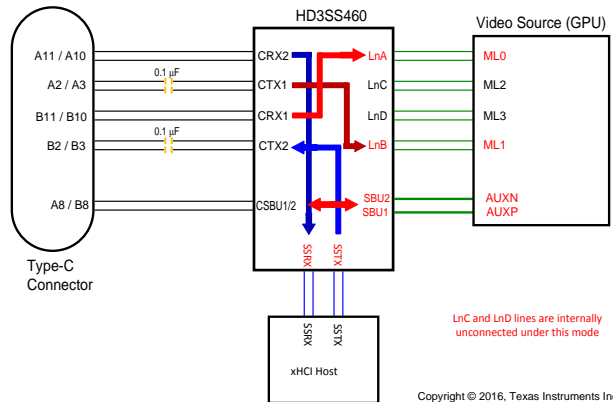


Copyright © 2016, Texas Instruments Incorporated

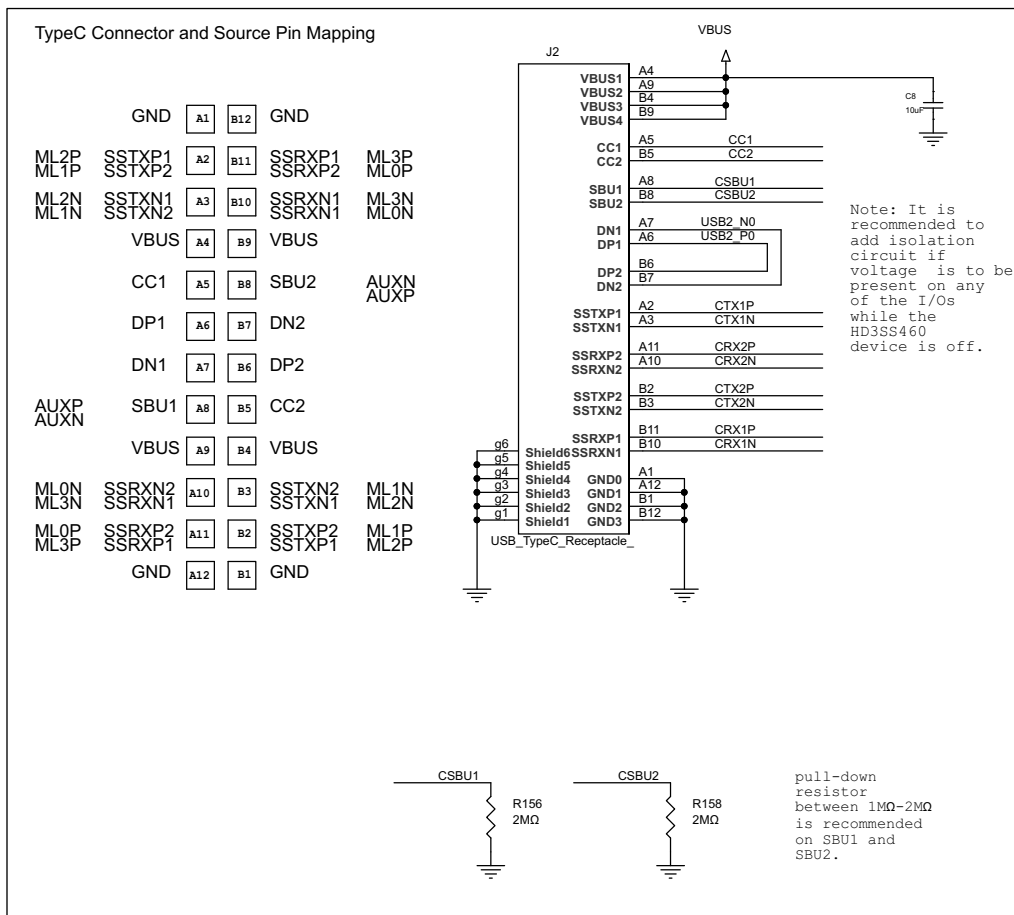
Figure 11. SINK Pin Assignment Option C (AMSEL = H, EN = H)

Table 5. SINK Pin Assignment Option D (AMSEL = L, EN = H)

| RECEPTACLE PIN NUMBER | 460 PIN MAPPING TO TYPE C CONNECTOR | 460 PIN MAPPING TO DP SOURCE (GPU) | |
|-----------------------|-------------------------------------|------------------------------------|------------|
| | | POL = L | POL = H |
| A11/10 | CRX2 | LnA(ML1) | SSRX |
| A2/3 | CTX1 | SSTX | LnB(ML0) |
| B11/10 | CRX1 | SSRX | LnA(ML1) |
| B2/3 | CTX2 | LnB(ML0) | SSTX |
| A8 | CSBU1 | SBU1(AUXN) | SBU2(AUXP) |
| B8 | CSBU2 | SBU2(AUXP) | SBU1(AUXN) |

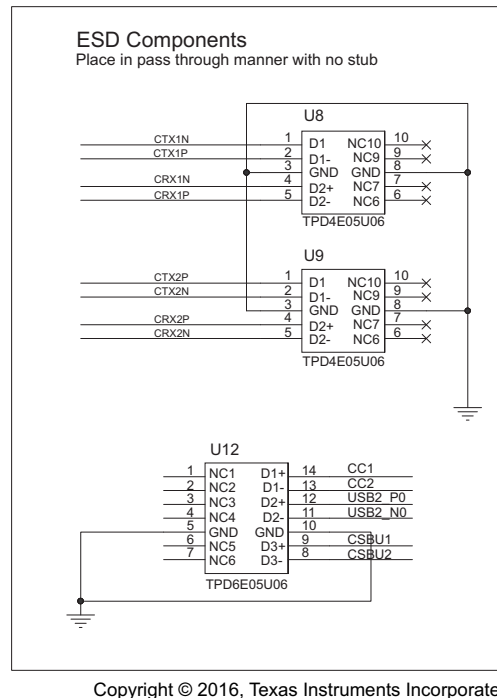

Figure 12. SINK Pin Assignment Option D (AMSEL = L, EN = H, POL=L)

Figure 13. SINK Pin Assignment Option D (AMSEL = L, EN = H, POL=H)

Schematic diagrams [Figure 14](#), [Figure 15](#), and [Figure 16](#) show the DP Source/USB Host implementation; and, [Figure 17](#), [Figure 18](#), and [Figure 19](#) show the DP Sink/USB Device/HUSB Hub/Dock implementation, respectively.





Copyright © 2016, Texas Instruments Incorporated

Figure 14. Schematic Implementations for DP Source/ USB Host (1 of 3)


Figure 15. Schematic Implementations for DP Source/ USB Host (2 of 3)


HD3SS460

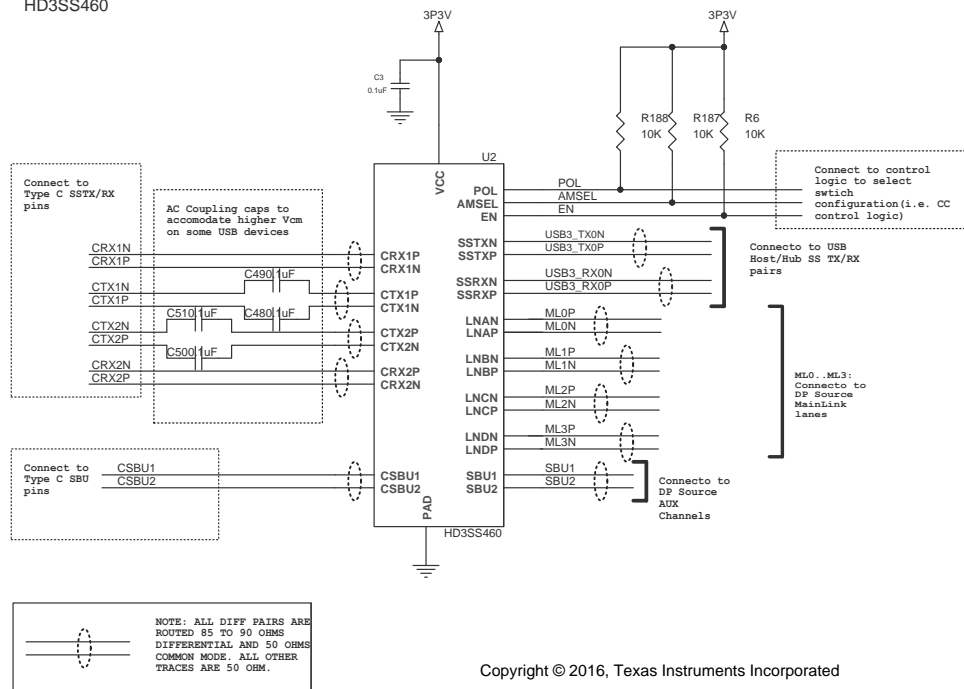
Figure 16. Schematic Implementations for DP Source/ USB Host (3 of 3)

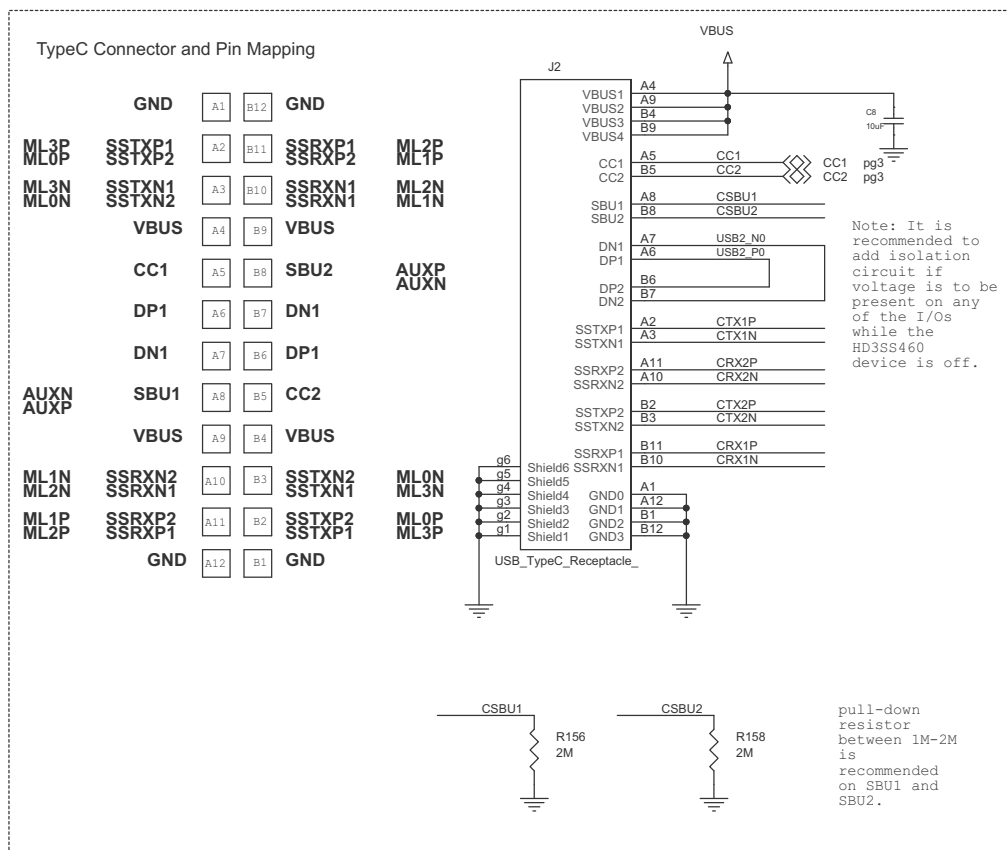


Copyright © 2016, Texas Instruments Incorporated

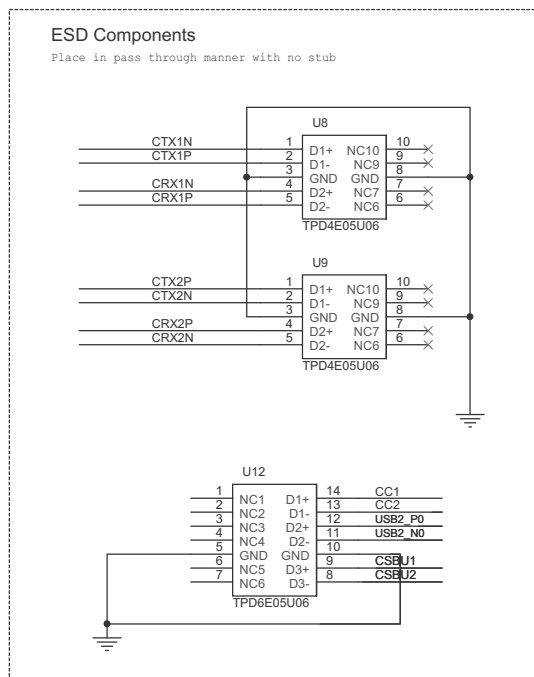Figure 17. Schematic Implementations for DP Sink/ USB Device/HUB/Dock (1 of 3)



Copyright © 2016, Texas Instruments Incorporated

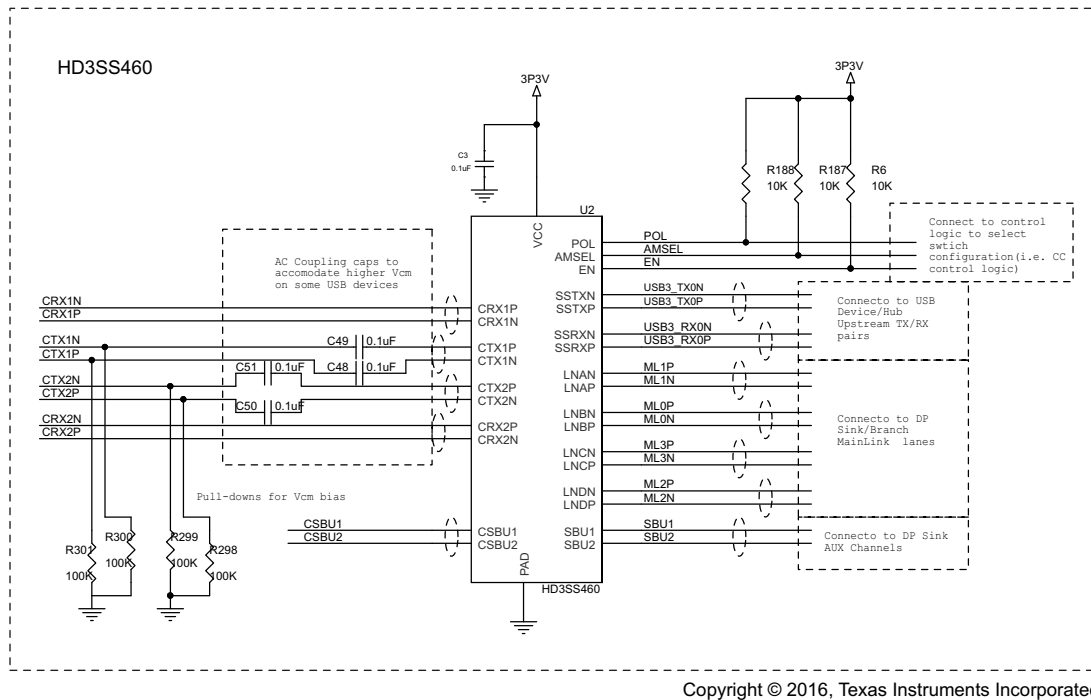Figure 18. Schematic Implementations for DP Sink/ USB Device/HUB/Dock (2 of 3)



Copyright © 2016, Texas Instruments Incorporated

Figure 19. Schematic Implementations for DP Sink/ USB Device/HUB/Dock (3 of 3)

10 Power Supply Recommendations

There is no power supply sequence required for HD3SS460. However it is recommended that EN is asserted low after device supply VCC is stable and within specification. It is also recommended that ample decoupling capacitors are placed at the device V_{CC} near the pin.

11 Layout

11.1 Layout Guidelines

High performance layout practices are paramount for board layout for high speed signals to ensure good signal integrity. Even minor imperfection can cause impedance mismatch resulting reflection. Special care is warranted for traces, connections to device, and connectors.

11.1.1 Critical Routing

The high speed differential signals must be routed with great care to minimize signal quality degradation between the connector and the source or sink of the high speed signals by following the guidelines provided in this document. Depending on the configuration schemes, the speed of each differential pair can reach a maximum speed of 5.4 Gbps. These signals are to be routed first before other signals with highest priority.

- Each differential pair should be routed together with controlled differential impedance of 85 to 90- Ω and 50- Ω common mode impedance. Keep away from other high speed signals. The number of vias should be kept to minimum. Each pair should be separated from adjacent pairs by at least 3 times the signal trace width. Route all differential pairs on the same group of layers (Outer layers or inner layers) if not on the same layer. No 90 degree turns on any of the differential pairs. If bends are used on high speed differential pairs, the angle of the bend should be greater than 135 degrees.
- Length matching:
 - Keep high speed differential pairs lengths within 5 mil of each other to keep the intra-pair skew minimum.
 - The inter-pair matching of the differential pairs is not as critical as intra-pair matching. The SSTX and SSRX pairs do not have to match while they need to be routed as short as possible.
- Keep high speed differential pair traces adjacent to ground plane.
- Do not route differential pairs over any plane split
- ESD components on the high speed differential lanes should be placed nearest to the connector in a pass through manner without stubs on the differential path. In order to control impedance for transmission lines, a solid ground plane should be placed next to the high-speed signal layer. This also provides an excellent low-inductance path for the return current flow.
 - Placement recommendation would be: Connector – ESD Components --- HD3SS460
- For ease of routing, the P and N connection of the USB3.1 differential pairs to the HD3SS460 pins can be swapped as long as the corresponding pairs are swapped on the other end of the switch. The example is shown in the reference EVM schematics section of this document. The P/N can be swapped on USB 3.1 connection of the switch for ease of routing purposes.

11.1.2 General Routing/Placement Rules

- Route all high-speed signals first on un-routed PCB: SSTXP/N, SSRXT/N, LNAP/N, LNB P/N, LNC P/N, LND P/N, CTX*P/N. The stub on USB2 D+ and D- pairs should not exceed 3.5mm.
- Follow 20H rule (H is the distance to reference plane) for separation of the high-speed trace from the edge of the plane
- Minimize parallelism of high speed clocks and other periodic signal traces to high speed lines
- All differential pairs should be routed on the top or bottom layer (microstrip traces) if possible or on the same group of layers. Vias should only be used in the breakout region of the device to route from the top to bottom layer when necessary. Avoid using vias in the main region of the board at all cost. Use a ground reference via next to signal via. Distance between ground reference via and signal need to be calculated to have similar impedance as traces.
- All differential signals should not be routed over plane split. Changing signal layers is preferable to crossing plane splits.
- Use of and proper placement of stitching caps when split plane crossing is unavoidable to account for high-frequency return current path
- Route differential traces over a continuous plane with no interruptions.
- Do not route differential traces under power connectors or other interface connectors, crystals, oscillators, or any magnetic source.
- Route traces away from etching areas like pads, vias, and other signal traces. Try to maintain a 20 mil keep-out distance where possible.

Layout Guidelines (continued)

- Decoupling capacitors should be placed next to each power terminal on the HD3SS460. Care should be taken to minimize the stub length of the trace connecting the capacitor to the power pin.
- Avoid sharing vias between multiple decoupling capacitors.
- Place vias as close as possible to the decoupling capacitor solder pad.
- Widen VCC/GND planes to reduce effect of static and dynamic IR drop.
- The VBUS traces/planes must be wide enough to carry maximum of 2 A current.

11.2 Layout Example

Figure 20, Figure 21, and Figure 22 illustrate some guidelines for layout. Actual layout should be optimized for various factors such as board geometry, connector type, and application.

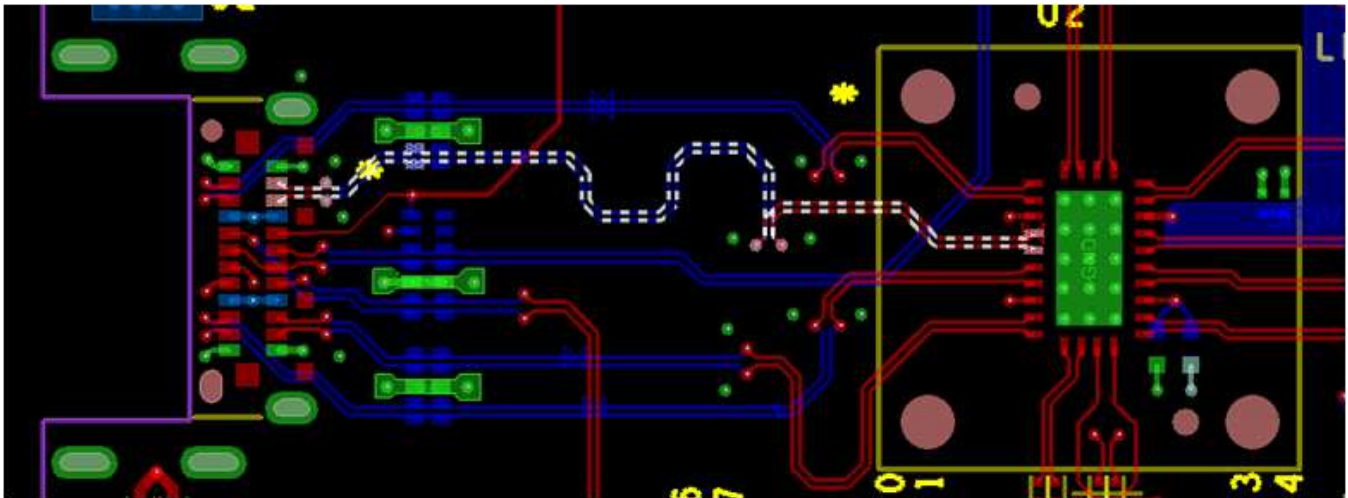


Figure 20. USB Type C Connector to HD3SS460 Signal Routing

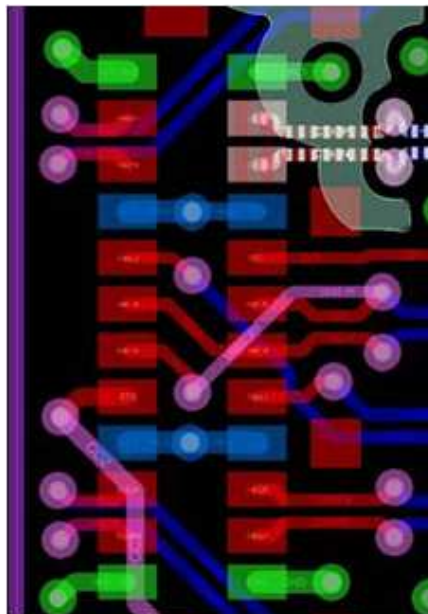


Figure 21. Dual SMT Mid-Mount Type C Connector Layout Example Zoom-in

Layout Example (continued)

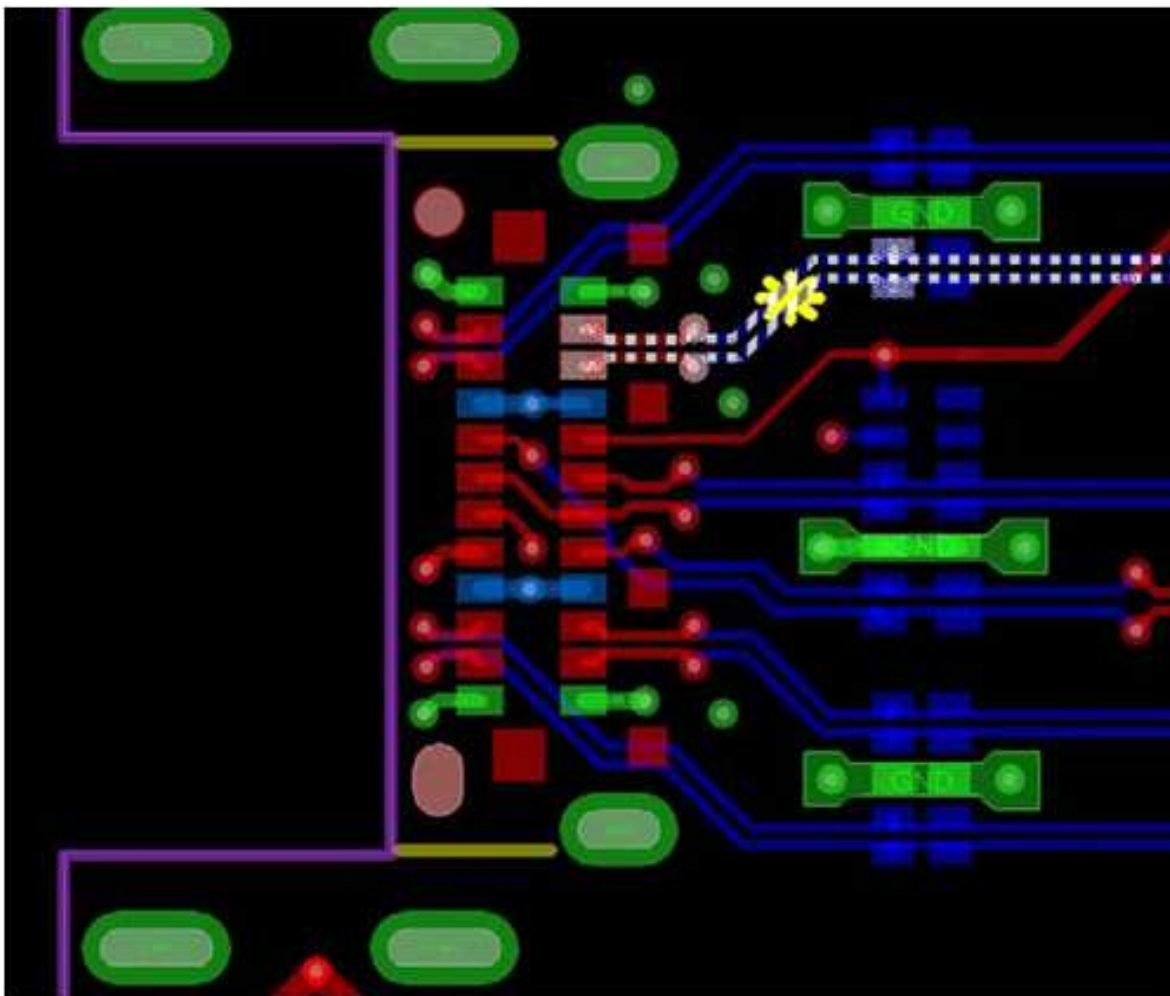


Figure 22. Dual-row SMT Mid-mount Type C with ESD Components

12 Device and Documentation Support

12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates — go to the product folder for your device on ti.com. In the upper right-hand corner, click the *Alert me* button to register and receive a weekly digest of product information that has changed (if any). For change details, check the revision history of any revised document.

12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.3 Trademarks

E2E is a trademark of Texas Instruments.

USB Type-C is a trademark of USB-IF, Inc..

All other trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




RHR0028A

PACKAGE OUTLINE

WQFN - 0.8 mm max height

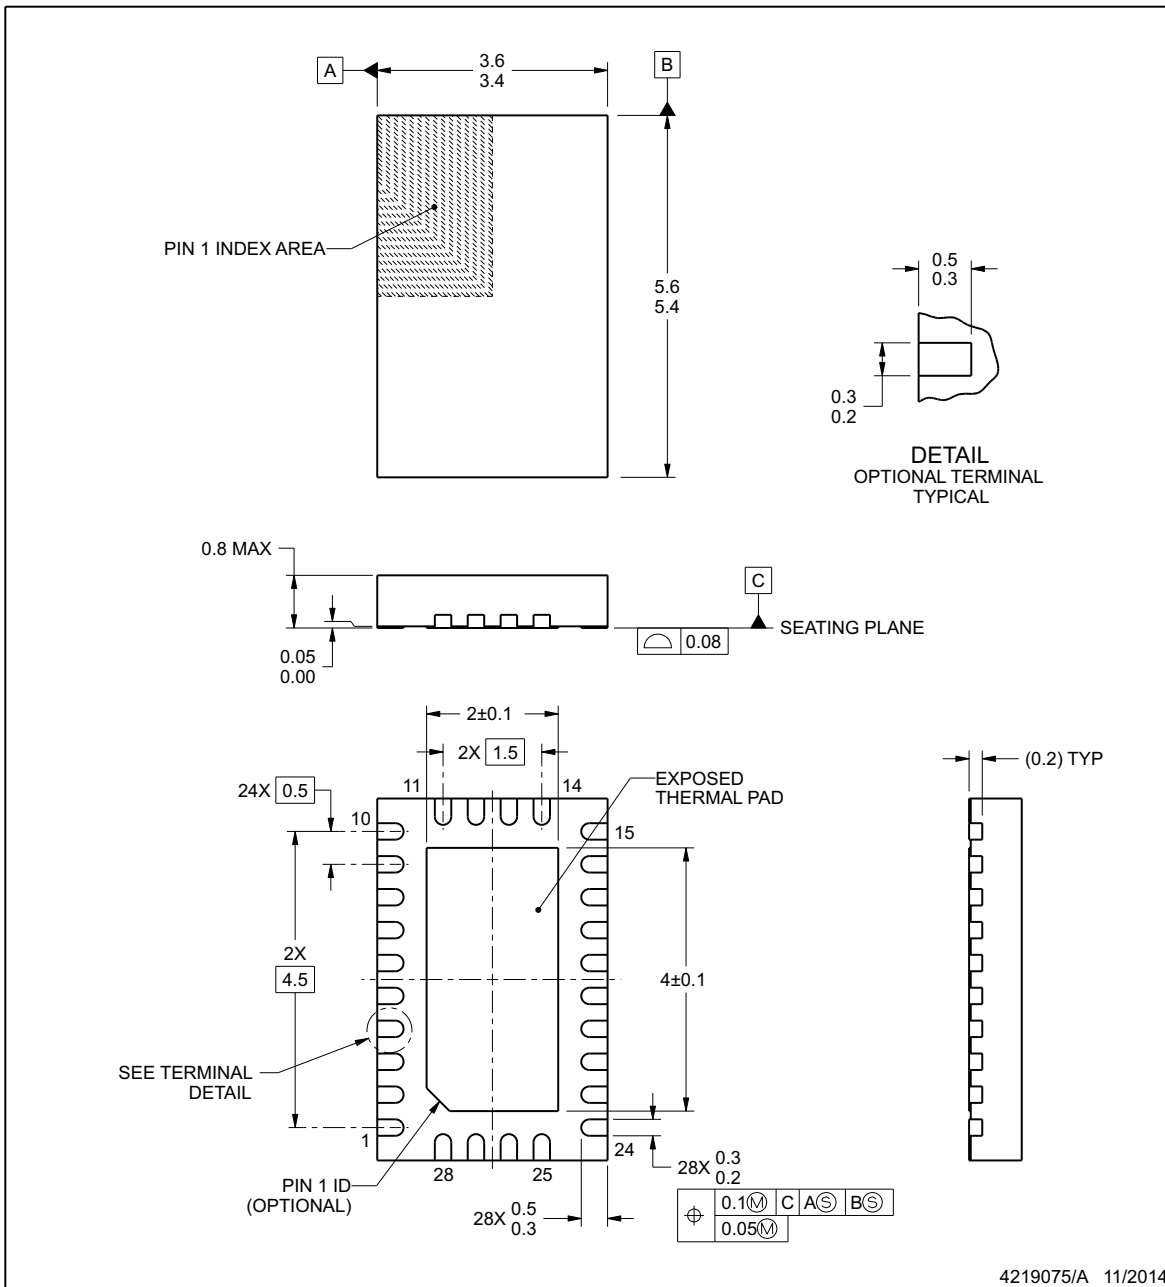PLASTIC QUAD FLATPACK - NO LEAD



NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT

RHR0028A

WQFN - 0.8 mm max height

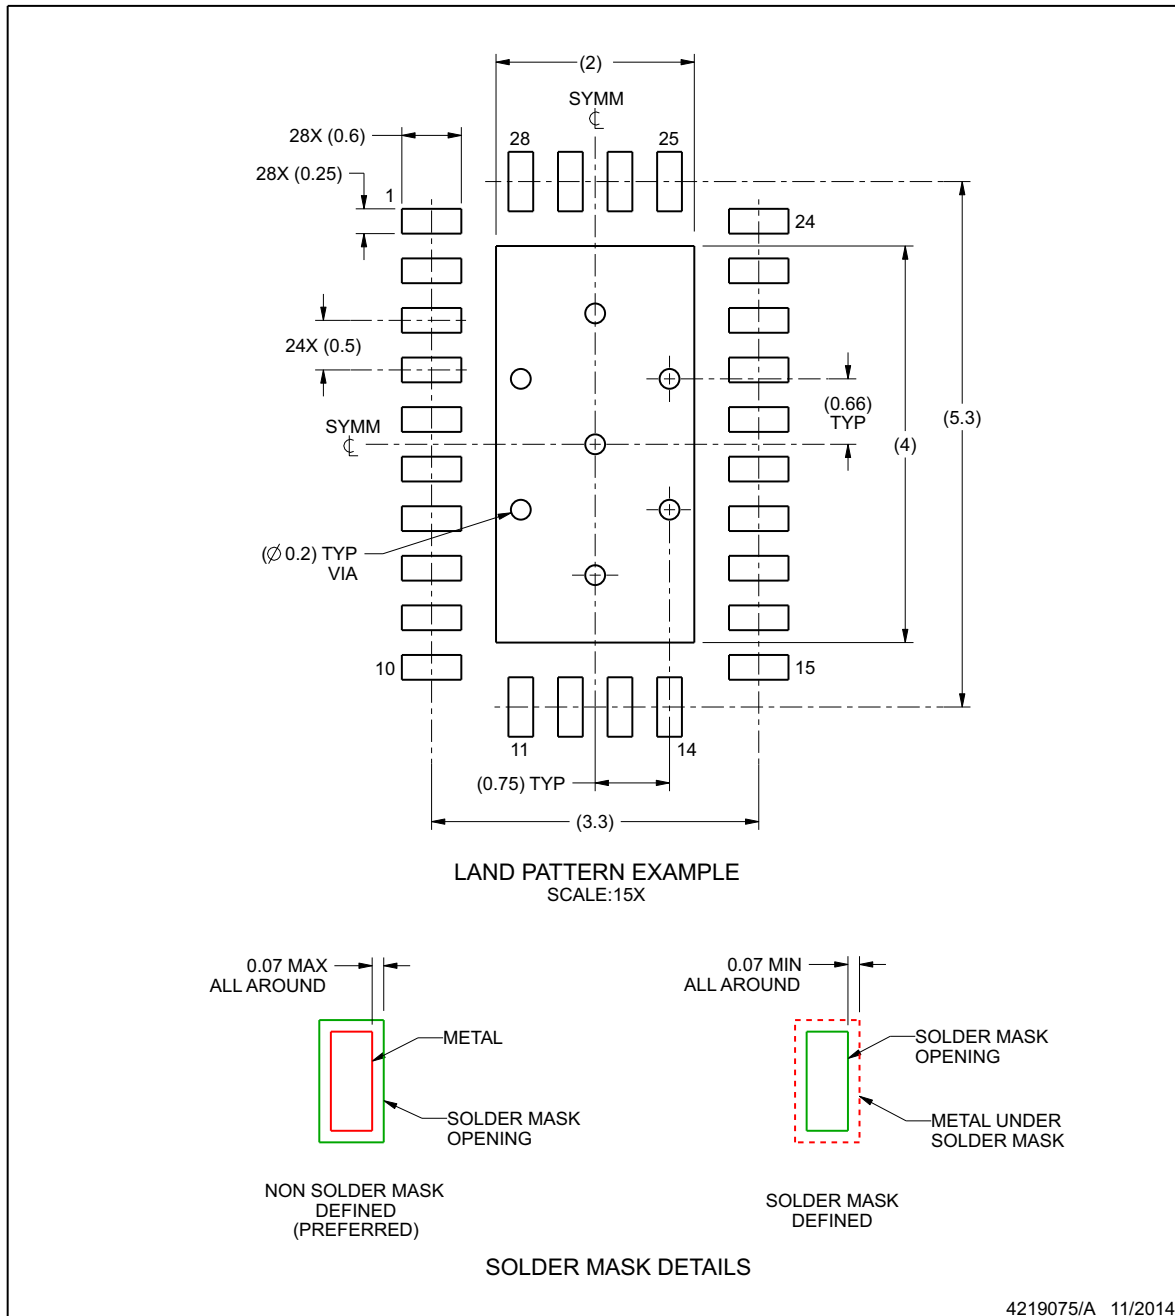PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).

EXAMPLE STENCIL DESIGN

RHR0028A

WQFN - 0.8 mm max height

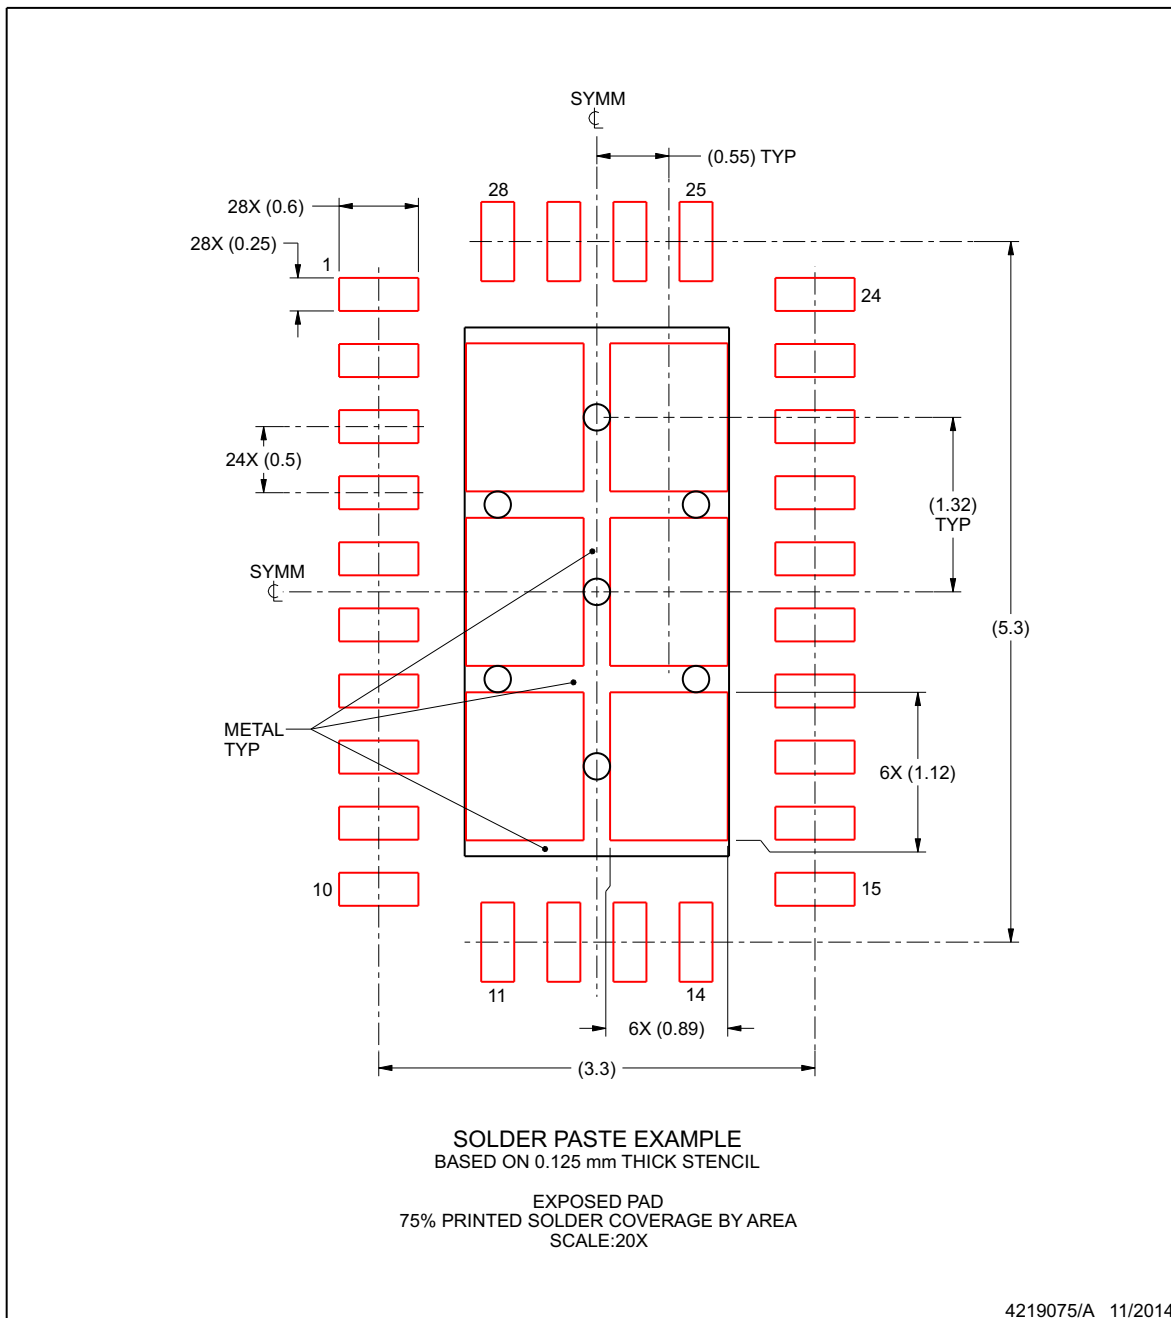PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| HD3SS460IRHRR | ACTIVE | WQFN | RHR | 28 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 3SS460I | Samples |
| HD3SS460IRHRT | ACTIVE | WQFN | RHR | 28 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 3SS460I | Samples |
| HD3SS460RHRR | ACTIVE | WQFN | RHR | 28 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | 3SS460 | Samples |
| HD3SS460RHRT | ACTIVE | WQFN | RHR | 28 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | 3SS460 | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| HD3SS460IRHRR | WQFN | RHR | 28 | 3000 | 330.0 | 12.4 | 3.8 | 5.8 | 1.2 | 8.0 | 12.0 | Q1 |
| HD3SS460IRHRT | WQFN | RHR | 28 | 250 | 180.0 | 12.4 | 3.8 | 5.8 | 1.2 | 8.0 | 12.0 | Q1 |
| HD3SS460RHRR | WQFN | RHR | 28 | 3000 | 330.0 | 12.4 | 3.8 | 5.8 | 1.2 | 8.0 | 12.0 | Q1 |
| HD3SS460RHRT | WQFN | RHR | 28 | 250 | 180.0 | 12.4 | 3.8 | 5.8 | 1.2 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| HD3SS460IRHRR | WQFN | RHR | 28 | 3000 | 367.0 | 367.0 | 35.0 |
| HD3SS460IRHRT | WQFN | RHR | 28 | 250 | 210.0 | 185.0 | 35.0 |
| HD3SS460RHRR | WQFN | RHR | 28 | 3000 | 367.0 | 367.0 | 35.0 |
| HD3SS460RHRT | WQFN | RHR | 28 | 250 | 210.0 | 185.0 | 35.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com