


## TOP VIEW



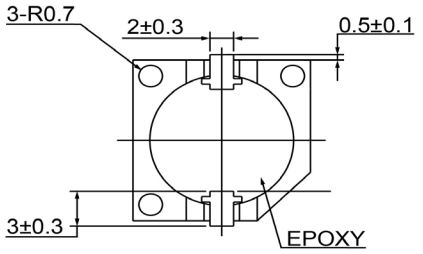

## SIDE VIEW (1)



## SIDE VIEW (2)




## BOTTOM VIEW




| Specifications | | |
|---|---|---|
| **Description** | **Value** | **Unit** |
| Technology | Electro-Mechanical | |
| Resonant Frequency | 2,400 | (Hz) |
| Rated Voltage | 3 | (V) |
| SPL @ 10cm | 75 | (dBA) |
| Tone | Single | |
| Mount Type | Surface Mount | |
| Voltage Range | 2 ~ 5 | (V) |
| Max Rated Current | 30 | (mA) |
| Housing Material | PPS | |
| Operating Temperature | -30 ~ +70 | ℃ |
| Storage Temperature | -40 ~ +85 | ℃ |
| Weight | 2 | (g) |

**Notes**

1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS

DB UNLIMITED

**Revision History**

| Version | Description | Date | Approved |
|---|---|---|---|
| 1 | Released from Engineering | 10/21/2013 | J.S |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| Drawn by | Date | Checked by | Date | Approved by | Date |
|---|---|---|---|---|---|
| A.B. | 10/21/2013 | C.E. | 10/21/2013 | J.S | 10/21/2013 |

**Electro-Mechanical Indicator**

**IE122403-1**

sales@dbunlimitedco.com | www.dbunlimitedco.com
©2013, DB Unlimited