Leiditech


MM5Z2V0~MM5Z75

Features

- Standard Zener Breakdown Voltage Range 2.0 V to 75 V
- Steady State Power Rating of 200 mW

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

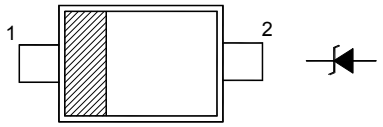

Top View
Simplified outline SOD-523 and symbol

Absolute Maximum Ratings (T_a = 25 °C)


Parameter	Symbol	Value	Unit
Total Device Dissipaton	P_{tot}	200	mW
Junction and Storage Temperature Range	T_j , T_{stg}	- 65 to + 150	°C

Characteristics at T_a = 25 °C

Parameter	Symbol	Max.	Unit
Forward Voltage at I_F = 10 mA	V_F	0.9	V

Type	Marking Code	Zener Voltage [1]				Zener Impedance				Leakage Current	
		V_{ZT}			at I_{ZT}	Z_{ZT}	at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R	at V_R
		Min. (V)	Nom. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
MM5Z2V0	WY	1.8	2.0	2.15	5	100	5	-	-	120	0.5
MM5Z2V4	00	2.2	2.4	2.6	5	100	5	1000	1	120	1
MM5Z2V7	01	2.5	2.7	2.9	5	100	5	1000	1	120	1
MM5Z3V0	02	2.8	3.0	3.2	5	100	5	1000	1	50	1
MM5Z3V3	05	3.1	3.3	3.5	5	95	5	1000	1	20	1
MM5Z3V6	06	3.4	3.6	3.8	5	90	5	1000	1	10	1
MM5Z3V9	07	3.7	3.9	4.1	5	90	5	1000	1	5	1
MM5Z4V3	08	4	4.3	4.6	5	90	5	1000	1	5	1
MM5Z4V7	09	4.4	4.7	5	5	80	5	800	1	2	1
MM5Z5V1	0A	4.8	5.1	5.4	5	60	5	500	1	2	1.5
MM5Z5V6	0C	5.2	5.6	6	5	40	5	200	1	1	2.5
MM5Z6V2	0E	5.8	6.2	6.6	5	10	5	100	1	1	3
MM5Z6V8	0F	6.4	6.8	7.2	5	15	5	160	1	0.5	3.5
MM5Z7V5	0G	7	7.5	7.9	5	15	5	160	1	0.5	4
MM5Z8V2	0H	7.7	8.2	8.7	5	15	5	160	1	0.5	5
MM5Z9V1	0K	8.5	9.1	9.6	5	15	5	160	1	0.5	6
MM5Z10	0L	9.4	10	10.6	5	20	5	160	1	0.1	7
MM5Z11	0M	10.4	11	11.6	5	20	5	160	1	0.1	8
MM5Z12	0N	11.4	12	12.7	5	25	5	80	1	0.1	9
MM5Z13	0P	12.4	13	14.1	5	30	5	80	1	0.1	10
MM5Z15	0T	13.8	15	15.6	5	30	5	80	1	0.1	11
MM5Z16	0U	15.3	16	17.1	2	40	2	80	1	0.1	12
MM5Z18	0W	16.8	18	19.1	2	45	2	80	1	0.1	13
MM5Z20	0Z	18.8	20	21.2	2	55	2	100	1	0.1	15
MM5Z22	10	20.8	22	23.3	2	55	2	100	1	0.1	17
MM5Z24	11	22.8	24	25.6	2	70	2	120	1	0.1	19
MM5Z27	12	25.1	27	28.9	2	80	2	300	1	0.1	21
MM5Z30	14	28	30	32	2	80	2	300	1	0.1	23
MM5Z33	18	31	33	35	2	80	2	300	1	0.1	25
MM5Z36	19	34	36	38	2	90	2	500	1	0.1	27
MM5Z39	20	37	39	41	2	130	2	500	1	2	30
MM5Z43	21	40	43	46	1	150	1	500	1	2	33
MM5Z47	1A	44	47	50	1	170	1	500	1	2	36
MM5Z51	1C	48	51	54	1	180	1	500	1	1	39
MM5Z56	1D	52	56	60	1	200	1	500	1	1	43
MM5Z62	1E	58	62	66	1	215	1	500	1	0.2	47
MM5Z68	1F	64	68	72	1	240	1	500	1	0.2	52
MM5Z75	1G	70	75	79	1	255	1	500	1	0.2	57


[1] Tested with pulses tp = 20 ms.

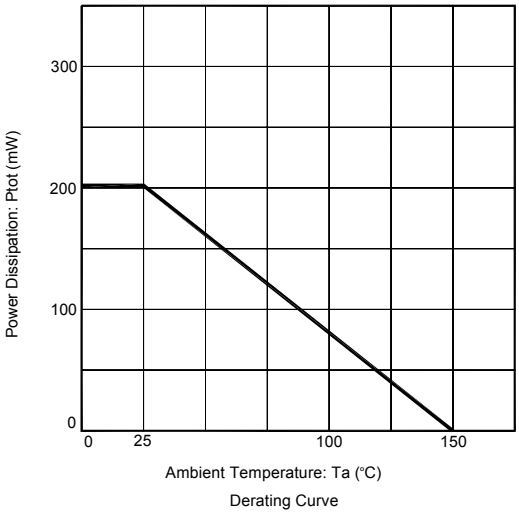

Derating Curve

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads **SOD-523**

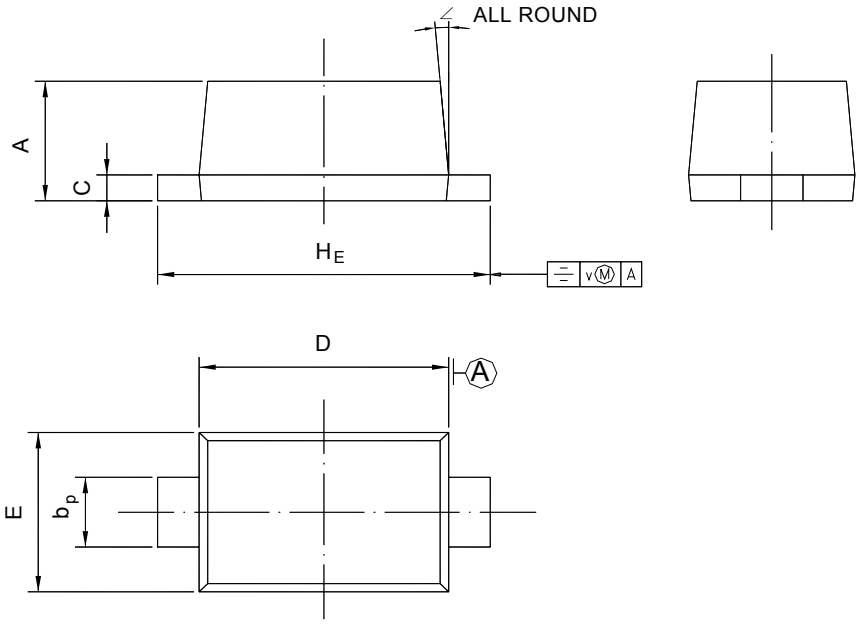

UNIT	A	b_p	C	D	E	H_E	V	∠
mm	0.70 0.60	0.4 0.3	0.135 0.100	1.25 1.15	0.85 0.75	1.7 1.5	0.1	5°

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059