


1. Mechanical Dimensions:

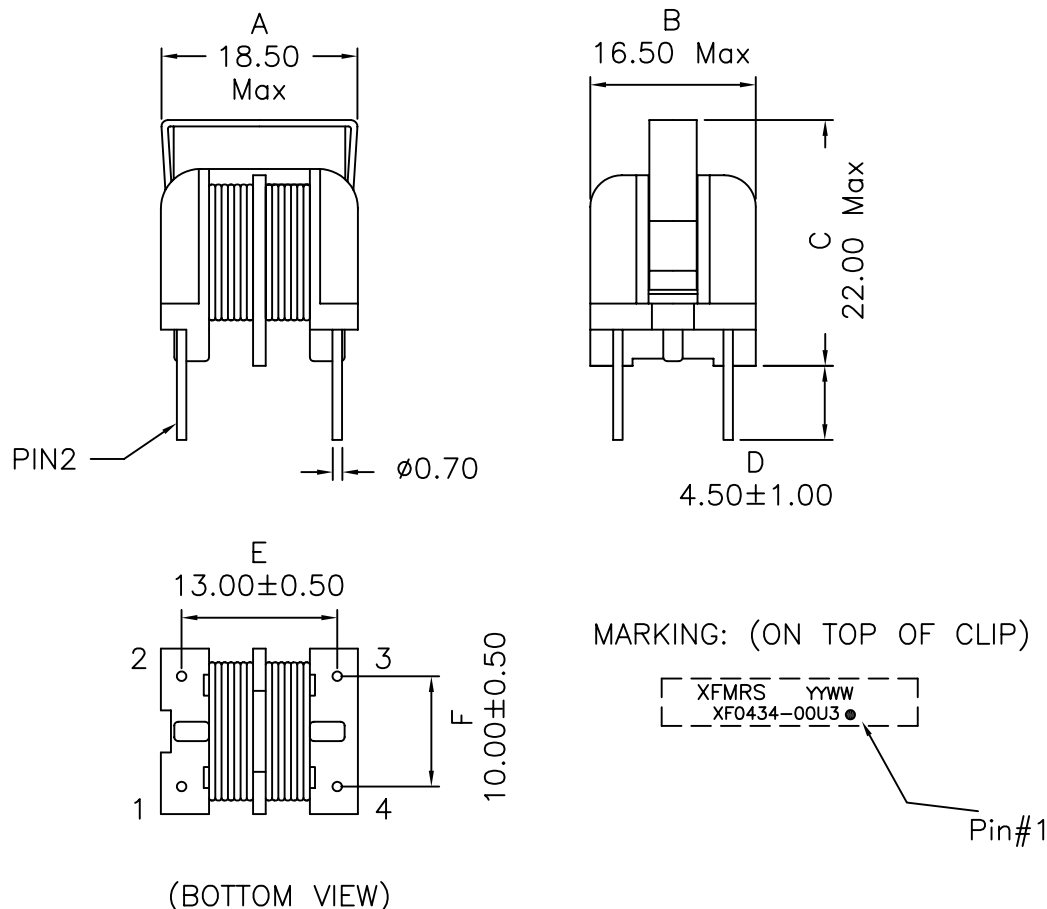


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -20°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV.: A/3

2. Schematic:

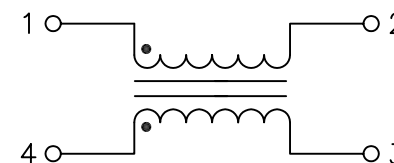

3. Electrical Specifications:

- OCL: 4.30mH Min @100KHz 0.1V Each Wdg -5°C to +105°C
 Pins 1-2 3.50mH Min @100KHz, 0.1V -20°C to -5°C
- Q: Pins 1-2 30 Min @10KHz 0.1V
- Rated Voltage: 367-400Vrms Max
- Rated Current: 1.10A
- DCR: 0.414 Ohms Max Each Wdg.
- Turns Ratio: (1-2):(4-3)=1:1±2%
- Hipot: 2000Vac 1 minute (Pins1-2 TO Pins3-4)

XFMRS Inc www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0434-00U3	REV. A
TOLERANCES: .xx ±0.25	DWN.	Mei Chen	Dec-17-09
Dimensions in MM	CHK.	YK Liao	Dec-17-09
SHEET 1 OF 1	APP.	BW	Dec-17-09