EVERLIGHT AMERICAS

DATASHEET

SMD ▪ B
EAST1608RGA1



Features
- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description
- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications
- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Device Selection Guide

Code	Chip Materials	Emitted Color	Resin Color
R6	AlGaInP	Brilliant Red	Water Clear
G6	InGaN	Brilliant Yellow Green	

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Code	Rating	Unit
Forward Current	I_F	R6	25	mA
		G6	25	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	R6	60	mA
		G6	60	
Power Dissipation	Pd	R6	60	mW
		G6	60	
Electrostatic Discharge	ESD_{HBM}	R6	2000	V
		G6	2000	
Operating Temperature	T_{opr}		-40 ~ +85	℃
Storage Temperature	Tstg		-40 ~ +90	℃
Soldering Temperature	Tsol		Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Code	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	R6	45.0	-----	112	mcd	
		G6	22.5	-----	57.0		
Viewing Angle	$2\theta_{1/2}$		-----	120	-----	deg	
Peak Wavelength	λ p	R6	-----	632	-----	nm	
		G6	-----	575	-----		
Dominant Wavelength	λ d	R6	620.0	-----	628.0	nm	I_F=20mA
		G6	567.5	-----	575.5		
Spectrum Radiation Bandwidth	△ λ	R6	-----	20	-----	nm	
		G6	-----	20	-----		
Forward Voltage	V_F	R6	1.7	2.0	2.4	V	
		G6	1.7	2.0	2.4		

Note:
1.Tolerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm
3. Tolerance of Forward Voltage: ±0.10V

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

R6
Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
P	45.0	72.0	mcd	I_F =20mA
Q	72.0	112.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
1	620.0	624.0	nm	I_F =20mA
2	624.0	628.0		

G6
Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
M2	22.5	28.5	mcd	I_F =20mA
N1	28.5	36.0		
N2	36.0	45.0		
P1	45.0	57.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
C15	567.5	569.5	nm	I_F =20mA
C16	569.5	571.5		
C17	571.5	573.5		
C18	573.5	575.5		


Note:
1.Tolerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1


Typical Electro-Optical Characteristics Curves

R6


Spectrum Distribution

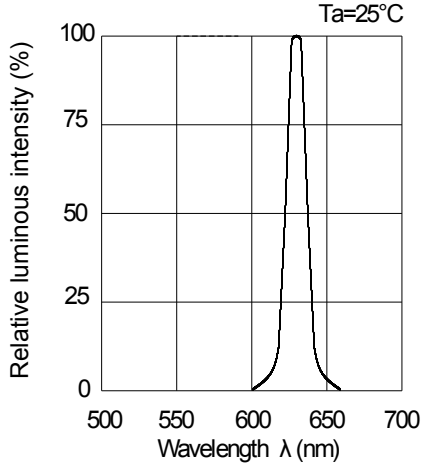


Forward Current vs. Forward Voltage

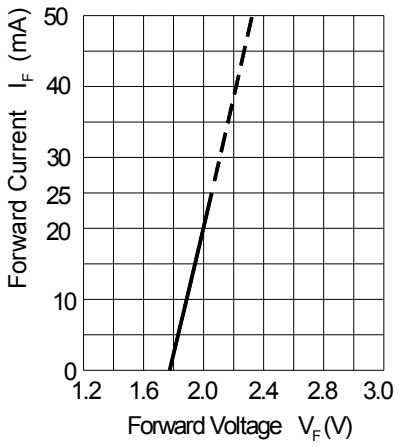


Luminous Intensity vs. Ambient Temperature

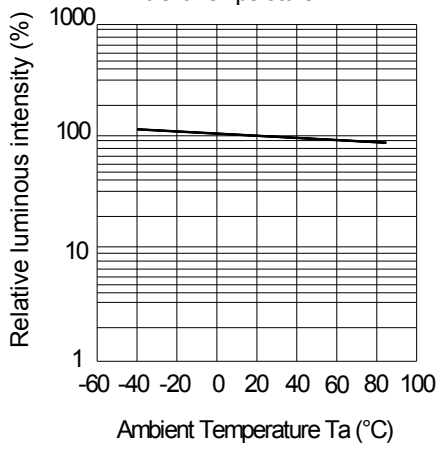


Luminous Intensity vs. Forward Current

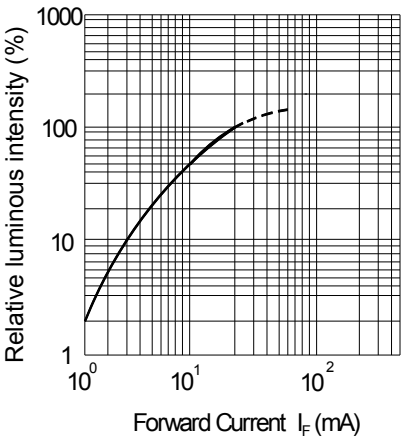

Forward Current Derating Curve

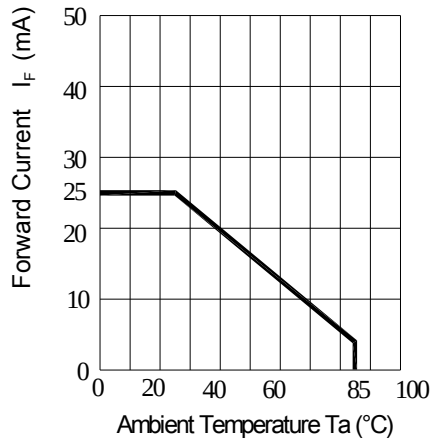

Radiation Diagram

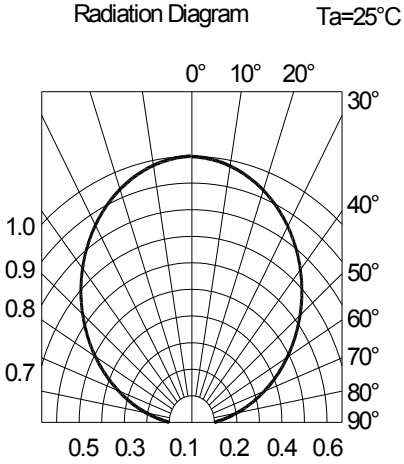


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1


Typical Electro-Optical Characteristics Curves

G6


Spectrum Distribution

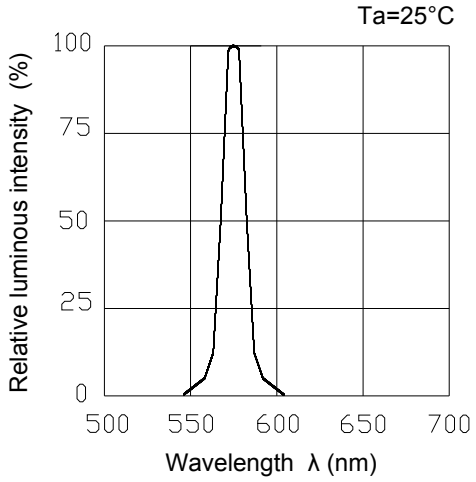


Forward Current vs. Forward Voltage

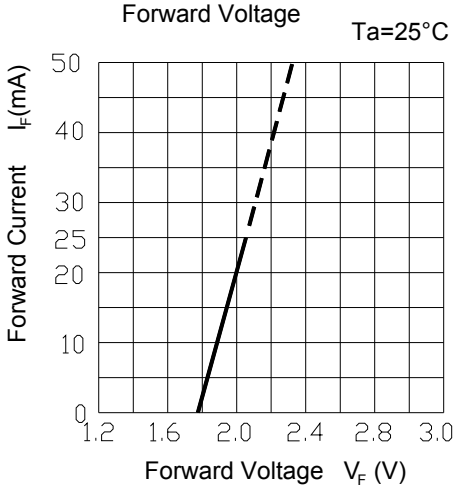


Luminous Intensity vs. Ambient Temperature

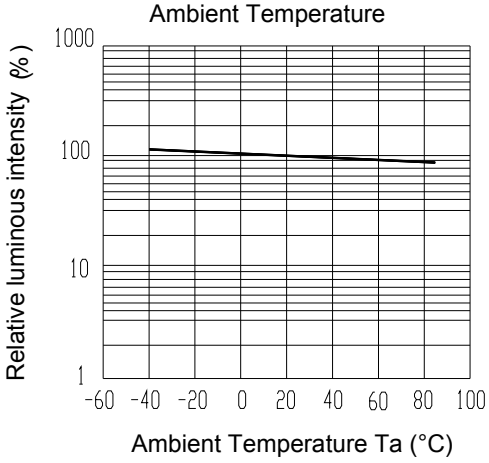


Luminous Intensity vs. Forward Current

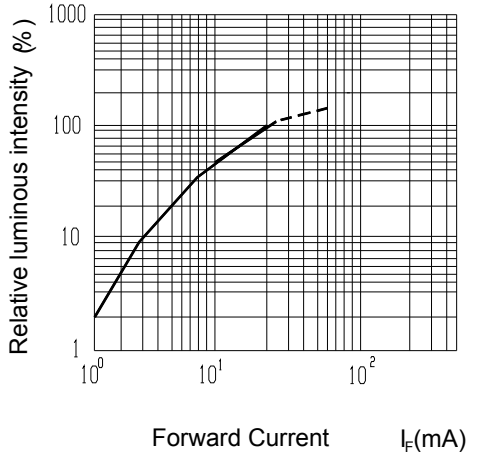

Forward Current Derating Curve

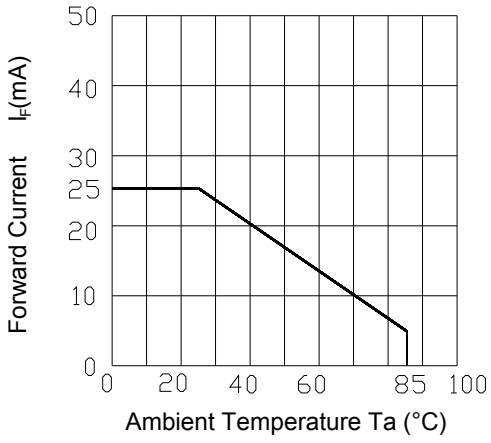



Radiation Diagram

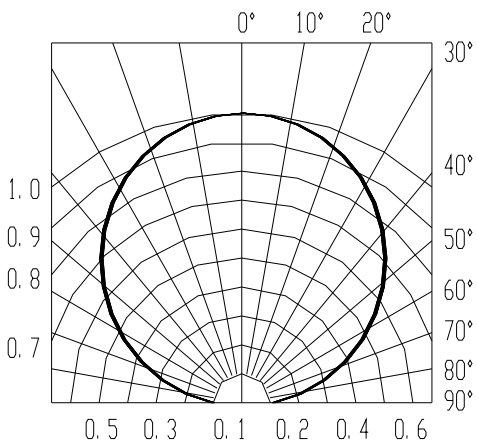


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Package Dimension

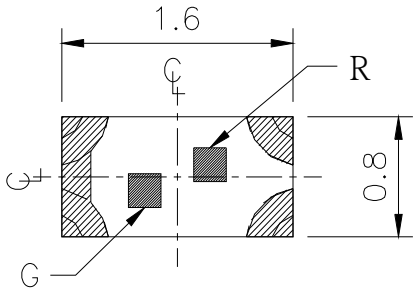


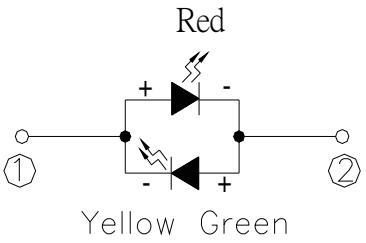


Polarity

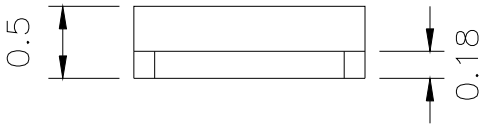

Recommend sodering pad

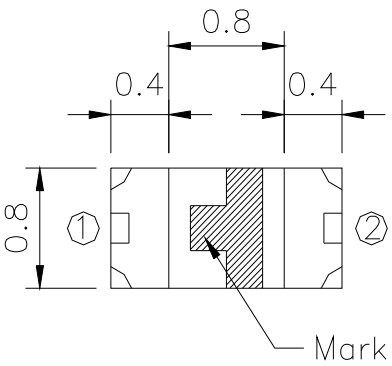

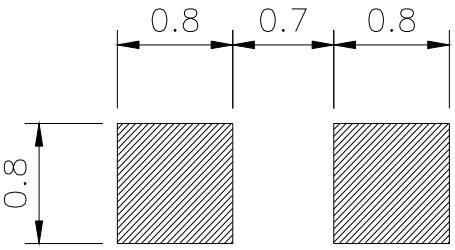


Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Label Explanation

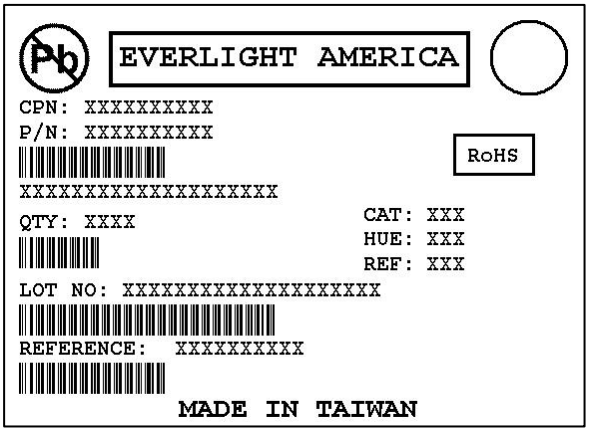

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


Reel Dimensions

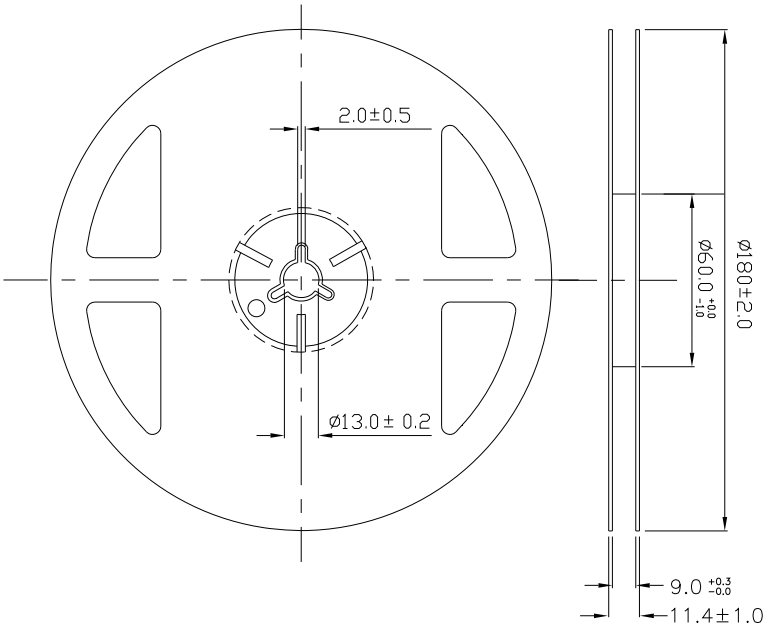

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm


Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

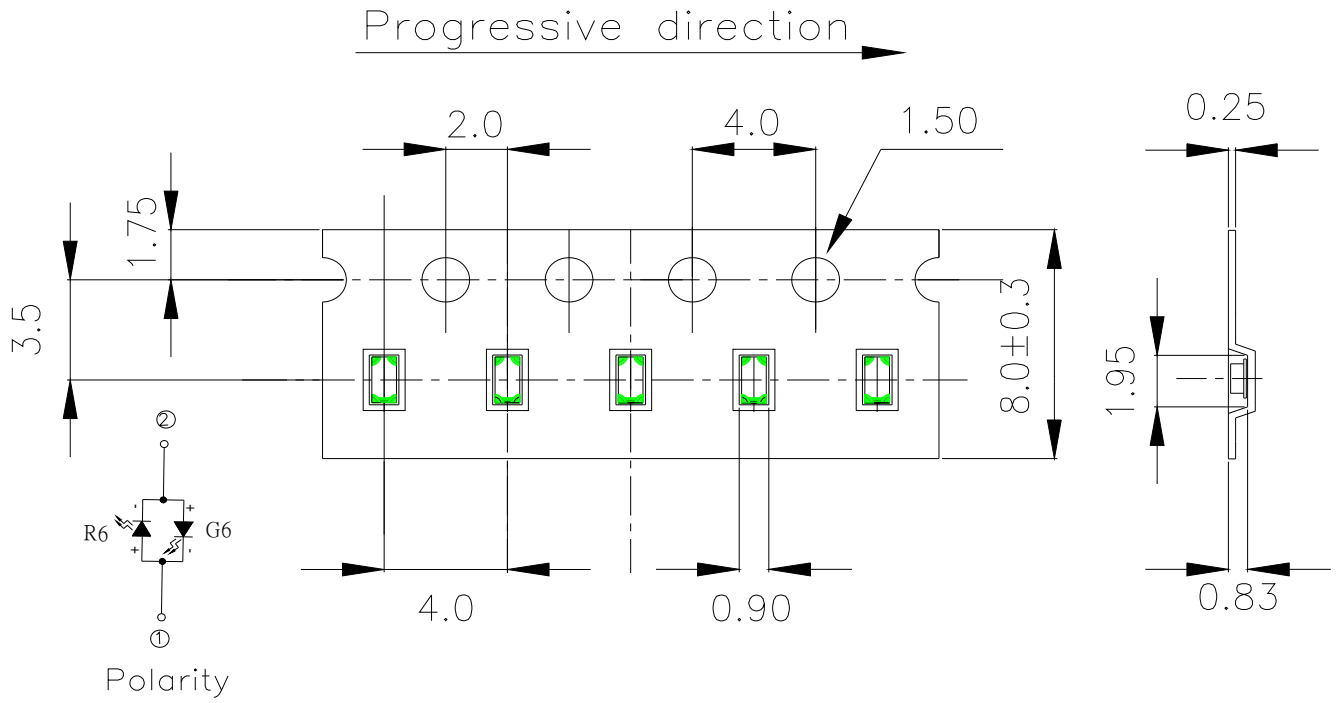

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm


Moisture Resistant Packaging

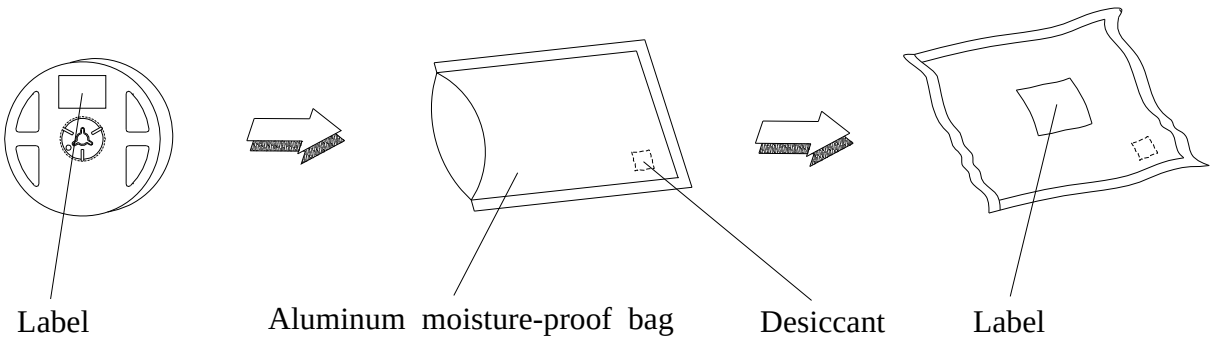

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1


Precautions For Use

1. Over-current-proof
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
2. Storage
2.1 Do not open moisture proof bag before the products are ready to use.
2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less.
If unused LEDs remain, it should be stored in moisture proof packages.
2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
Baking treatment : 60±5℃ for 24 hours.
3. Soldering Condition
3.1 Pb-free solder temperature profile

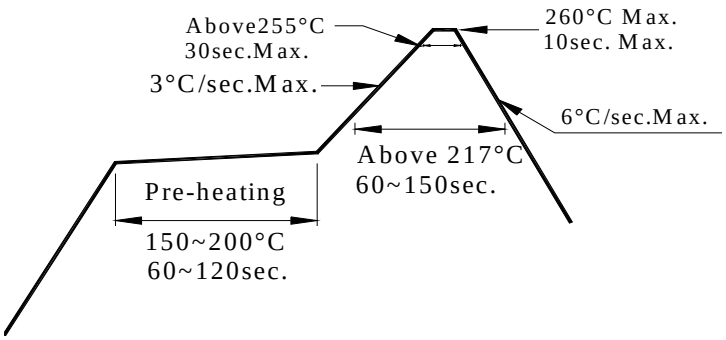

3.2 Reflow soldering should not be done more than two times.
3.3 When soldering, do not put stress on the LEDs during heating.
3.4 After soldering, do not warp the circuit board.
4.Soldering Iron
Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing
Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

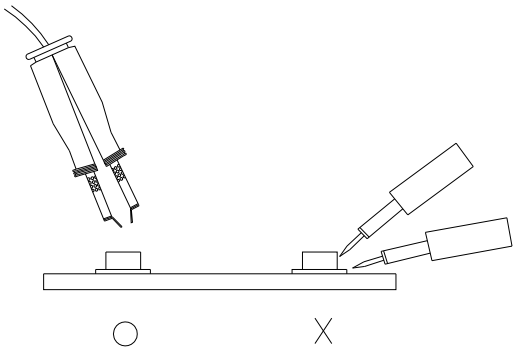

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight Americas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : 15-Aug-2008. Issue No: 1 Rev.1