


Gas Discharge Tube: GD8 Series

2-Electrode $\Phi 8.0 \times T6$ mm Type



■ Features


1. RoHS compliant
2. Rugged ceramic-metal construction
3. Available with or without leads
4. DC spark-over voltage: 70~800V
5. Low capacitance
6. Agency recognition: UL/cUL

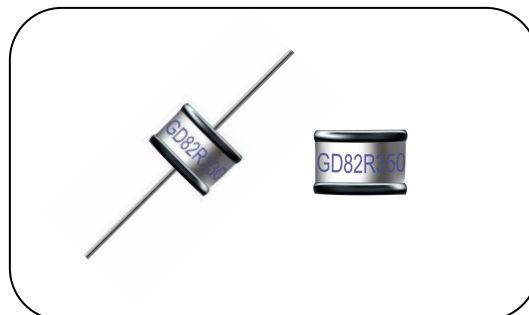

■ Recommended Applications

1. Data transmission lines
2. Communication lines
3. CATV system
4. Power distribution system
5. Power supplier
6. Test equipment
7. Instrumentation circuits

■ Part Number Code

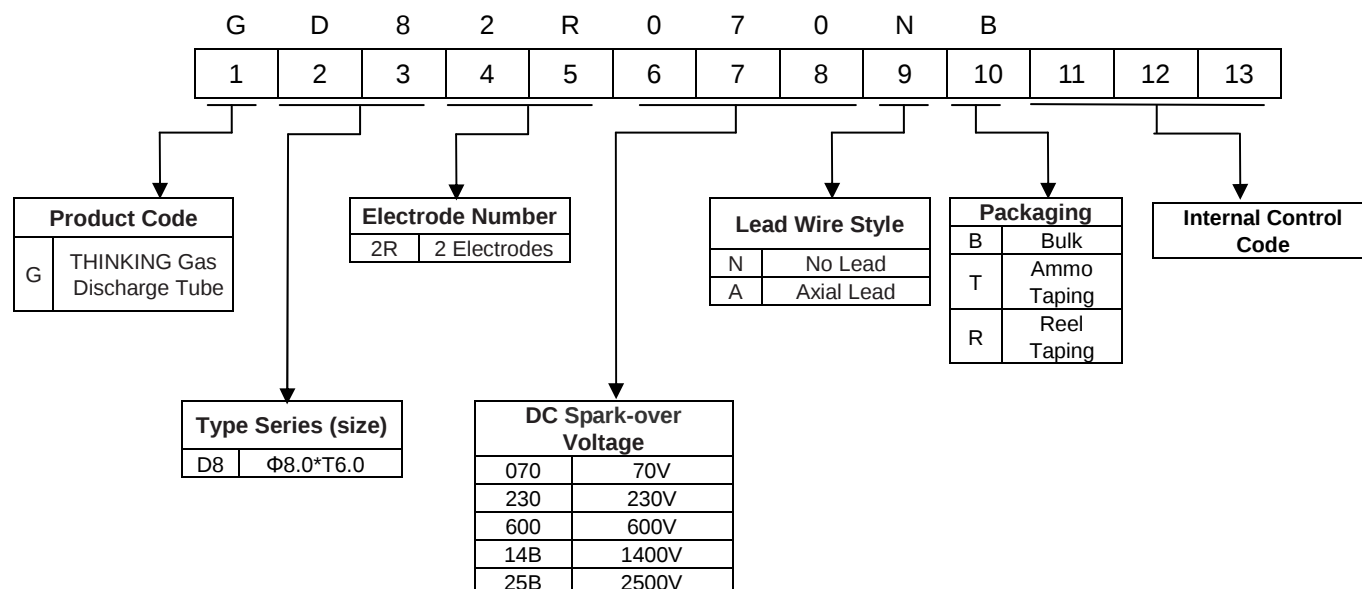

Gas Discharge Tube: GD8 Series

2-Electrode $\Phi 8.0 \times T6$ mm Type



■ Characteristics

Type	DC Breakdown Voltage	Max. Impulse Breakdown Voltage		Impulse Discharge Current (8/20μs)		Impulse Life (10/1000μs)	Normal Alternating Discharge Current		DC Holdover Voltage	Minimum Insulation Resistance	Maximum Capacitance (1MHz)	Safety approvals	
	100V/s	100V/μs	1KV/μs	1 time	10 times	100A	50Hz, 1Sec	Single 9 Cycles	<150ms				
	(V)	(V)	(V)	(KA)		Times	(A)		(V)			(GΩ)	(pF)
GD82R070□□	70±20%	500	600	15	10	500	5	65	52	10	1.5		√
GD82R075□□	75±20%	500	600						52				√
GD82R090□□	90±20%	500	600						52				√
GD82R120□□	120±15%	500	700						52				√
GD82R130□□	130±15%	500	700						52				√
GD82R145□□	145±15%	500	700						52				√
GD82R180□□	180±15%	500	700						80				√
GD82R230□□	230±15%	500	700						80				√
GD82R250□□	250±15%	500	700						80				√
GD82R300□□	300±15%	700	900						150				√
GD82R350□□	350±15%	700	900						150				√
GD82R400□□	400±15%	800	1000						150				√
GD82R470□□	470±15%	900	1000						150				√
GD82R600□□	600±20%	1100	1400			√	√						
GD82R800□□	800±20%	1300	1700	10	5			150			√	√	

Note1: The first □ is the style of lead wire, and the second □ is packaging.

Note2: UL / 497B→ File No. E245070, UL / 1449 3rd→ File No.E314979

Note 3: Insulation resistance test conditions:

DC Breakdown Voltage	DC Measuring Voltage
70-90V	50V
120-400V	100V
470-800V	250V


Gas Discharge Tube: GD8 Series

2-Electrode $\Phi 8.0 \times T6$ mm Type



■ Dimensions

□ = A (Axial lead type)

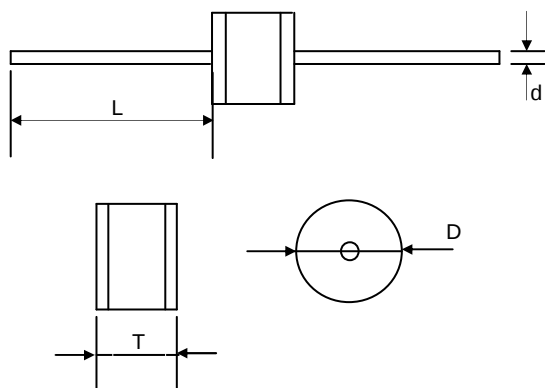


Unit: mm

Item	Dimensions	
	Spec.	Tolerance
D	8.0	+0.3/-0.5
T	6.0	+0.3/-0.5
L	20	Min.
d*	0.8	±0.05

*: d = 1.0mm is available.


□ = N (No lead type)

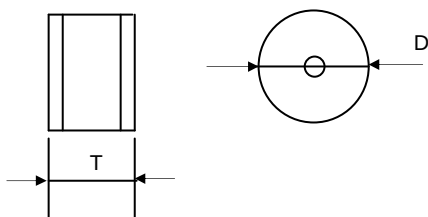


Unit: mm

Item	Dimensions	
	Spec.	Tolerance
D	8.0	+0.3/-0.5
T	6.0	+0.3/-0.5

■ Marking

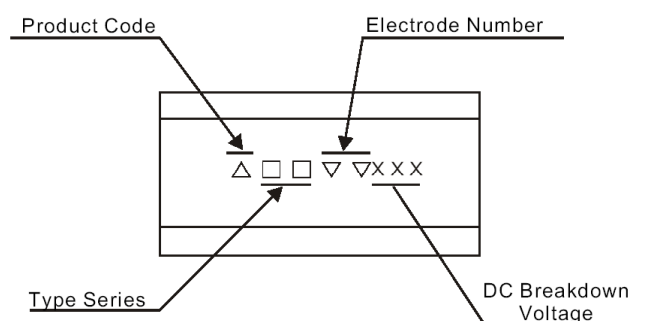

Example

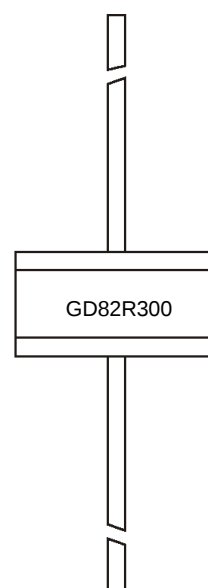




Gas Discharge Tube: GD8 Series

2-Electrode $\Phi 8.0 \times T6$ mm Type




■ Packaging

● Bulk

Plastic Tray (263×144×6mm)	Inner Box (270×145×50mm)	Outside Box (320×305×280mm)
		
100 PCS/Plastic tray	500 PCS/box	5000 PCS/carton


● Taping

For 2-electrode Axial Lead GDT

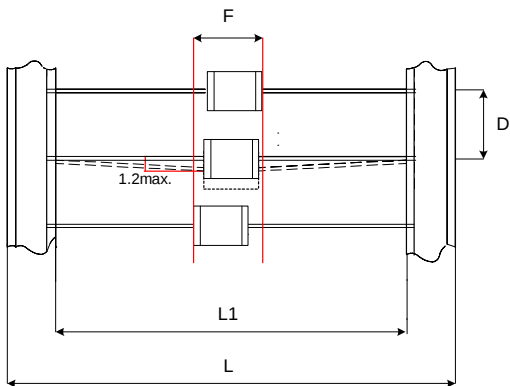

Unit: mm

Item	Dimensions	
	Spec.	Tolerance
L1	52	±2
L	64	±3
D	10	±0.5
F	T of Gas Tube + 1.4	Max.

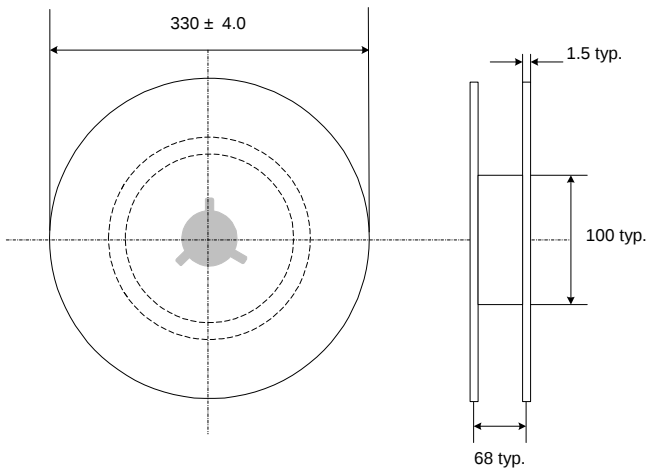

Gas Discharge Tube: GD8 Series

2-Electrode $\Phi 8.0 \times T6$ mm Type



■ Storage Conditions of GDT

(I) Storage conditions:

1. Storage temperature: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$.
2. Relative humidity: $\leq 75\% \text{RH}$.
3. Gas discharge tube must be kept away from sunlight and stored in a non-corrosive atmosphere.

(II) Shelf life: 1 year