

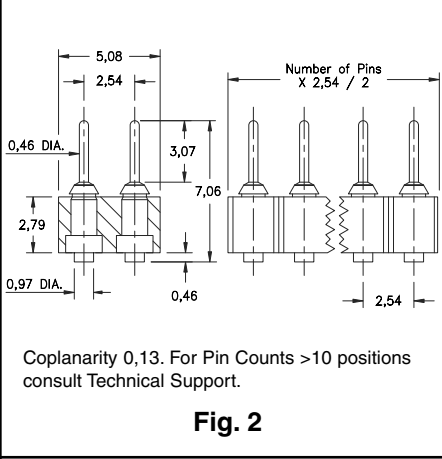


- Series 329 and 429 pin interconnects offer vertical Surface Mount MM #2956-X solder tails. See page 185 for details.
- Series 340 Surface mount sockets use MM #4078 pins. Series 414 sockets use MM #1434 pins. See pages 133 and 138 for details.
- Series 340 and 414 receptacles use Hi-Rel, 4-finger BeCu #30 contacts rated at 3 amps. Receptacles accept 0,38 - 0,64 diameter pins. See page 218 for details.
- Insulators are high temp. thermoplastic.

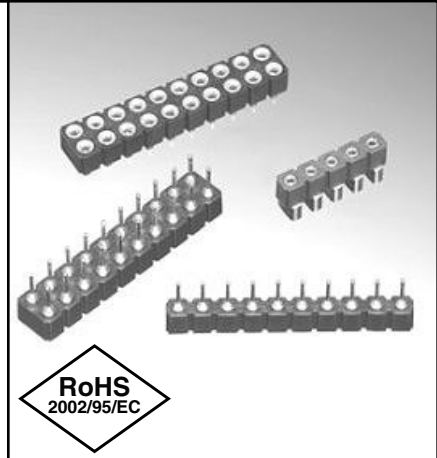


<b>Ordering Information</b>	
<b>Fig. 1</b>	<b>Series 329...560 Surface Mount Pin Header</b> 329-10-1 _ _ -00-560000 Specify # of pins      →      02-64
	<b>Series 429...560 Surface Mount Pin Header</b> 429-10-2 _ _ -00-560000 Specify # of pins      →      04-72

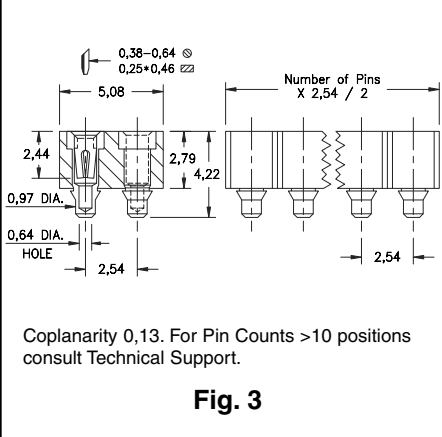

*For Electrical, Mechanical & Environmental Data, See pg. 4*

*For RoHS compliance select ◇ plating code.*

PLATING CODE =	10 ◇			
Pin Plating	0,25µm Au			

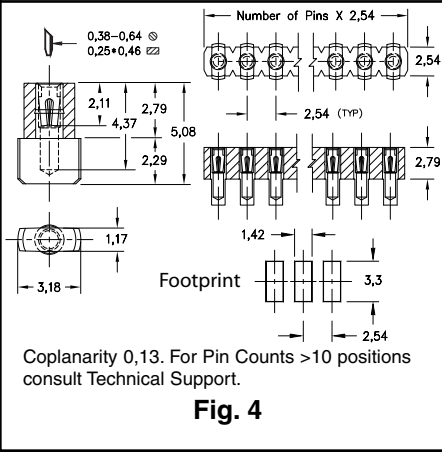

*For Electrical, Mechanical & Environmental Data, See pg. 4*

*For RoHS compliance select ◇ plating code.*

<b>Fig. 3</b>	<b>Series 414...117 Surface Mount Socket</b> 414-43-2 _ _ -41-117000 Specify # of pins      →      04-72
	<b>Series 340...780 Surface Mount Socket</b> 340-43-1 _ _ -30-780100 Specify # of pins      →      02-64

PLATING CODE =					43 ◇
Sleeve (Pin)					5,08µm Sn
Contact (Clip)					0,76µm Au