LUMILEDS

ILLUMINATION

For NEW designs consider this replacement product:

- LUXEON 3014

LUXEON 4014

A compact footprint delivering high efficacy and just the right amount of light



LUXEON 4014 is a 2.9V low-power product, the first of its kind from Lumileds. It is a compact QFN 4.0mm x 1.4mm x 0.7mm package that delivers the Quality of Light needed for indoor lighting applications. LUXEON 4014 offers an ideal solution when uniformity and a smooth lighting appearance are critical in luminaire designs.

NO LONGER ORDERABLE

FEATURES AND BENEFITS

- Rectangular QFN package design increases uniformity
- Superior heat dissipation enables cost effective design
- Unique phosphor technology enables high efficacy
- 1/6th ANSI color binning for tight color control
- Superior heat dissipation enables cost effective thermal design

PRIMARY APPLICATIONS

- Indoor Area Lighting

 ©2016 Lumileds Holding B.V. All rights reserved.

Table of Contents

General Information 2

Product Nomenclature 2

Average Lumen Maintenance Characteristics 2

Environmental Compliance 2

Product Performance and Characterization Guide 3

Electrical Characteristics 3

Absolute Maximum Ratings 4

JEDEC Moisture Sensitivity 4

Reflow Soldering Characteristics 5

Material Information & Mechanical Dimensions 6

Characteristic Curves 7

Typical Forward Current 9

Light Output Characteristics 10

Typical Radiation Patterns 11

Emitter Pocket Tape Packaging 12

Emitter Reel Packaging 13

Product Binning and Labeling 14

Color Bin Structure 15

NO LONGER ORDERABLE

General Information

Product Nomenclature

LUXEON 4014 is tested and binned at T_j = 25°C and 30mA DC.

The part number designation is explained as follows:

M X Z A – B C D D – 0 0 E E

Where:

A	—	designates minimum CRI (value 8 for 80, 9 for 90)
B	—	designates radiation pattern (value P for Lambertian)
C	—	designates color (W for White)
DD	—	designates nominal CCT (27 for 2700K, 30 for 3000K, 35 for 3500K, 40 for 4000K and 50 for 5000K)
EEEE	—	designates additional part numbers

Therefore 4000K, 80CRI LUXEON 4014 product will be:

M X Z 8 – P W 4 0 – 0 0 0 0

Average Lumen Maintenance Characteristics

The LUXEON 4014 is being tested in accordance with LM-80 standards. Please contact your Lumileds TSM or sales person for more detailed information.

Environmental Compliance

Lumileds is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON 4014 is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS and REACH directives. Lumileds will not intentionally add the following restricted material to the LUXEON 4014: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

NO LONGER ORDERABLE

Product Performance and Characterization Guide

Typical Product Characteristics at 30mA and 60mA

Table 1. Performance Characteristics at T_j = 25˚C, I_f

Nominal CCT	Part Number	Minimum CRI	Luminous Flux @ 30mA, 25°C		Luminous Flux @ 60mA, 25°C		V_f at 30mA
			Minimum (lm)	Typical (lm)	Minimum (lm)	Typical (lm)	Typical
5000K	MXZ7-PW50	70	10.0	13.0	18	23	2.9
5700K	MXZ7-PW57	70	10.0	13.0	18	23	2.9
6500K	MXZ7-PW65	70	10.0	13.0	18	23	2.9
2200K	MXZ8-PW22	80	8.5	9.7	14	17	2.9
2500K	MXZ8-PW25	80	8.5	10.2	14	17	2.9
2700K	MXZ8-PW27	80	8.5	10.5	15	18	2.9
3000K	MXZ8-PW30	80	8.5	11.0	15	20	2.9
3500K	MXZ8-PW35	80	9.0	11.0	16	20	2.9
4000K	MXZ8-PW40	80	10.0	12.0	18	22	2.9
5000K	MXZ8-PW50	80	10.0	12.0	18	22	2.9
5700K	MXZ8-PW57	80	9.5	11.5	17	20	2.9
6500K	MXZ8-PW65	80	9.5	11.5	17	20	2.9
2700K	MXZ9-PW27	90	8.5	9.0	14	17	2.9
3000K	MXZ9-PW30	90	8.5	9.3	14	17	2.9
4000K	MXZ9-PW40	90 typ.	10.0	11.1	17	20	2.9
5000K	MXZ9-PW50	90 typ.	10.0	11.1	17	20	2.9

Notes for Table 1:
1. Lumileds maintains a tolerance of ±7.5% on luminous flux, ±2 on CRI.
2. Production parts are binned at 30mA, 25°C.
3. Performance at 60mA, 25°C is for reference only.

NO LONGER ORDERABLE

Electrical Characteristics

Electrical Characteristics of Low-Power LEDs Solder Pad Temperature = 25°C, Test Current = 30mA

Table 2.

Part Numbers	Forward Voltage V_f [1] (V)			Typ. Temperature Coefficient of Forward Voltage [2] (mV/°C) $\Delta V_f / \Delta T_J$	Typical Thermal Resistance Junction to Solder Pad (°C/W) $R\theta_{J-C}$
	Minimum	Typical	Maximum		
MXZx-PWXX	2.7	2.9	3.2	-1.6	45

Notes for Table 2:
1. Lumileds maintains a tolerance of ± 0.10V on forward voltage measurements.
2. Measured between T_j = 25°C and T_j = 110°C.

 ©2016 Lumileds Holding B.V. All rights reserved.

Absolute Maximum Ratings

Table 3. Operating Condition and Ratings

Parameter	Maximum Performance
DC Forward Current [1]	90mA
Peak Pulsed Forward Current [2]	100mA
Soldering Temperature	260°C
Allowable Reflow Cycles	3
ESD Sensitivity	≤ 2000V Human Body Model (HBM) Class 2 JEDEC JS-001-2012 400V Machine Model (MM) Class C JESD22-A115C
Storage Temperature	-40°C - 85°C
LED Junction Temperature	125°C
Operating Case Temperature	85°C
Reverse Voltage (Vr) [3] [4]	-5V

Notes for Table 3:

1. Ripple current with a frequency of 50-150 Hz is allowed, as long as the average of the current waveform is below 80mA, and the maximum of the current waveform is lower than 100mA.
2. At 10% duty cycle and pulse width 10mS.
3. LUXEON low-power LEDs are not designed to be driven in reverse bias.
4. At maximum reverse current of 10 µA.


JEDEC Moisture Sensitivity

Table 4.

Level	Floor Life		Soak Requirements	
			Standard	
	Time	Conditions	Time	Conditions
2	1 year	≤ 30°C / 60% RH	168 Hrs. + 5 / -0 Hrs.	≤ 85°C / 60% RH

NO LONGER ORDERABLE

Reflow Soldering Characteristics

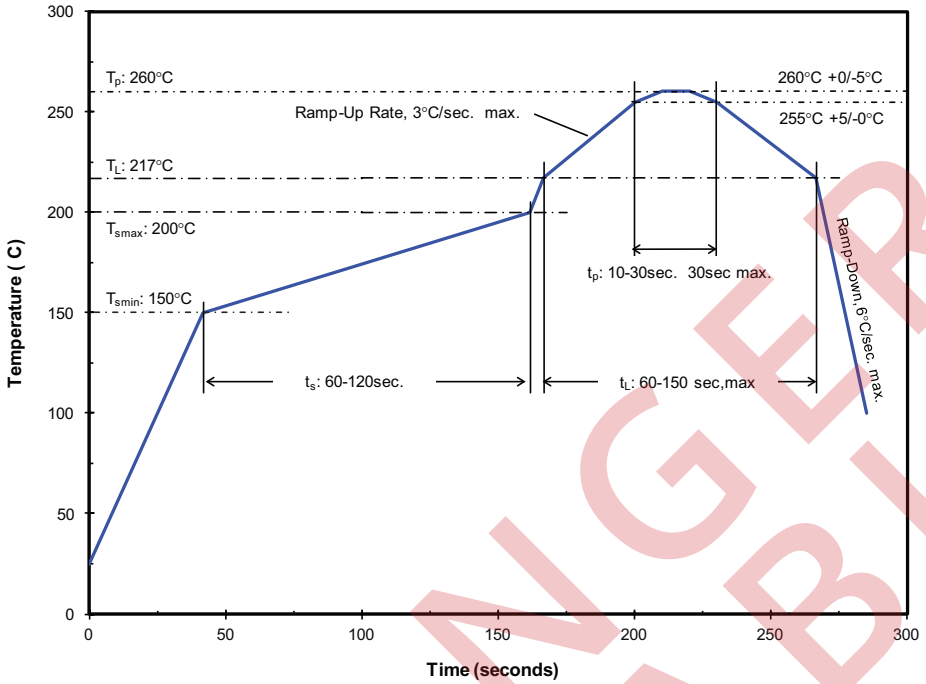

Temperature Profile for Table 5.

Table 5. Reflow Profile in Accordance with J-Std-020D.

Profile Feature	Lead Free Assembly
Preheat/Soak : Temperature Min (T_{smin}) Temperature Max (T_{smax}) Maximum Time (t_s) from T_{smin} to T_{smax}	 150°C 200°C 120 seconds
Ramp-up Rate (T_L to T_p)	3°C / second
Liquidous Temperature (T_L)	217°C
Maximum Time (t_L) Maintained above T_L	150 seconds
Maximum Peak Package Body Temperature (T_p)	260°C
Time (t_p) within 5°C of the specified temperature (T_c)	10-30 seconds
Maximum Ramp-Down Rate (T_p to T_L)	6°C / second
Maximum Time 25°C to Peak Temperature	8 minutes

Note for Table 5:

1. All temperatures refer to the application Printed Circuit Board (PCB), measured on the surface adjacent to the package body.

NO LONGER ORDERABLE

Material Information & Mechanical Dimensions

MXZx-PWxx

Table 6. Material Information

Material/Component	Specification
Lead Frame Base:	Copper Alloy
Reflector Plating:	Ni/Ag
Electrode Plating:	Ni/Ag
Package Body:	High Temperature Thermal Plastic
Encapsulant:	Silicone Resin, with Phosphor
LED Chip:	InGaN

NO LONGER ORDERABLE

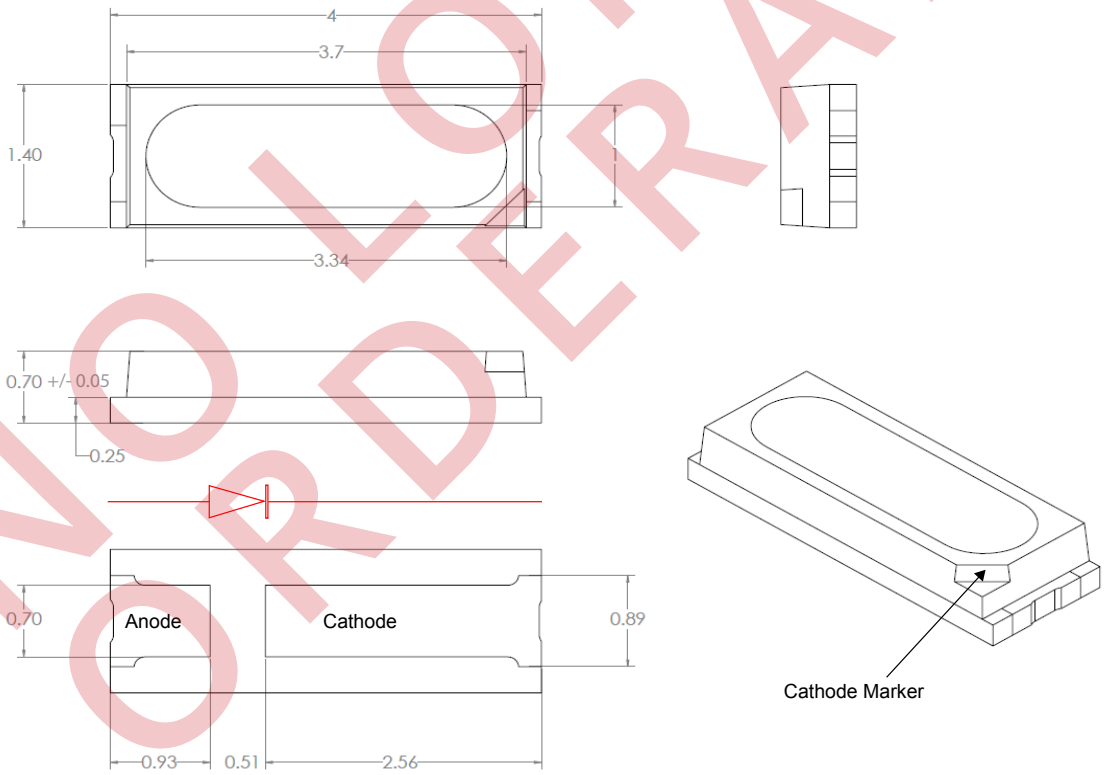


Figure 1. Package outline dimensions.

Notes for Figure 1:
1. All dimensions are in millimeters.
2. General tolerance +/- 0.10.

Characteristic Curves

Relative Spectral Distribution vs. Wavelength
Junction Temperature at 25°C; Test Current = 30mA

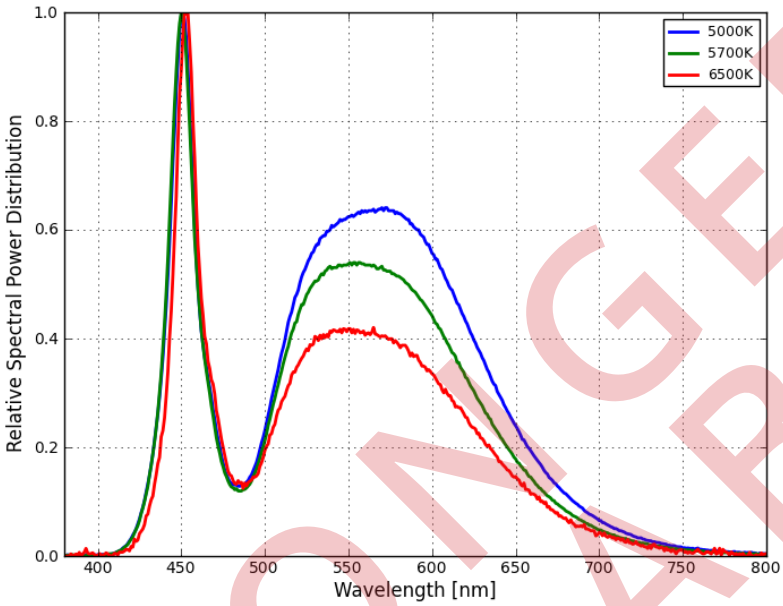


Figure 2. Emission color spectrum for MXZ7-PWxx

Relative Spectral Distribution vs. Wavelength
Junction Temperature at 25°C; Test Current = 30mA

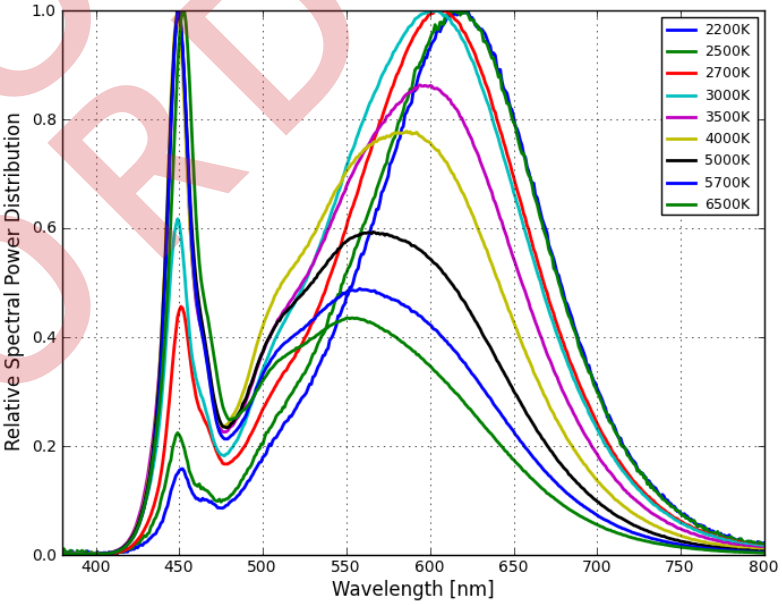


Figure 3. Emission color spectrum for MXZ8-PWxx.

NO LONGER ORDERABLE

Characteristic Curves, Continued

Relative Spectral Distribution vs. Wavelength
Junction Temperature at 25°C; Test Current = 30mA

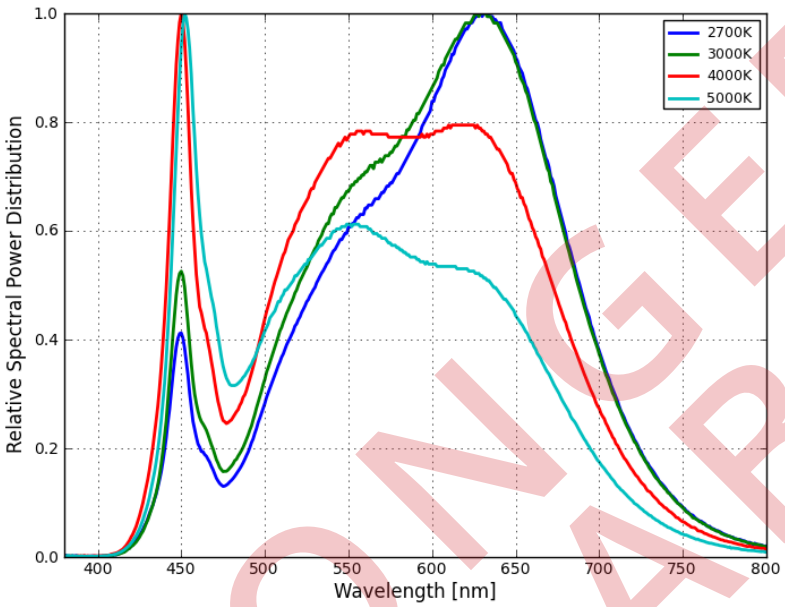


Figure 4. Emission color spectrum for MXZ9-PWxx.

Relative Light Output Characteristics over Temperature
Test Current = 30mA

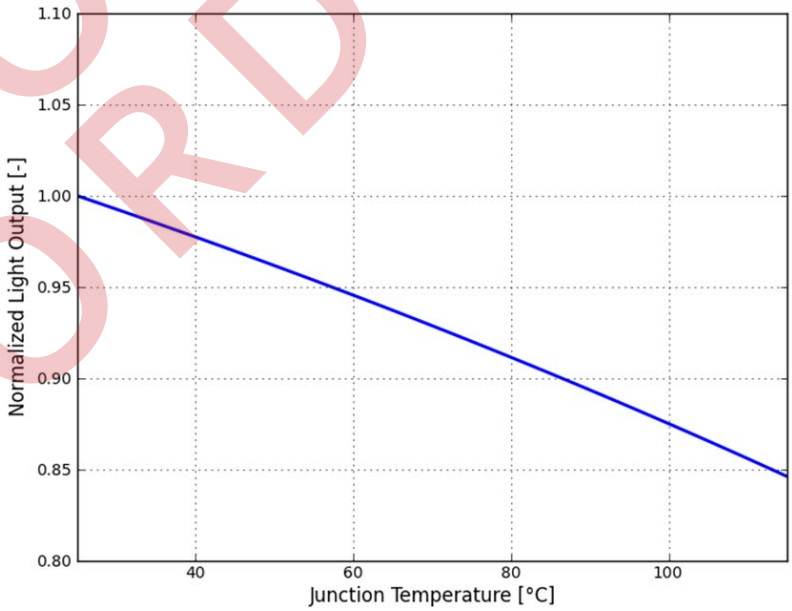


Figure 5. Relative light output vs. junction temperature for MXZx-PWxx.

NO LONGER ORDERABLE

Typical Forward Current

Junction Temperature at 25°C

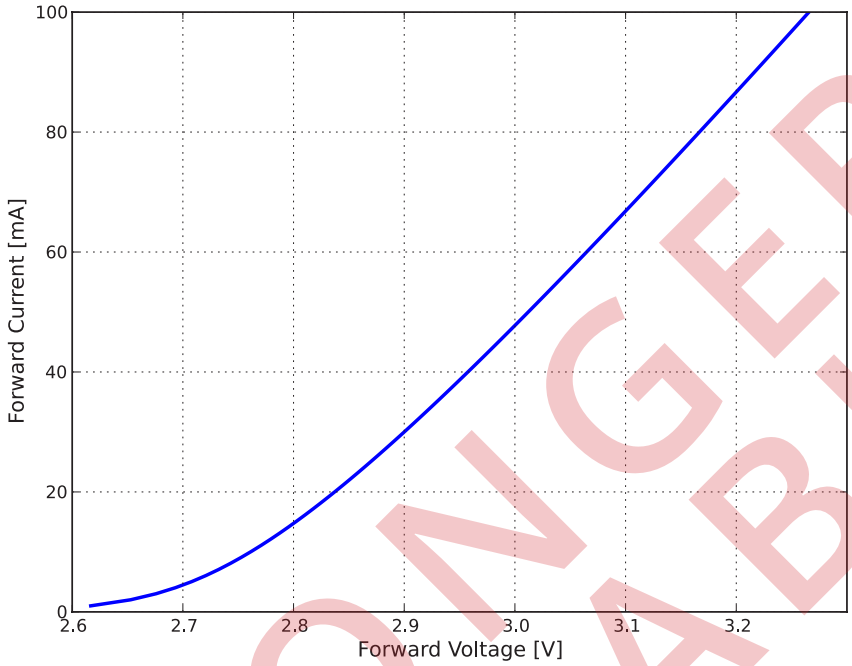


Figure 6. Forward current vs. forward voltage for MXZx-PWxx.

NO LONGER ORDERABLE

Light Output Characteristics

Relative Light Output Characteristics over Forward Current Junction Temperature at 25°C

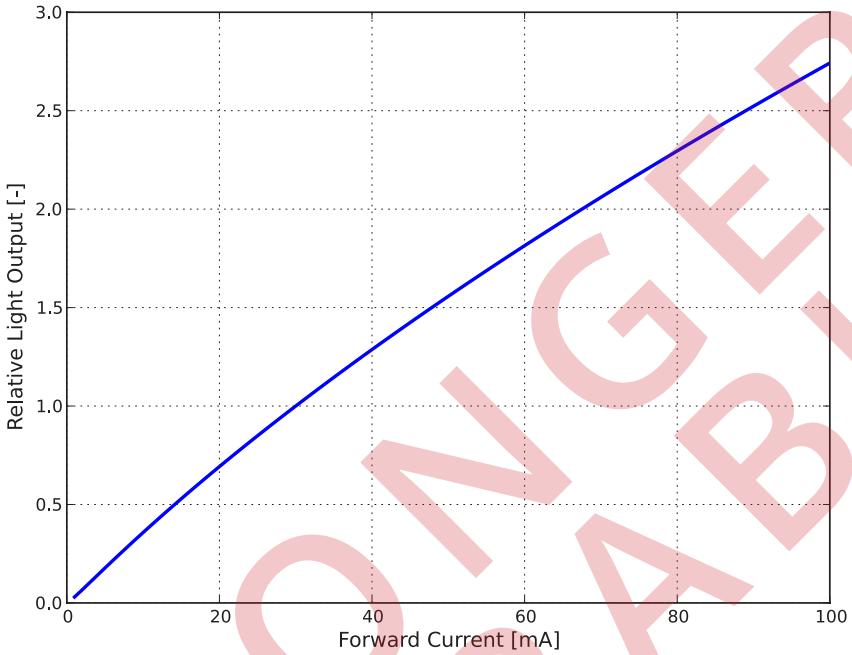


Figure 7. Light output vs. forward current for MXZx-PWxx.

Typical Relative Efficiency vs. Forward Current Junction Temperature at 25°C

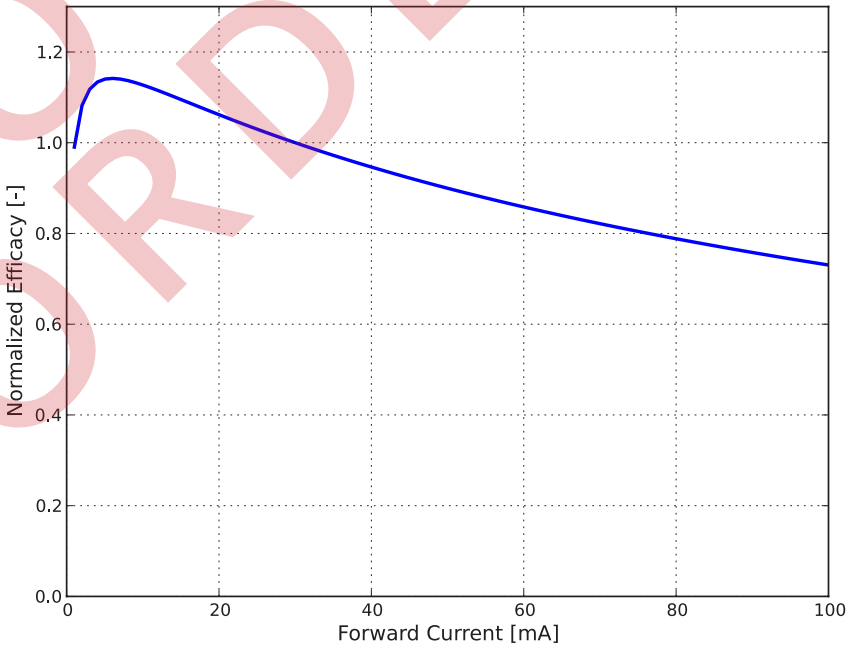


Figure 8. Typical relative efficiency vs. forward current for MXZx-PWxx.

NO LONGER ORDERABLE

Typical Radiation Patterns

Junction Temperature at 25°C

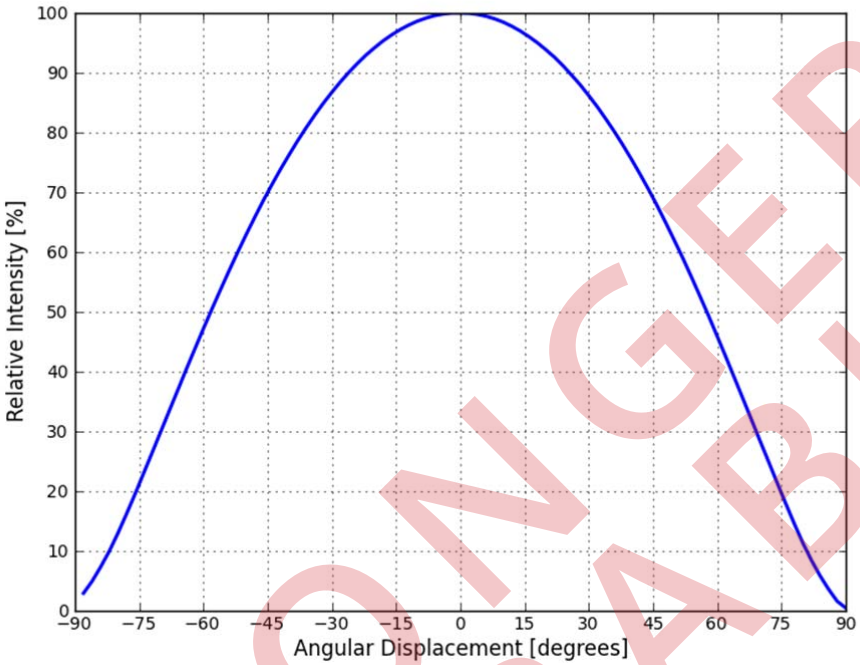


Figure 9. Radiation pattern for MXZx-PWxx.

Polar Radiation Pattern, Junction Temperature at 25°C

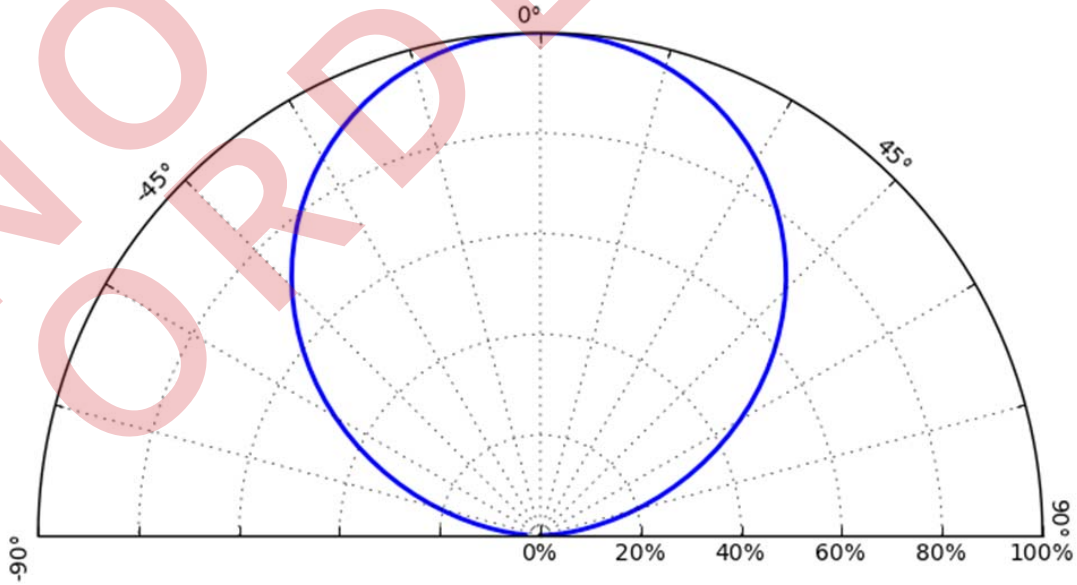


Figure 10. Radiation pattern in polar for MXZx-PWxx.

NO LONGER ORDERABLE

Emitter Pocket Tape Packaging

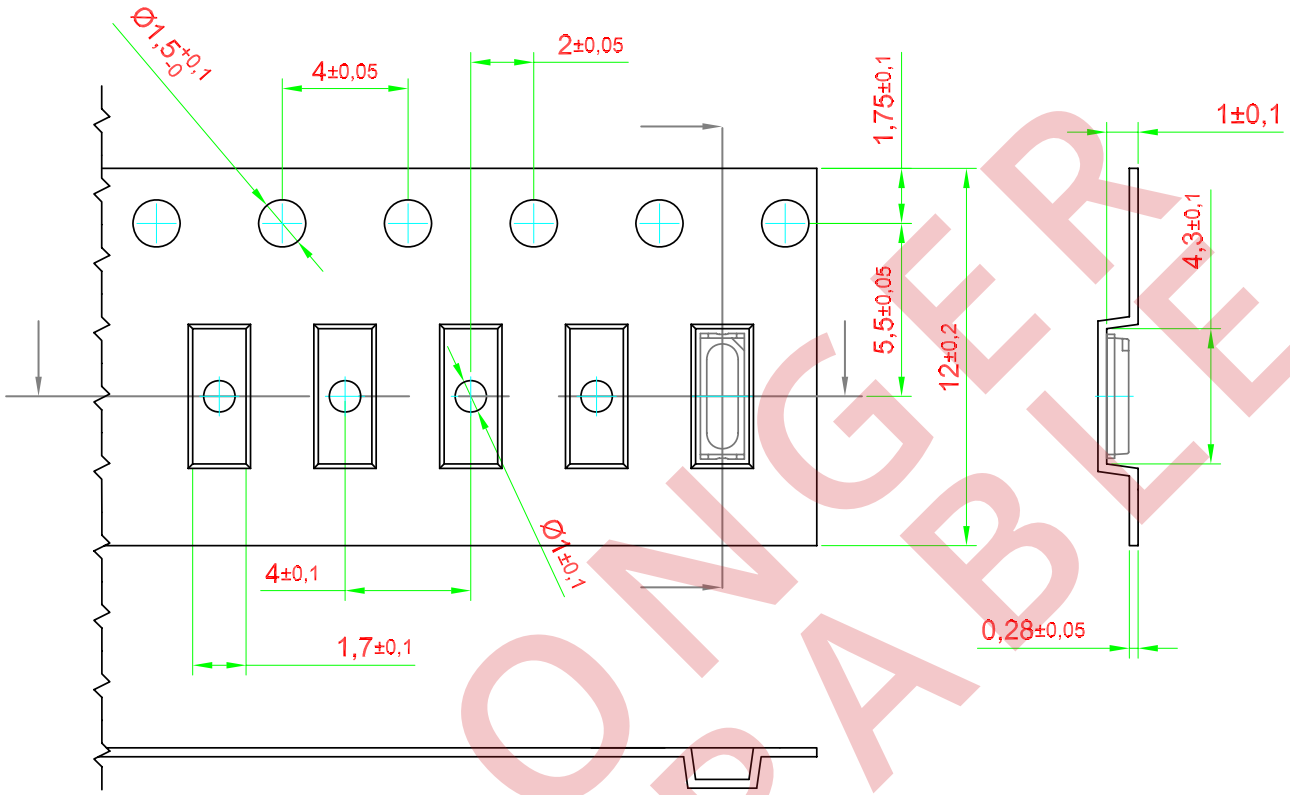


Figure 11. Emitter pocket tape packaging.

Notes for Figure 11:
1. All dimensions are in millimeters.
2. Empty component pockets sealed with top cover tape.
3. The maximum number of consecutive missing LEDs is two.

NO LONGER ORDERABLE

Emitter Reel Packaging

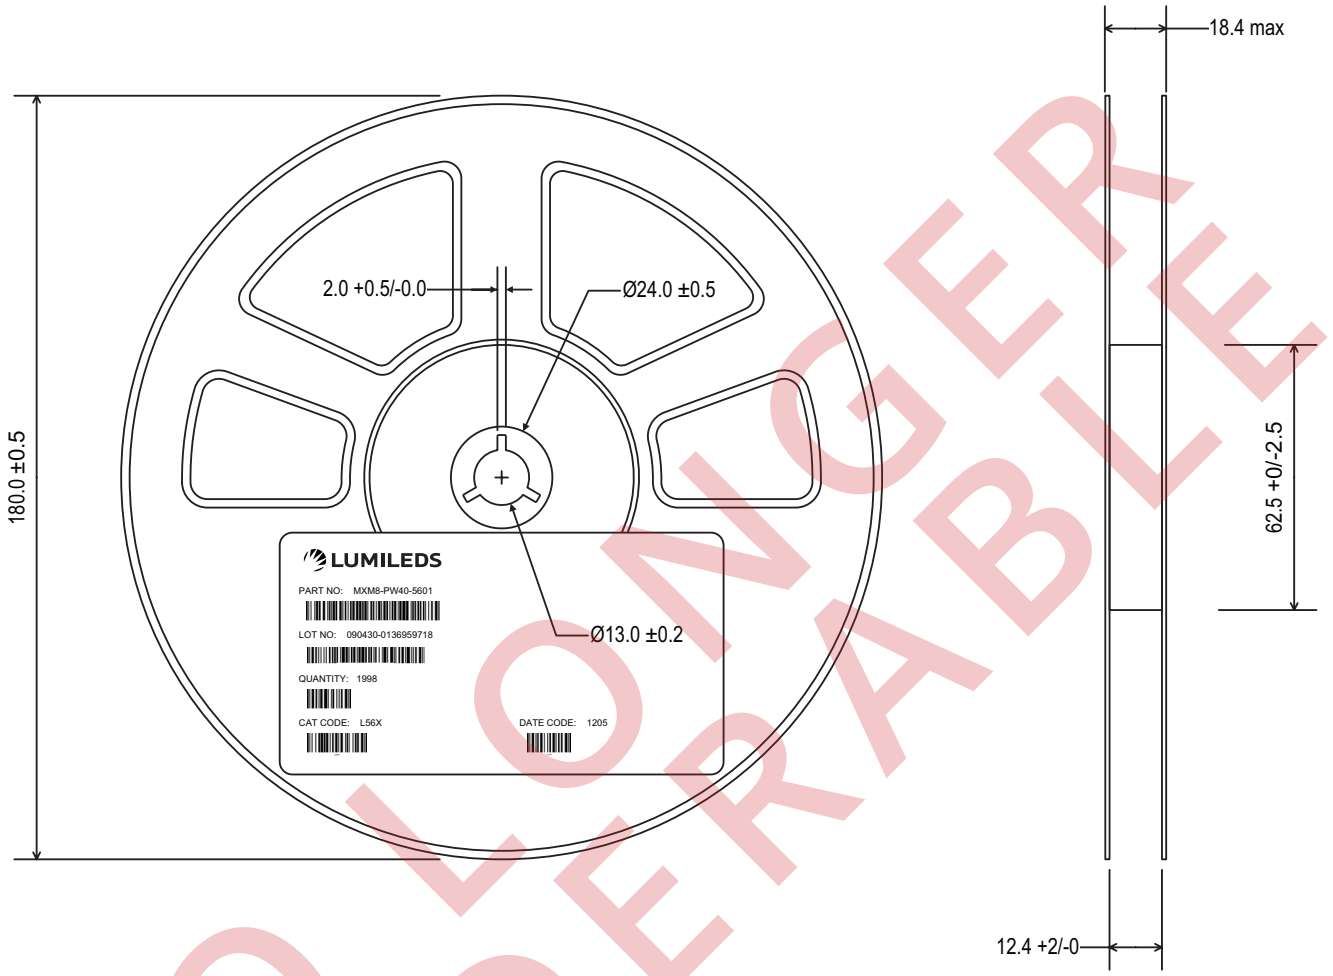


Figure 12. Emitter reel packaging.

Notes for Figure 12:
1. All dimentions are in millimeters.
2. Empty component pockets sealed with top cover tape.
3. 7 inch reel-3000 pieces per reel.
4. Minimum packing quantity is 1000 pieces.
5. The maximum number of consecutive missing LEDs is two.
6. In accordance with EIA-481-1-B specification.

NO LONGER ORDERABLE

Product Binning and Labeling

Purpose of Product Binning

In the manufacturing of LED products, there is a distribution of performance around the typical values given in the technical data sheets. For this reason, Lumileds bins the LED components for luminous flux, color and forward voltage (V_f).

Decoding Product Bin Labeling

LUXEON 4014 emitters are labeled using a four digit alphanumeric code (CAT code) depicting the bin values for emitters packaged on a single reel. All emitters packaged within a reel are of the same 3-variable bin combination. Using these codes, it is possible to determine optimum mixing and matching of products for consistency in a given application.

Reels of 2700K, 3000K, 3500K, 4000K, 5000K, 6500K emitters are labeled with a four digit alphanumeric CAT code following the format below.

ABCD

A = Flux bin (L etc.)

B and C = Color bin (For example 93, A1, 5L or 5M)

D = V_f bin

Luminous Flux and Forward Voltage Bins

Tables 7 and 8 list the standard photometric luminous flux bins for LUXEON 4014 emitters (tested and binned at 30mA). Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all colors.

Table 7. Flux Bins

Bin Code	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
A	8.5	10.0
B	10.0	11.5
C	11.5	13.0
D	13.0	15.0
E	15.0	18.0

Tested and binned at 25°C, I_f=30mA. Tester tolerance: ±7.5%.

Table 8. V_f Bins

Bin Code	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
S	2.7	2.8
T	2.8	2.9
V	2.9	3.0
W	3.0	3.1
X	3.1	3.2

Tested and binned at 25°C, I_f=30mA. Tester tolerance: ±0.10V.

NO LONGER ORDERABLE

Color Bin Structure

MXZ8-PW22 1/6th Color Bin Structure

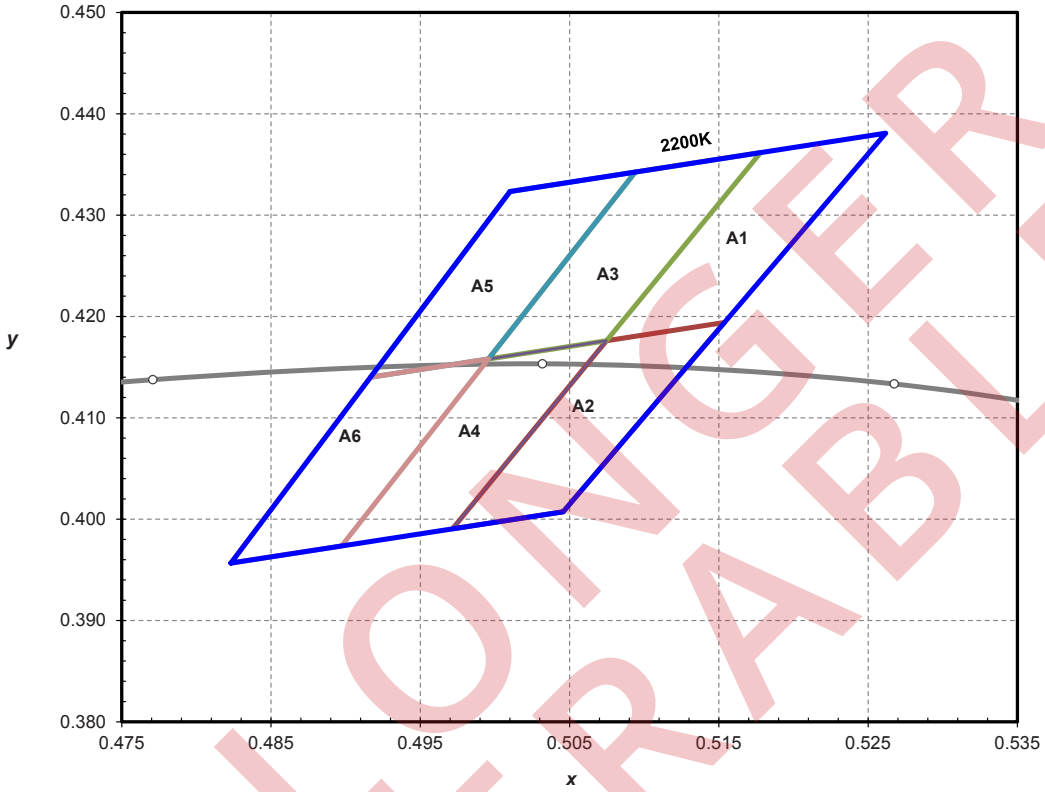


Figure 13. 2200K 1/6th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 9.

LUXEON 4014 1/6th ANSI Color Bin Coordinates for MXZ8-PW22-0000 Emitter					
Bin Code	x	y	Bin Code	x	y
A1	0.5178 0.5262 0.5154 0.5075	0.4362 0.4381 0.4194 0.4176	A4	0.4996 0.5075 0.4972 0.4897	0.4158 0.4176 0.3990 0.3974
A2	0.5075 0.5154 0.5046 0.4972	0.4176 0.4194 0.4007 0.3990	A5	0.5010 0.5094 0.4996 0.4917	0.4323 0.4343 0.4158 0.4140
A3	0.5094 0.5178 0.5075 0.4996	0.4343 0.4362 0.4176 0.4158	A6	0.4917 0.4996 0.4897 0.4823	0.4140 0.4158 0.3974 0.3957

Notes for Figure 13 and Table 9:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZ8-PW25 1/6th Color Bin Structure

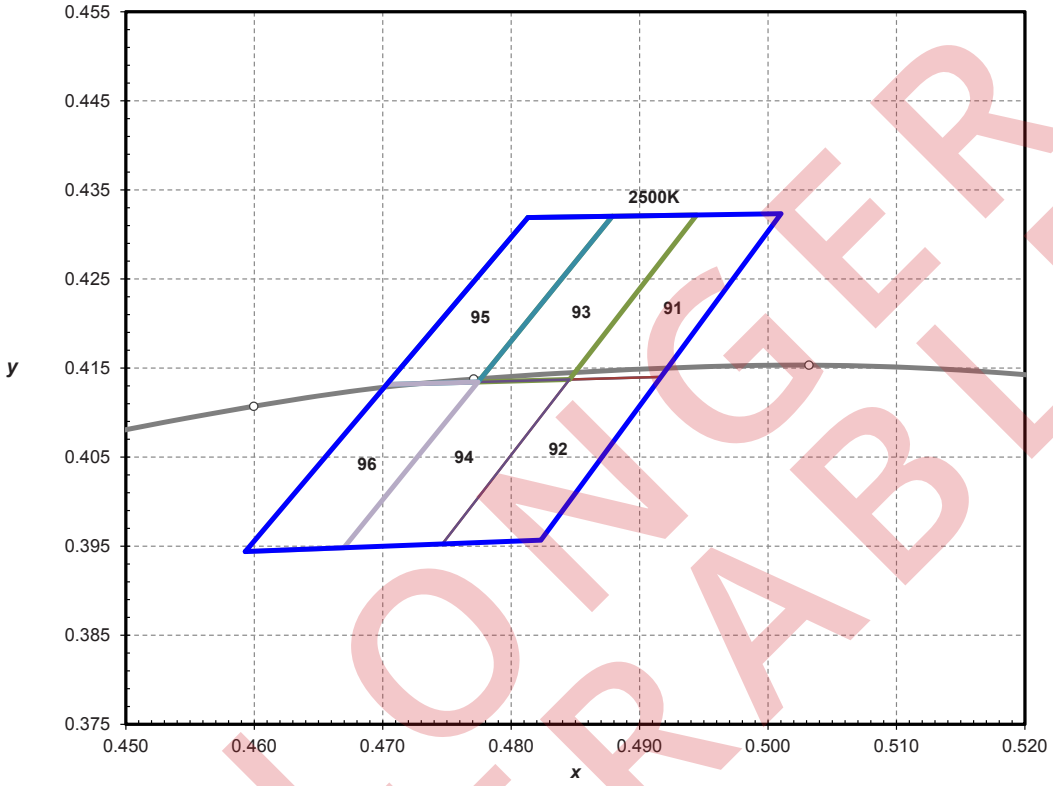


Figure 14. 2500K 1/6th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 10.

LUXEON 4014 1/6th ANSI Color Bin Coordinates for MXZ8-PW25-0000 Emitter					
Bin Code	x	y	Bin Code	x	y
91	0.4944 0.5010 0.4917 0.4845	0.4322 0.4323 0.4140 0.4137	94	0.4774 0.4845 0.4746 0.4670	0.4134 0.4137 0.3952 0.3948
92	0.4845 0.4917 0.4823 0.4746	0.4137 0.4140 0.3957 0.3952	95	0.4813 0.4879 0.4774 0.4703	0.4319 0.4320 0.4134 0.4132
93	0.4879 0.4944 0.4845 0.4774	0.4320 0.4322 0.4137 0.4134	96	0.4703 0.4774 0.4670 0.4593	0.4132 0.4134 0.3948 0.3944

Notes for Figure 14 and Table 10:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW27 1/9th Color Bin Structure

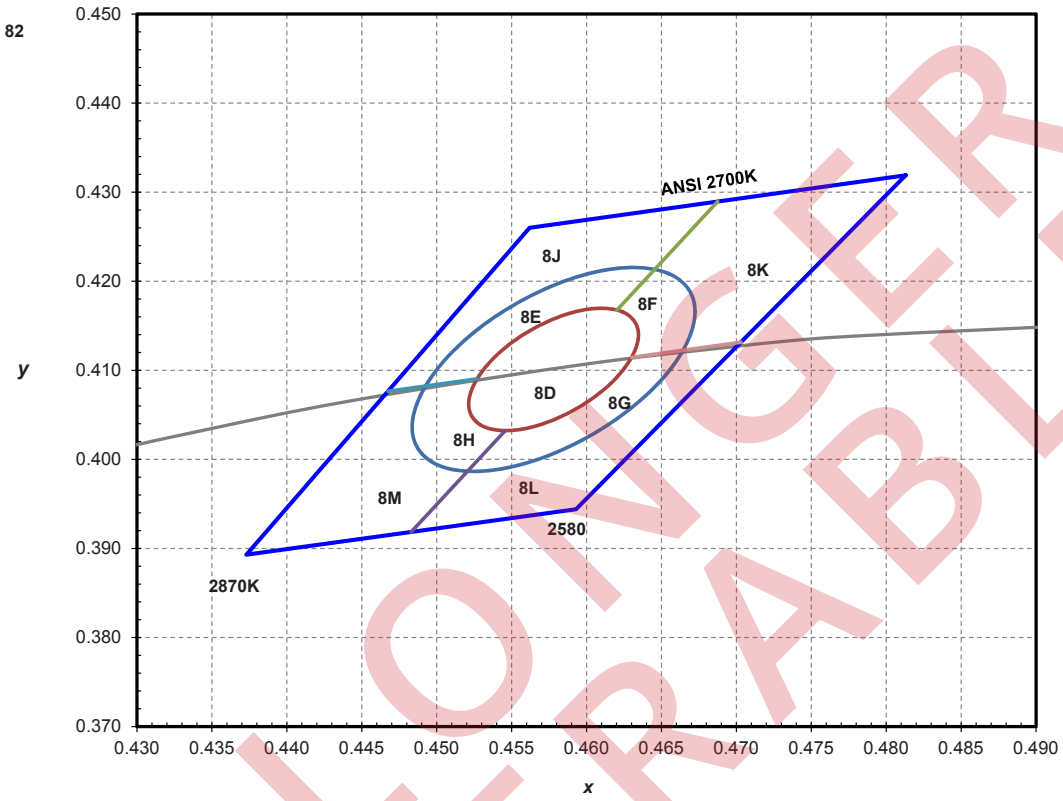


Figure 15. 2700K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 11.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
2700K	Single 3-step MacAdam ellipse	(0.4578, 0.4101)	0.00810	0.00420	53.70
2700K	Single 5-step MacAdam ellipse	(0.4578, 0.4101)	0.01350	0.00700	53.70

Notes for Figure 15 and Table 11:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW30 1/9th Color Bin Structure

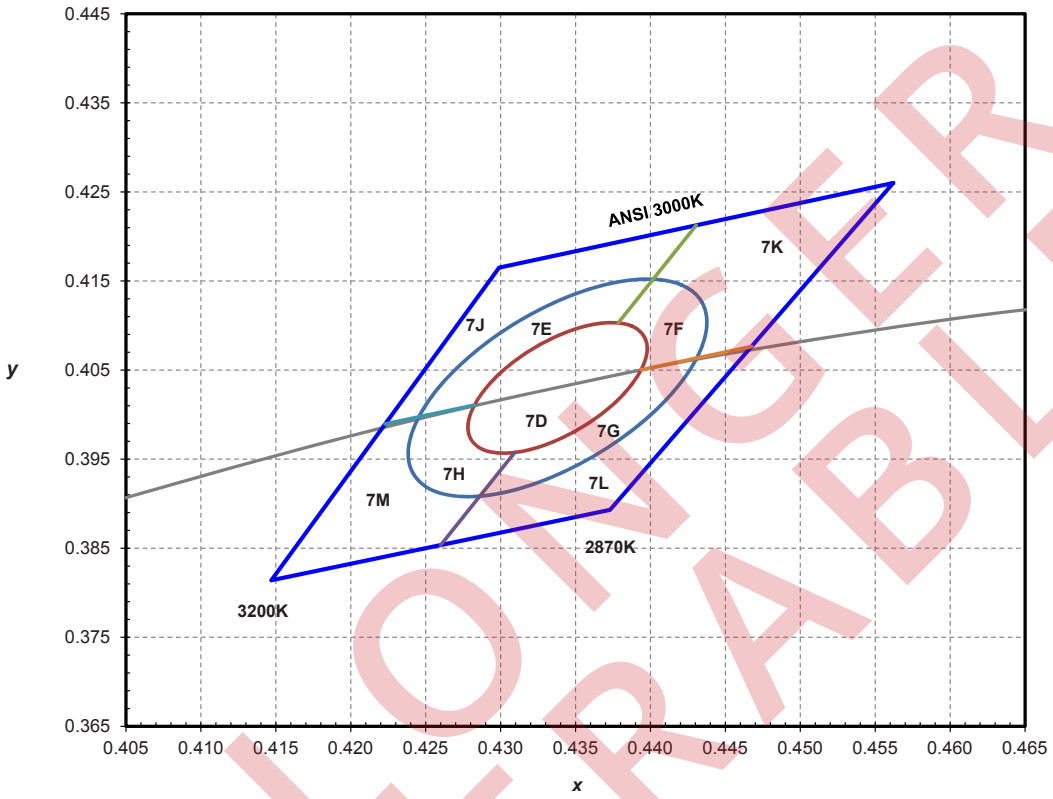


Figure 16. 3000K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 12.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
3000K	Single 3-step MacAdam ellipse	(0.4338, 0.403)	0.00834	0.00408	53.22
3000K	Single 5-step MacAdam ellipse	(0.4338, 0.403)	0.01390	0.00680	53.22

Notes for Figure 16 and Table 12:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW35 1/9th Color Bin Structure

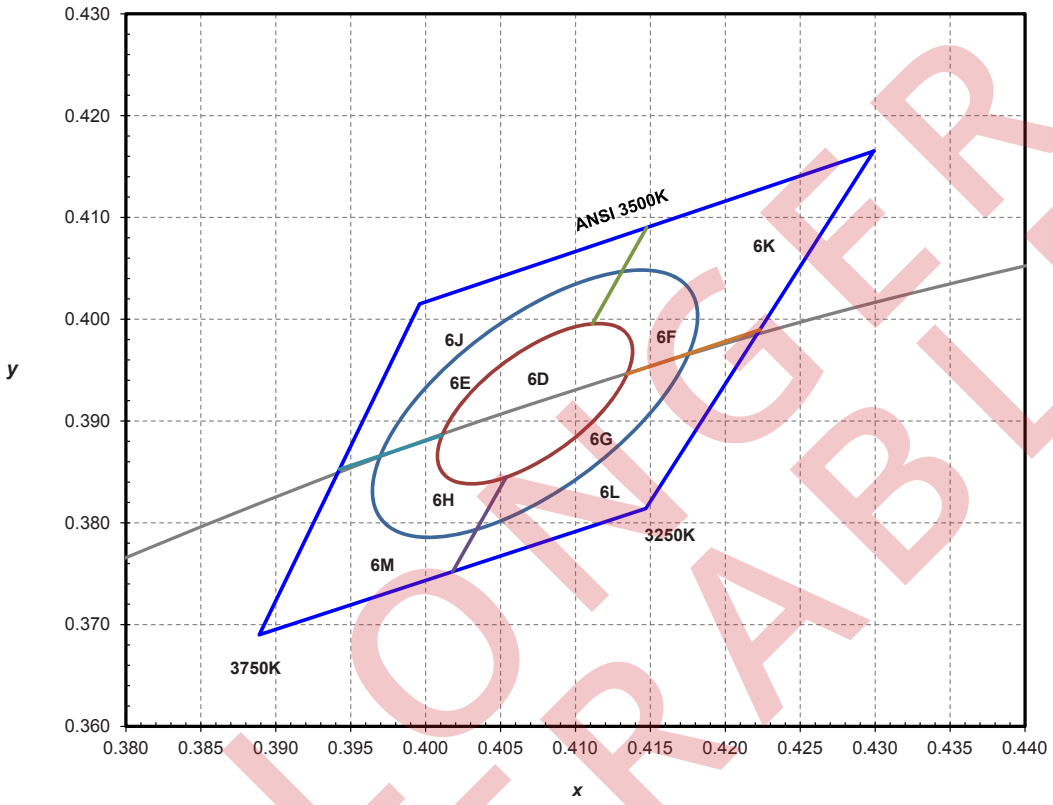


Figure 17. 3500K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 13.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
3500K	Single 3-step MacAdam ellipse	(0.4073, 0.3917)	0.00927	0.00414	54.00
3500K	Single 5-step MacAdam ellipse	(0.4073, 0.3917)	0.01545	0.00690	54.00

Notes for Figure 17 and Table 13:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW40 1/9th Color Bin Structure

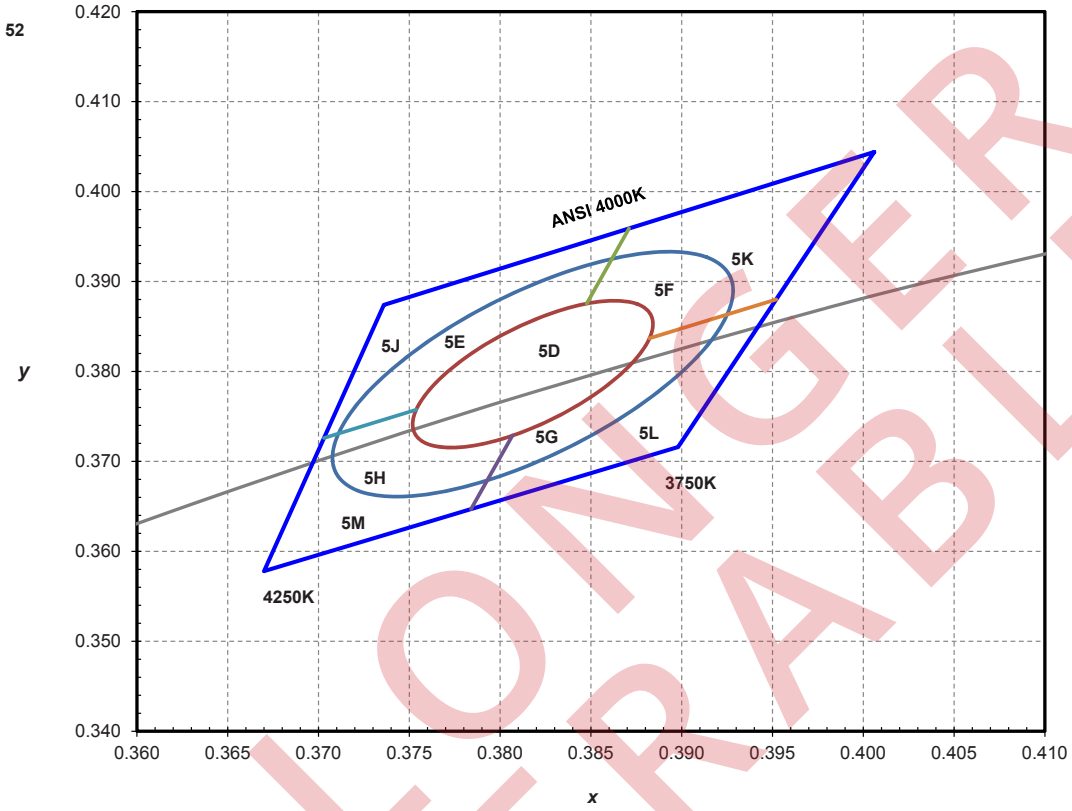


Figure 18. 4000K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 14.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
4000K	Single 3-step MacAdam ellipse	(0.3818, 0.3797)	0.00939	0.00402	53.72
4000K	Single 5-step MacAdam ellipse	(0.3818, 0.3797)	0.01565	0.00670	53.72

Notes for Figure 18 and Table 14:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW50 1/9th Color Bin Structure

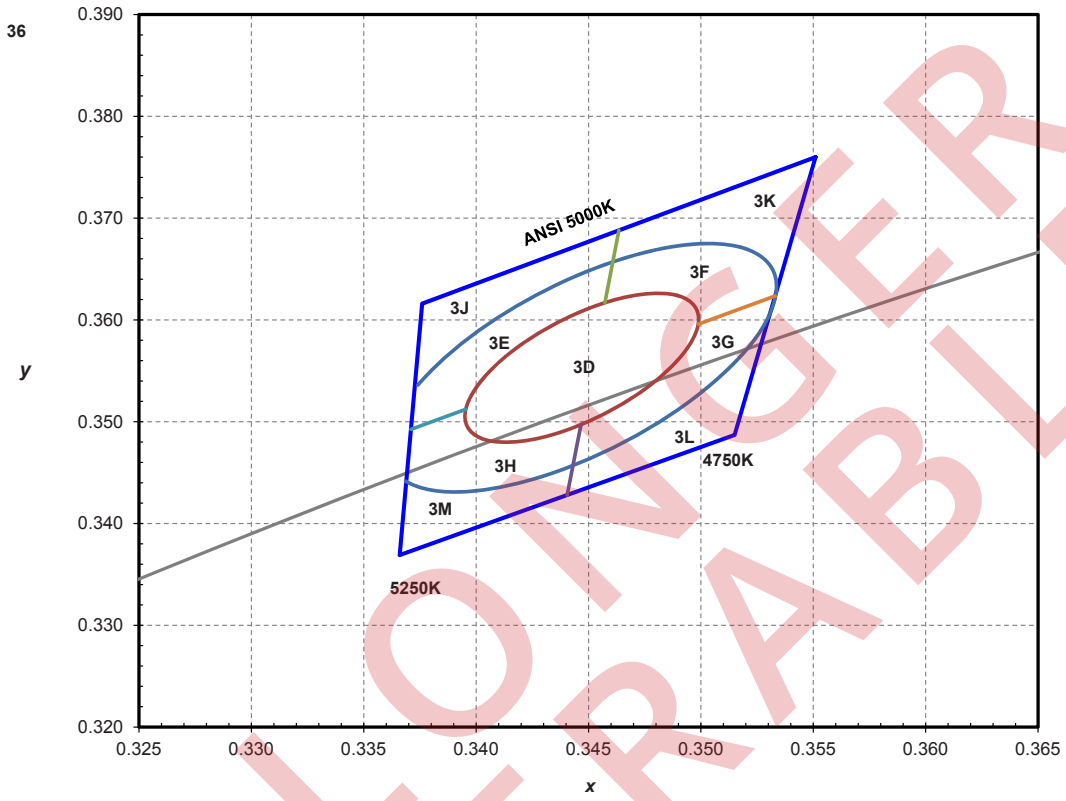


Figure 19. 5000K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 15.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
5000K	Single 3-step MacAdam ellipse	(0.3447, 0.3553)	0.00822	0.00354	59.62
5000K	Single 5-step MacAdam ellipse	(0.3447, 0.3553)	0.01370	0.00590	59.62

Notes for Figure 19 and Table 15:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW57 1/9th Color Bin Structure

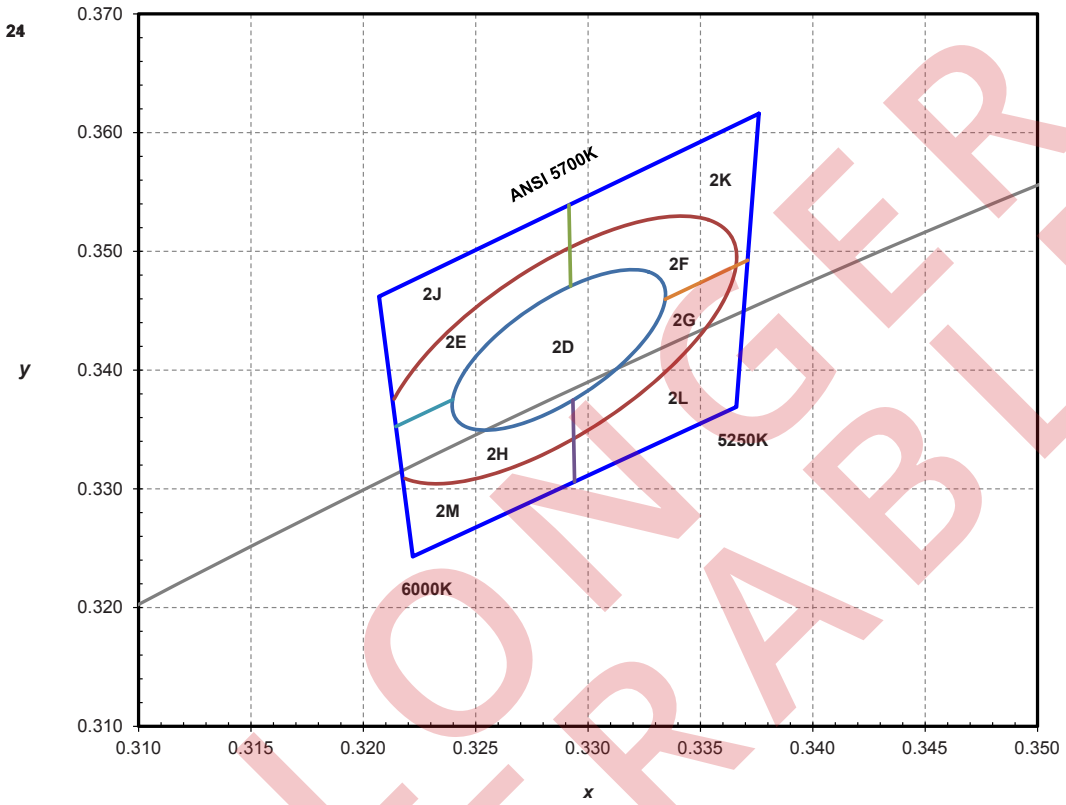


Figure 20. 5700K ANSI 1/9th color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 16.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
5700K	Single 3-step MacAdam ellipse	(0.3287, 0.3417)	0.00746	0.00320	59.09
5700K	Single 5-step MacAdam ellipse	(0.3287, 0.3417)	0.01243	0.00533	59.09

Notes for Figure 20 and Table 16:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

Color Bin Structure

MXZx-PW65 1/9th ColorBin Structure

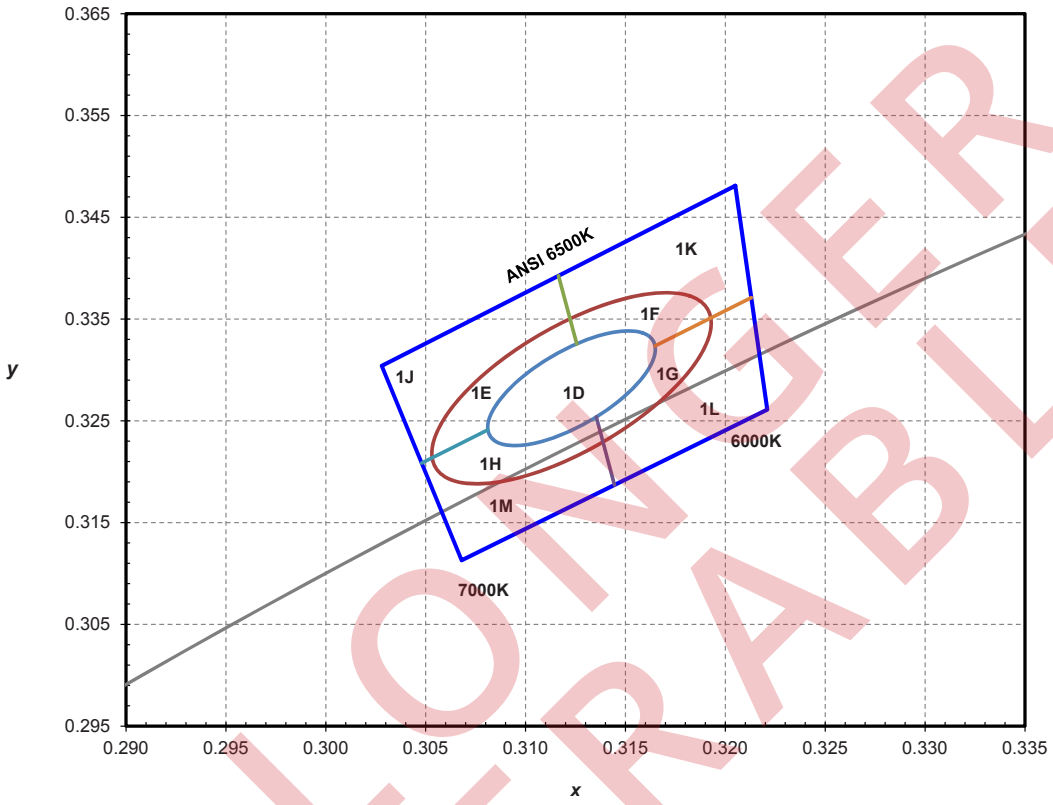


Figure 21. 6500K 1/9th ANSI color bin structure.

LUXEON 4014 emitters are tested and binned by x,y coordinates.

Table 17.

Nominal ANSI CCT	Color Space	Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle (degrees)
6500K	Single 3-step MacAdam ellipse	(0.3123, 0.3282)	0.00669	0.00285	58.57
6500K	Single 5-step MacAdam ellipse	(0.3123, 0.3282)	0.01115	0.00475	58.57

Notes for Figure 21 and Table 17:

1. Tested and binned at 25°C, I_F=30mA. Tester tolerance: ± 0.01 in x and y coordinates.

NO LONGER ORDERABLE

About Lumileds

Lumileds is the global leader in light engine technology. The company develops, manufactures and distributes groundbreaking LEDs and automotive lighting products that shatter the status quo and help customers gain and maintain a competitive edge.

With a rich history of industry "firsts," Lumileds is uniquely positioned to deliver lighting advancements well into the future by maintaining an unwavering focus on quality, innovation and reliability.

To learn more about our portfolio of light engines visit lumileds.com.

NO LONGER ORDERABLE

LUMILEDS

©2016 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.

lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data.