

Miniature Fuses Type FSQ 5 × 20

quick-acting F
Glass tube





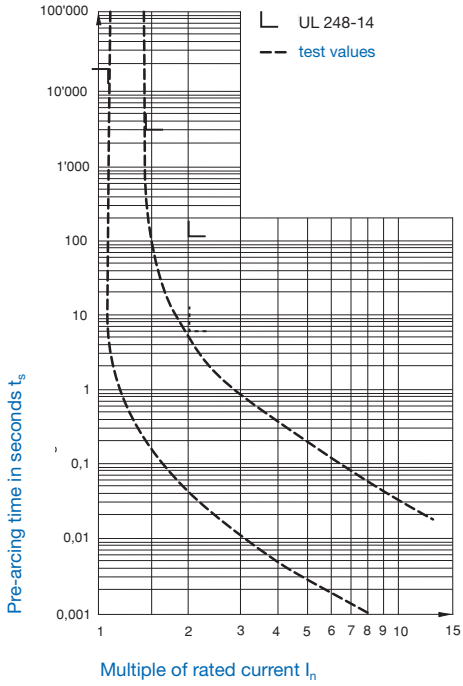

Standards

UL 248-14
CSA C22.2 No. 248.14

Approvals

UL
CSA

Pre-arcing time/current characteristic (at T_a 23 °C)

Rated current I_n \ $n \cdot I_n$	1,1 · I_n*	1,35 · I_n	2 · I_n
	min.	max.	max.
400 mA – 3,5 A	4 h	1 h	120 s

* Non fusing current I_{nf}

Order No.	Rated current I_n / Rated voltage U_n	Breaking capacity	Voltage drop at I_n typ. mV	Sustained power dissipation at 1,1 I_n typ. W	Pre-arcing I^2t at 10 · I_n typ. A^2s	Approvals UL	Approvals CSA
0034.3951	400 mA / 250 V	10 000 A / 125 V AC, p.f. / cos φ 0,7-0,8 35 A / 250 V AC, p.f. / cos φ 0,7-0,8	170	0,1	$8{,}2 \cdot 10^{-1}$	•	•
0034.3952	500 mA / 250 V		140	0,1	$2{,}11 \cdot 10^{-1}$	•	•
0034.3953	600 mA / 250 V		150	0,1	$2{,}58 \cdot 10^{-1}$	•	•
0034.3954	700 mA / 250 V		150	0,2	$4{,}17 \cdot 10^{-1}$	•	•
0034.3955	750 mA / 250 V		150	0,2	$6 \cdot 10^{-1}$	•	•
0034.3956	800 mA / 250 V		140	0,2	$6{,}62 \cdot 10^{-1}$	•	•
0034.3957	1 A / 250 V		120	0,2	1,15	•	•
0034.3958	1,2 A / 250 V	10 000 A / 125 V AC, p.f. / cos φ 0,7-0,8 100 A / 250 V AC, p.f. / cos φ 0,7-0,8	110	0,2	1,82	•	•
0034.3959	1,25 A / 250 V		110	0,2	1,84	•	•
0034.3960	1,5 A / 250 V		110	0,3	3,11	•	•
0034.3961	1,6 A / 250 V		110	0,3	3,84	•	•
0034.3962	1,8 A / 250 V		100	0,3	4,07	•	•
0034.3963	2 A / 250 V		100	0,3	4,51	•	•
0034.3964	2,25 A / 250 V		100	0,3	6,77	•	•
0034.3965	2,5 A / 250 V		100	0,4	11,1	•	•
0034.3966	2,8 A / 250 V		100	0,5	12,7	•	•
0034.3967	3 A / 250 V		100	0,5	14,8	•	•
0034.3968	3,2 A / 250 V		100	0,5	19,2	•	•
0034.3969	3,5 A / 250 V		90	0,5	26,3	•	•