


SHEET OF



RECOMMENDED PANEL LAYOUT

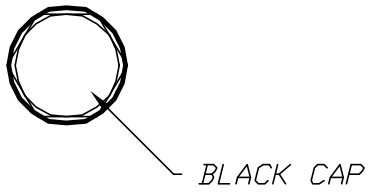





CIRCUIT: SPST

OFF	(ON)

( )=Momentary

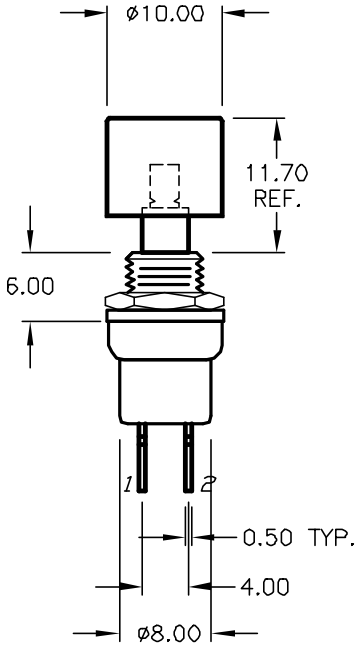

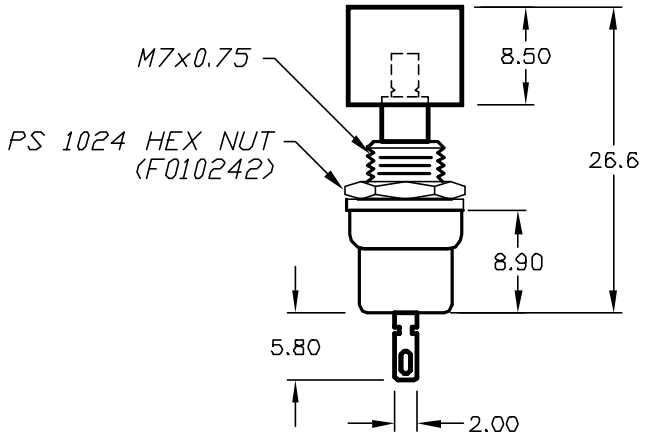

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NO'S FOR REFERENCE ONLY
4. RATING: 3A@ 125VAC; 1.5A @250VAC
5. CONTACT RESISTANCE:
   50mILLI-OHMS max.
6. INSULATION RESISTANCE:
   500V 100Mega-OHMS min.
7. DIELECTRIC STENGTH:
   1000V 1minute
8. HARDWARE SUPPLIED;
   HEX NUT (SHOWN), LOCK WASHER

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C				
B	12574	REVISED AND REDRAWN	11/18/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: PS 1024AL (BLK CAP)

SCALE	DATE	DR	DWG	REV
1.5:1	11/13/96	MM	F010300	B