


Model:PU3013B

Characteristics:

PCB mounting,low mounting height,Input:double
110V/double 115V(or producing as customerized).

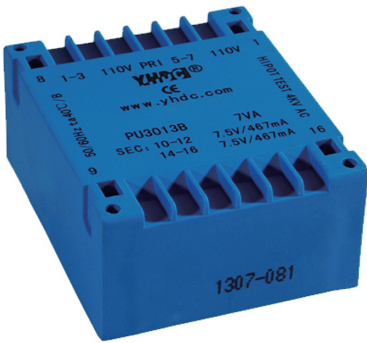

Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30℃~+40℃
Work frequency: 50Hz~60Hz
Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.19V×2	667mA×2
7.5V×2	10.2V×2	533mA×2
9V×2	12.3V×2	444mA×2
12V×2	16.3V×2	333mA×2
15V×2	20.4V×2	267mA×2
18V×2	24.5V×2	222mA×2
24V×2	32.7V×2	167mA×2

Technical Parameters table:

Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤30	%
Power	8	VA
Temperature rising	≤20	℃
No load loss	≤0.7	W
weight	220	g

Schematic Diagram:

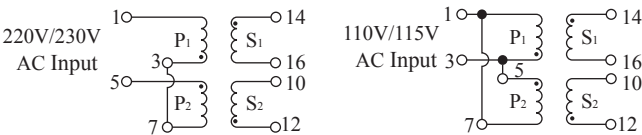

Dimension（in mm）:

