


S-SZAF ***A Series

Zener voltage regulator diodes

1 Watt Steady State

Feature

- * 1 W SMA-FL
- * Zener voltage regulator diodes
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * We declare that the material of product compliance with RoHS requirements.
- * Guarding for over voltage protection
- * High temperature soldering guaranteed:
260°C/10 seconds at terminals
- * IEC61000-4-2 ESD Air Contact $\geq \pm 15\text{KV}$
- * MSL: 1
- * We declare that the material of product compliance with RoHS requirements and Halogen Free.
- * S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.



Mechanical Data

Case: JEDEC SMA-FL molded plastic

Terminals :Plated terminals, solderable per MIL-STD-750,Method 2026

Polarity: Color band denoted cathode except Bipolar

Mounting Position: Any

Weight : Approximated 0.0327 gram

1.Electrical Characteristic

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNITS
Steady State Power Dissipation at $T_A = 50^\circ\text{C}$ (Note1)	$P_{M(AV)}$	1	Watts
Z-current	I_Z	PV/VZ	mA
Operating and Storage Temperature Range	T_J, T_{STG}	-50 to +150	°C

NOTES:

1. 8.0mm² (.013mm thick) land areas

S-SZAF ***A Series




2.Product Characteristic

Vz tolerance : $\pm 5\%$; Ta=25°C V_{fmax} =1.2V @ IF = 200mA P=1 W


Type	Device marking code	Zener	Current	A and B Sufflx only			Leakage Current		Maximum Regulator Current2)
		Voltage	I zt	Z zt @ I zt	Z zk@ Izk	Z zk@ Izk	I _R	V _R	I _{ZM} @ Tamb =50 ° C
		<u>V_z@I_{zt}</u>							
		Volts	mA	Ohms	Ohms	m A	uA Max	Volts	mA
S-SZAF2.4A	Z2.4	2.4	102	30	1200	1	100	1.0	252
S-SZAF2.5A	Z2.5	2.5	98	30	1250	1		1.0	241
S-SZAF2.7A	Z2.7	2.7	90	30	1300	1		1.0	222
S-SZAF2.8A	Z2.8	2.8	87	30	1400	1		1.0	216
S-SZAF3.0A	Z3.0	3.0	82	29	1600	1		1.0	201
S-SZAF3.3A	Z3.3	3.3	76	28	400	1		1.0	184
S-SZAF3.6A	Z3.6	3.6	69	24	400	1		1.0	168
S-SZAF3.9A	Z3.9	3.9	64	23	400	1		1.0	158
S-SZAF4.3A	Z4.3	4.3	58	22	400	1		1.0	142
S-SZAF4.7A	Z4.7	4.7	53	19	400	1		1.0	129
S-SZAF5.1A	Z5.1	5.1	49	7	550	1		1.0	118
S-SZAF5.6A	Z5.6	5.6	45	5	600			2.0	109
S-SZAF6.2A	Z6.2	6.2	41	2	700			3.0	97
S-SZAF6.8A	Z6.8	6.8	37	4	1300			4	133.3
S-SZAF7.5A	Z7.5	7.5	34	4.5	1300	0.5		5	121
S-SZAF8.2A	Z8.2	8.2	31	5.5	1300	0.5		6	110
S-SZAF9.1A	Z9.1	9.1	28	6	1300	0.5		7	100
S-SZAF10A	Z10	10	25	7	1300	0.25	20	7.6	91.3
S-SZAF11A	Z11	11	23	8	1300			8.4	83.3
S-SZAF12A	Z12	12	21	9	1300			9.1	76
S-SZAF13A	Z13	13	19	10	1300			9.9	69.3
S-SZAF15A	Z15	15	17	14	1300			11.4	61.3
S-SZAF16A	Z16	16	15.5	16	1300			12.2	57.3
S-SZAF18A	Z18	18	14	20	1300			13.7	50
S-SZAF20A	Z20	20	12.5	22	1300			15.2	45.3
S-SZAF22A	Z22	22	11.5	23	1300			16.7	41.3
S-SZAF24A	Z24	24	10.5	25	1300			18.2	38
S-SZAF27A	Z27	27	9.5	35	1300			20.6	34
S-SZAF30A	Z30	30	8.5	40	1500			22.8	30
S-SZAF33A	Z33	33	7.5	45	1500		5	25.1	27.3
S-SZAF36A	Z36	36	7	50	1500			27.4	25.3
S-SZAF39A	Z39	39	6.5	60	1500			29.7	23.3
S-SZAF43A	Z43	43	6	70	2500			32.7	22
S-SZAF47A	Z47	47	5.5	80	2500			35.8	19.3
S-SZAF51A	Z51	51	5	95	2500	38.8		18	
S-SZAF56A	Z56	56	4.5	110	2500	42.6		16	
S-SZAF62A	Z62	62	4	125	2500	47.1		14	
S-SZAF68A	Z68	68	3.7	150	2500	51.7		13.3	
S-SZAF75A	Z75	75	3.3	175	2500	56		12	
S-SZAF82A	Z82	82	3	200	3000	62.2		11.3	
S-SZAF91A	Z91	91	2.8	250	3000	69.2		10	
S-SZAF100A	Z100	100	2.5	350	3000	76		9.3	
S-SZAF110A	Z110	110	2	550	5000	83		8	
S-SZAF120A	Z120	120	1.5	750	5500	90		7.3	
S-SZAF130A	Z130	130	1	900	6000	98	6		
S-SZAF150A	Z150	150	1	1200	6500	113	6		
S-SZAF160A	Z160	160	1	1350	7000	120	6		
S-SZAF180A	Z180	180	1	1650	8500	135	5.3		
S-SZAF200A	Z200	200	1	1950	10000	150	4		
S-SZAF220A	Z220	220	1	2300	12000	165	4		

S-SZAF ***A Series

3.Characteristic Curves

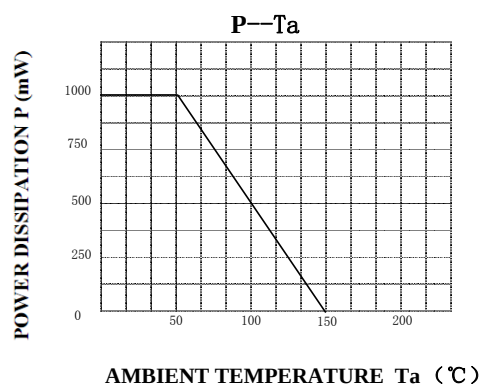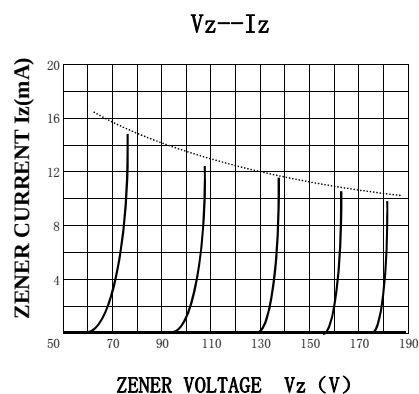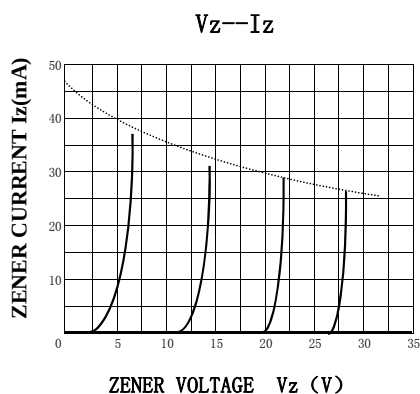

4.OUTLINE AND DIMENSIONS

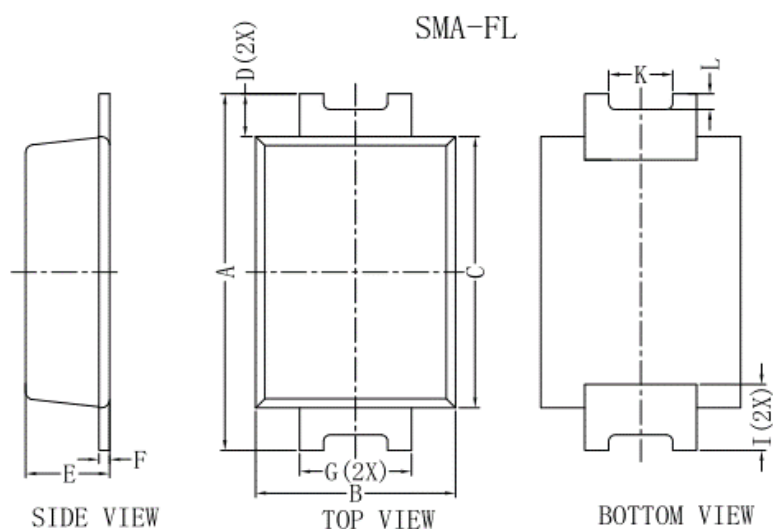


SMA-FL			
DIM	MIN	MAX	Typ.
A	4.40	4.80	4.60
B	2.30	2.70	2.60
C	3.30	3.70	3.50
D	-	-	0.55
E	0.90	1.20	1.05
F	0.11	0.21	0.17
G	1.30	1.50	1.40
I	-	-	0.90
K	-	-	0.80
L	-	-	0.20
All Dimensions in mm			

GENERAL NOTES

- 1.Top package surface finish $Ra0.4\pm0.2\mu m$
- 2.Bottom package surface finish $Ra0.7\pm0.2\mu m$

5.SOLDERING FOOTPRINT

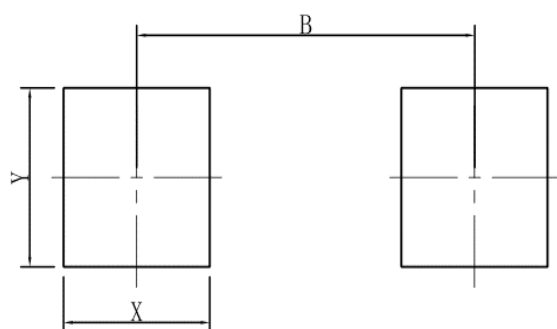

SMA-FL	
DIM	(mm)
X	1.60
Y	1.80
B	3.70