

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0022051092

Status:

Active

Description:

2.50mm (.098") Pitch Wire-to-Board Header, Right Angle, Friction Lock, 9 Circuits, Tin (Sn) Plating

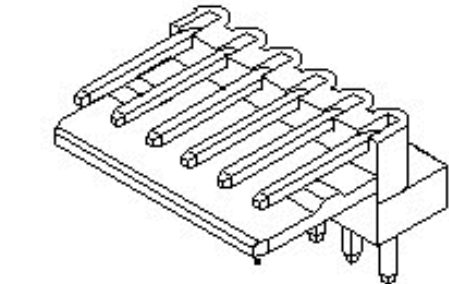

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-5046-002 \(PDF\)](#)
- [Product Specification PS-5102-002 \(PDF\)](#)
- [Product Specification PS-51191-002 \(PDF\)](#)
- [Product Specification PS-5251-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72090224
UL	E29179

General

Product Family	PCB Headers
Series	5046
Application	Wire-to-Board
Product Name	N/A

Physical

Breakaway	No
Circuits (Loaded)	9
Circuits (maximum)	9
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PC Tail Length (in)	0.134 In
PC Tail Length (mm)	3.40 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Plating min: Mating (µin)	200
Plating min: Mating (µm)	5
Plating min: Termination (µin)	200
Plating min: Termination (µm)	5
Polarized to PCB	No
Shrouded	Partial
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

5046Series

Mates With

51191 KK® Wire-to-Board Header

Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	1.5A, 2.5A, 2A, 3A
Voltage - Maximum	250V
Material Info	
Old Part Number	5046-09A
Reference - Drawing Numbers	
Packaging Specification	SPK-5046-001
Product Specification	PS-5046-002, PS-5102-002, PS-51191-002, PS-5251-001, RPS-51191-007
Sales Drawing	SD-5046-NA

This document was generated on 05/12/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

注記
NOTES :

1. そりは長さ25.4に対して0.2MAX.
CAMBER MUST BE WITHIN 0.2MAX.
PER 25.4 .
2. 材料(MATERIAL)
- ウエハー：66ナイロン，UL94V-O
WAFER: 66NYLON , UL94V-O
- ピン： ϕ 0.635 黄銅、銅下地錫メッキ
PIN: ϕ 0.635 BRASS, TIN OVER COPPER
PLATING.
- △ 全極数が偶数の場合のみ適用。
APPLY FOR EVEN CIRCUITS PRODUCT ONLY.

49.5	47.5	22-05- I202	5046-20A	20
47	45	↗ - I192	↗ - 19A	19
44.5	42.5	- I182	- 18A	18
42	40	- I172	- 17A	17
39.5	37.5	- I162	- 16A	16
37	35	- I152	- 15A	15
34.5	32.5	- I142	- 14A	14
32	30	- I132	- 13A	13
29.5	27.5	- I122	- 12A	12
27	25	- I112	- 11A	11
24.5	22.5	- I102	- 10A	10
22	20	- I092	- 09A	9
19.5	17.5	- I082	- 08A	8
17	15	- I072	- 07A	7
14.5	12.5	- I062	- 06A	6
12	10	- I052	- 05A	5
9.5	7.5	↘ - I042	↘ - 04A	4
7	5	- I032	- 03A	3
4.5	2.5	22-05- I022	5046-02A	2
(B)	(A)	EDP NO.	ENG.NO.	極數 CKT.

材料 MATERIAL	注記参照 SEE NOTE
----------------	------------------

仕上げ

適用電線範圍	_____
WIRE RANGE	_____

被覆外径 INS. RANGE	—//—
--------------------	------

10	DRAWN BY '92/1/9 Y.MIZUNO	CHK'D BY '92/1/9 Y.M H.HIRA
----	------------------------------	--------------------------------

寸 E	APP'D BY '94/11/1 M.FUKUSHIMA	尺 度 SCALE 5
--------	----------------------------------	----------------

 MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社

REVISION ONLY ON CAD SYSTEM



TITLE 名称
KK2.5 RIGHT ANGLE
WAFER ASS'Y

DWG. NO.	RE
----------	----



SD-5046-NA	H
------------	---

極數
CKT

5046.S20

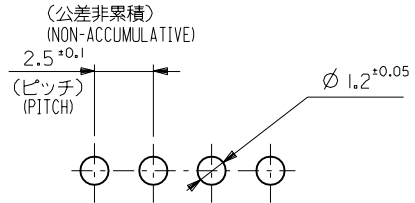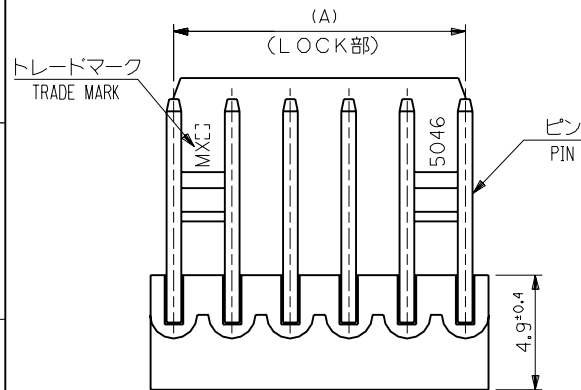

基板取付穴推奨寸法 (t1.6)
RECOMMENDED P.C.BOARD HOLE DIM.

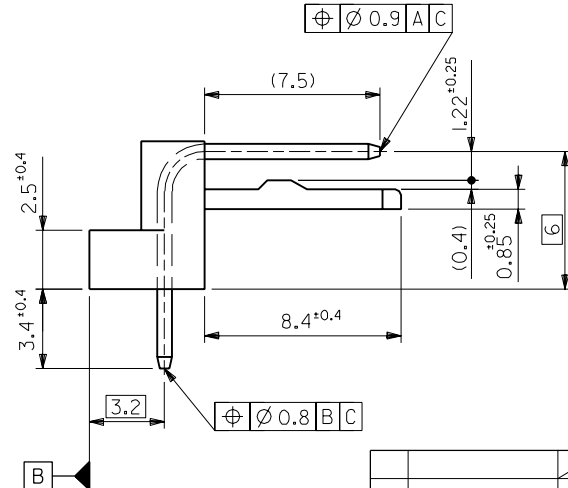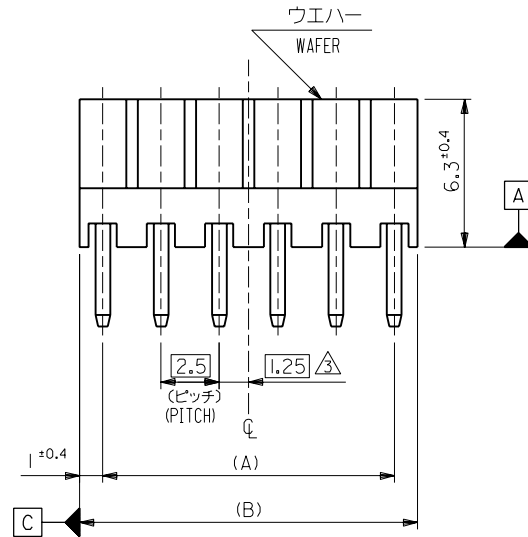

角度 ANGLE	±3°				
30 以上 OVER	±0.3				
10 以下 30 未満 UNDER	±0.25	H	変更 REVISED	(440895)	M.S. H.H.
10 未満 UNDER	±0.2	G	変更及び再作図 REVISED & REDRAWN	(420018)	Y.M. H.I.I.
一般公差 GENERAL TOLERANCES	記号 LTR		変更内容 REVISION RECORD		DR. CHK.