

# DATA SHEET

## **SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS**

General purpose

Class 1, NP0

16 V TO 50 V

0.22 pF to 33 nF

RoHS compliant & Halogen Free



## SCOPE

This specification describes NP0 series chip capacitors with lead-free terminations.

## APPLICATIONS

- Consumer electronics for example
  - Tuners
  - Television receivers
  - All types of cameras
- Telecommunications
- Data processing

## FEATURES

- Supplied in tape on reel
- Nickel-barrier end termination
- RoHS compliant
- Halogen Free compliant

## ORDERING INFORMATION - GLOBAL PART NUMBER, PHYCOMP

### CTC & I2NC

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value.

### YAGEO BRAND ordering code

### GLOBAL PART NUMBER (PREFERRED)

CC    XXXX   X   X   NP0   X   BN   XXX  
           (1)    (2) (3)                (4)        (5)

### (1) SIZE – INCH BASED (METRIC)

0201 (0603)  
 0402 (1005)  
 0603 (1608)  
 0805 (2012)  
 1206 (3216)  
 1210 (3225)  
 1812 (4532)

### (2) TOLERANCE

B =  $\pm 0.1$  pF  
 C =  $\pm 0.25$  pF  
 D =  $\pm 0.5$  pF  
 F =  $\pm 1\%$   
 G =  $\pm 2\%$   
 J =  $\pm 5\%$

### (3) PACKING STYLE

R = Paper/PE taping reel; Reel 7 inch  
 K = Blister taping reel; Reel 7 inch  
 P = Paper/PE taping reel; Reel 13 inch  
 F = Blister taping reel; Reel 13 inch  
 C = Bulk case

### (4) RATED VOLTAGE

7 = 16 V  
 8 = 25 V  
 9 = 50 V

### (5) CAPACITANCE VALUE

2 significant digits+number of zeros  
 The 3rd digit signifies the multiplying factor, and letter R is decimal point  
 Example: 121 =  $12 \times 10^1 = 120$  pF

**PHYCOMP BRAND ordering codes**


GLOBAL PART NUMBER (preferred), PHYCOMP CTC (for North America) and I2NC (traditional) codes are acceptable to order Phycomp brand products.

**GLOBAL PART NUMBER (PREFERRED)**


For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

**I2NC CODE**

Ordering information for 16 V to 25 V

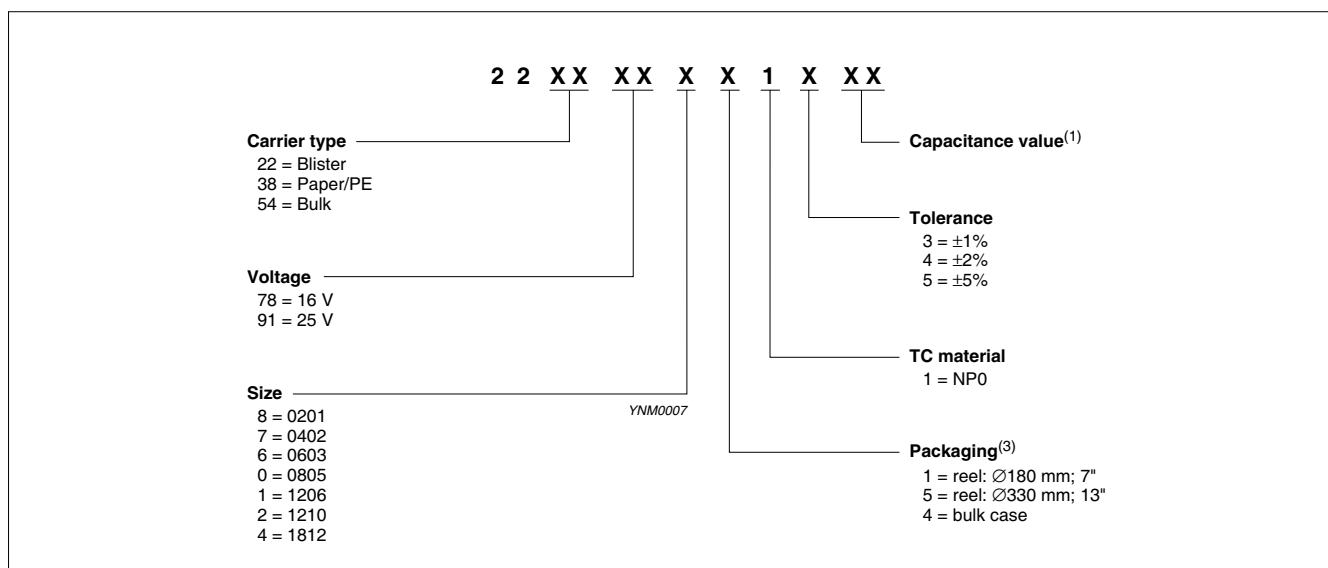

Ordering information for 50 V

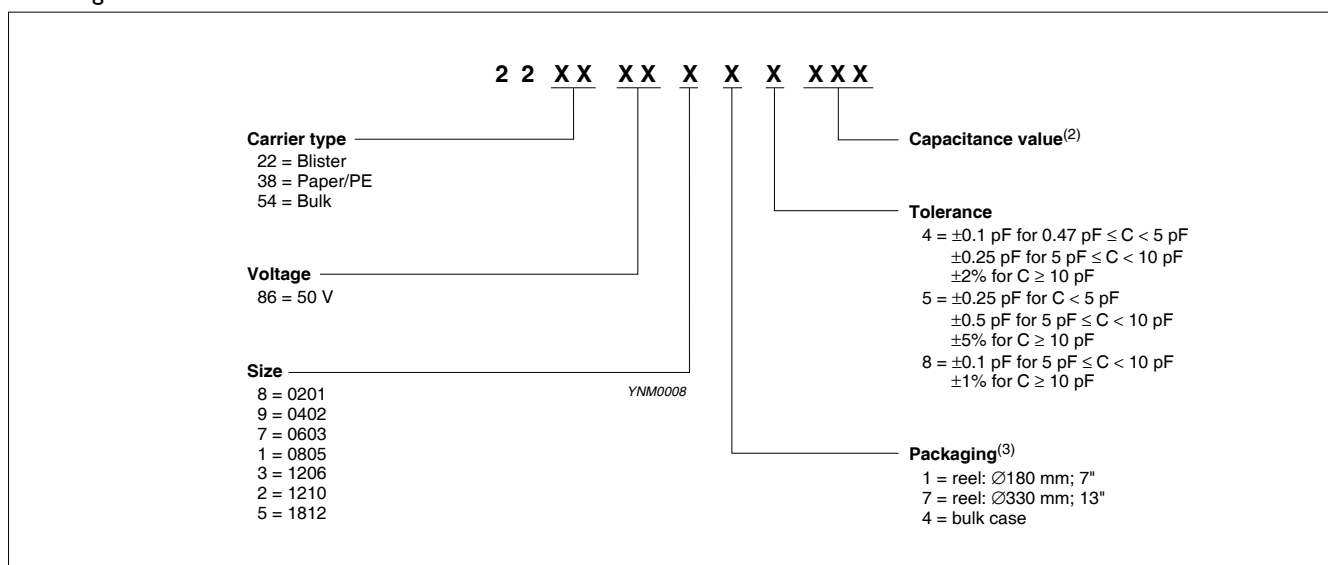

(1) Please refer to "Last 2-digit of I2NC" in "CAPACITANCE RANGE & THICKNESS FOR NP0"

(2) Please refer to "Last 3-digit of I2NC" in "CAPACITANCE RANGE & THICKNESS FOR NP0"

(3) Quantity on reel depends on thickness classification; see table 6

**PHYCOMP CTC CODE (FOR NORTH AMERICA)**

Example: 0603CG271J7B200

| 0603      | CG          | 271                   | J                 | 7        | B           | 2             | 0              | 0                 |
|-----------|-------------|-----------------------|-------------------|----------|-------------|---------------|----------------|-------------------|
| Size code | Temp. Char. | Capacitance in pF     | Tolerance         | Voltage  | Termination | Packing       | Marking        | Range identifier  |
| 0201      | CG = NP0    | 101 = 100 pF; the     | B = $\pm 0.1$ pF  | 7 = 16 V | B = NiSn    | 2 = 180 mm    | 0 = no marking | 0 = conv. ceramic |
| 0402      |             | third digit signifies | C = $\pm 0.25$ pF | 8 = 25 V |             | 7" paper      |                |                   |
| 0603      |             | the multiplying       | D = $\pm 0.5$ pF  | 9 = 50 V |             | 3 = 330 mm    |                |                   |
| 0805      |             | factor:               | F = $\pm 1\%$     |          |             | 13" paper     |                |                   |
| 1206      |             | 0 = $\times 1$        | G = $\pm 2\%$     |          |             | B = 180 mm    |                |                   |
| 1210      |             | 1 = $\times 10$       | J = $\pm 5\%$     |          |             | 7" blister    |                |                   |
| 1812      |             | 2 = $\times 100$      |                   |          |             | F = 330 mm    |                |                   |
|           |             | 3 = $\times 1,000$    |                   |          |             | 13" blister   |                |                   |
|           |             |                       |                   |          |             | P = Bulk case |                |                   |

**CONSTRUCTION**

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (NiSn). The terminations are lead-free. A cross section of the structure is shown in Fig. 1.

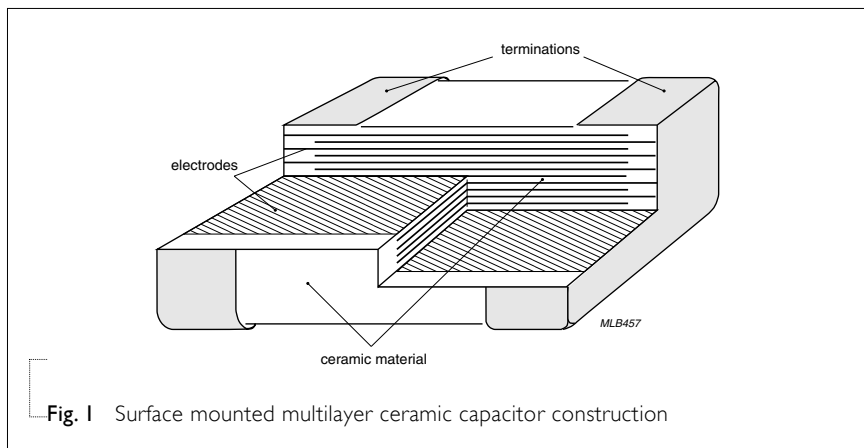


Fig. 1 Surface mounted multilayer ceramic capacitor construction

**DIMENSION**

Table I For outlines see fig. 2

| TYPE | L <sub>1</sub> (mm)           | W (mm)                         | T (MM)                   | L <sub>2</sub> / L <sub>3</sub> (mm) |      | L <sub>4</sub> (mm) |
|------|-------------------------------|--------------------------------|--------------------------|--------------------------------------|------|---------------------|
|      |                               |                                |                          | min.                                 | max. | min.                |
| 0201 | 0.6 $\pm$ 0.03                | 0.3 $\pm$ 0.03                 | Refer to<br>table 2 to 5 | 0.10                                 | 0.20 | 0.20                |
| 0402 | 1.0 $\pm$ 0.05                | 0.5 $\pm$ 0.05                 |                          | 0.20                                 | 0.30 | 0.40                |
| 0603 | 1.6 $\pm$ 0.10                | 0.8 $\pm$ 0.10                 |                          | 0.20                                 | 0.60 | 0.40                |
| 0805 | 2.0 $\pm$ 0.10 <sup>(1)</sup> | 1.25 $\pm$ 0.10 <sup>(1)</sup> |                          | 0.25                                 | 0.75 | 0.55                |
|      | 2.0 $\pm$ 0.20 <sup>(2)</sup> | 1.25 $\pm$ 0.20 <sup>(2)</sup> |                          |                                      |      |                     |
| 1206 | 3.2 $\pm$ 0.15 <sup>(1)</sup> | 1.6 $\pm$ 0.15 <sup>(1)</sup>  |                          | 0.25                                 | 0.75 | 1.40                |
|      | 3.2 $\pm$ 0.30 <sup>(2)</sup> | 1.6 $\pm$ 0.20 <sup>(2)</sup>  |                          |                                      |      |                     |
| 1210 | 3.2 $\pm$ 0.20                | 2.5 $\pm$ 0.20                 |                          | 0.25                                 | 0.75 | 1.40                |
| 1812 | 4.5 $\pm$ 0.20                | 3.2 $\pm$ 0.20                 |                          | 0.25                                 | 0.75 | 2.20                |

**NOTE**

1. Dimension for size 0805 and 1206, C  $\leq$  1 nF
2. Dimension for size 0805 and 1206, C > 1 nF

**OUTLINES**

For dimension see Table I

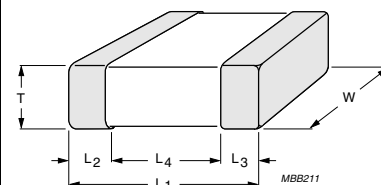


Fig. 2 Surface mounted multilayer ceramic capacitor dimension

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 2** Sizes from 0201 to 0603

| CAP.    | Last 3-digit of | Last 2-digit of | 0201     |          | 0402     |          | 0603     |         |         |         |
|---------|-----------------|-----------------|----------|----------|----------|----------|----------|---------|---------|---------|
|         | I2NC            | I2NC            | 25 V     | 50 V     | 16 V     | 25 V     | 50 V     | 16 V    | 25 V    | 50 V    |
| 0.22 pF | 227             | On request      |          |          |          |          |          |         |         |         |
| 0.47 pF | 477             |                 |          |          |          |          |          |         |         |         |
| 0.82 pF | 827             |                 |          |          |          |          |          |         |         |         |
| 1.0 pF  | 108             |                 |          |          |          |          |          |         |         |         |
| 1.2 pF  | 128             |                 |          |          |          |          |          |         |         |         |
| 1.5 pF  | 158             |                 |          |          |          |          |          |         |         |         |
| 1.8 pF  | 188             |                 |          |          |          |          |          |         |         |         |
| 2.2 pF  | 228             |                 |          |          |          |          |          |         |         |         |
| 2.7 pF  | 278             |                 |          |          |          |          |          |         |         |         |
| 3.3 pF  | 338             |                 |          |          |          |          |          |         |         |         |
| 3.9 pF  | 398             |                 |          |          |          |          |          |         |         |         |
| 4.7 pF  | 478             |                 |          |          |          |          |          |         |         |         |
| 5.6 pF  | 568             |                 |          |          |          |          |          |         |         |         |
| 6.8 pF  | 688             |                 |          |          |          |          |          |         |         |         |
| 8.2 pF  | 828             |                 |          |          |          |          |          |         |         |         |
| 10 pF   | 109             | 23              |          | 0.3±0.03 |          |          | 0.5±0.05 |         |         | 0.8±0.1 |
| 12 pF   | 129             | 24              |          |          |          |          |          |         |         |         |
| 15 pF   | 159             | 25              |          |          |          |          |          |         |         |         |
| 18 pF   | 189             | 26              |          |          |          |          |          |         |         |         |
| 22 pF   | 229             | 27              |          |          |          |          |          |         |         |         |
| 27 pF   | 279             | 28              |          |          |          |          |          |         |         |         |
| 33 pF   | 339             | 29              | 0.3±0.03 |          | 0.5±0.05 | 0.5±0.05 |          | 0.8±0.1 | 0.8±0.1 |         |
| 39 pF   | 399             | 31              |          |          |          |          |          |         |         |         |
| 47 pF   | 479             | 32              |          |          |          |          |          |         |         |         |
| 56 pF   | 569             | 33              |          |          |          |          |          |         |         |         |
| 68 pF   | 689             | 34              |          |          |          |          |          |         |         |         |
| 82 pF   | 829             | 35              |          |          |          |          |          |         |         |         |
| 100 pF  | 101             | 36              |          |          |          |          |          |         |         |         |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request
3. 16V to 25V, refer to last 2-digit of I2NC
4. 50V, refer to last 3-digit of I2NC

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 3** Sizes from 0201 to 0603 (continued)

| CAP.   | Last 3-digit of | Last 2-digit of | 0201 |      | 0402     |          |          | 0603    |         |         |
|--------|-----------------|-----------------|------|------|----------|----------|----------|---------|---------|---------|
|        | I2NC            | I2NC            | 25 V | 50 V | 16 V     | 25 V     | 50 V     | 16 V    | 25 V    | 50 V    |
| 120 pF | 121             | 37              |      |      | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.8±0.1 | 0.8±0.1 | 0.8±0.1 |
| 150 pF | 151             | 38              |      |      |          |          |          |         |         |         |
| 180 pF | 181             | 39              |      |      |          |          |          |         |         |         |
| 220 pF | 221             | 41              |      |      |          |          |          |         |         |         |
| 270 pF | 271             | 42              |      |      |          |          |          |         |         |         |
| 330 pF | 331             | 43              |      |      |          |          |          |         |         |         |
| 390 pF | 391             | 44              |      |      |          |          |          |         |         |         |
| 470 pF | 471             | 45              |      |      |          |          |          |         |         |         |
| 560 pF | 561             | 46              |      |      |          |          |          |         |         |         |
| 680 pF | 681             | 47              |      |      |          |          |          |         |         |         |
| 820 pF | 821             | 48              |      |      |          |          |          |         |         |         |
| 1.0 nF | 102             | 49              |      |      |          |          |          |         |         |         |
| 1.2 nF | 122             | 51              |      |      |          |          |          |         |         |         |
| 1.5 nF | 152             | 52              |      |      |          |          |          |         |         |         |
| 1.8 nF | 182             | 53              |      |      |          |          |          |         |         |         |
| 2.2 nF | 222             | 54              |      |      |          |          |          |         |         |         |
| 2.7 nF | 272             | 55              |      |      |          |          |          |         |         |         |
| 3.3 nF | 332             | 56              |      |      |          |          |          |         |         |         |
| 3.9 nF | 392             | 57              |      |      |          |          |          |         |         |         |
| 4.7 nF | 472             | 58              |      |      |          |          |          |         |         |         |
| 5.6 nF | 562             | 59              |      |      |          |          |          |         |         |         |
| 6.8 nF | 682             | 61              |      |      |          |          |          |         |         |         |
| 8.2 nF | 822             | 62              |      |      |          |          |          |         |         |         |
| 10 nF  | 103             | 63              |      |      |          |          |          |         |         |         |
| 12 nF  | 123             | 64              |      |      |          |          |          |         |         |         |
| 15 nF  | 153             | 65              |      |      |          |          |          |         |         |         |
| 18 nF  | 183             | 66              |      |      |          |          |          |         |         |         |
| 22 nF  | 223             | 67              |      |      |          |          |          |         |         |         |
| 33 nF  | 333             | 69              |      |      |          |          |          |         |         |         |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request
3. 16V to 25V, refer to last 2-digit of I2NC
4. 50V, refer to last 3-digit of I2NC

**CAPACITANCE RANGE & THICKNESS FOR NP0**
**Table 4** Sizes from 0805 to 1812

| CAP.    | Last 3-digit of | Last 2-digit of | 0805    |         |         | 1206    |         |         | 1210     |          | 1812 |
|---------|-----------------|-----------------|---------|---------|---------|---------|---------|---------|----------|----------|------|
|         | 12NC            | 12NC            | 16 V    | 25 V    | 50 V    | 16 V    | 25 V    | 50 V    | 25 V     | 50 V     | 50 V |
| 0.22 pF | 227             | On request      |         |         |         |         |         |         |          |          |      |
| 0.47 pF | 477             |                 |         |         |         |         |         |         |          |          |      |
| 0.82 pF | 827             |                 |         |         |         |         |         |         |          |          |      |
| 1.0 pF  | 108             |                 |         |         |         |         |         |         |          |          |      |
| 1.2 pF  | 128             |                 |         |         |         |         |         |         |          |          |      |
| 1.5 pF  | 158             |                 |         |         |         |         |         |         |          |          |      |
| 1.8 pF  | 188             |                 |         |         |         |         |         |         |          |          |      |
| 2.2 pF  | 228             |                 |         |         |         |         |         |         |          |          |      |
| 2.7 pF  | 278             |                 |         |         |         |         |         |         |          |          |      |
| 3.3 pF  | 338             |                 |         |         |         |         |         |         |          |          |      |
| 3.9 pF  | 398             |                 |         |         |         |         |         |         |          |          |      |
| 4.7 pF  | 478             |                 |         |         |         |         |         |         |          |          |      |
| 5.6 pF  | 568             |                 |         |         |         |         |         |         |          |          |      |
| 6.8 pF  | 688             |                 |         |         |         |         |         |         |          |          |      |
| 8.2 pF  | 828             |                 |         |         | 0.6±0.1 |         |         | 0.6±0.1 |          |          |      |
| 10 pF   | 109             | 23              |         |         |         |         |         |         |          |          |      |
| 12 pF   | 129             | 24              |         |         |         |         |         |         |          |          |      |
| 15 pF   | 159             | 25              |         |         |         |         |         |         |          |          |      |
| 18 pF   | 189             | 26              |         |         |         |         |         |         |          |          |      |
| 22 pF   | 229             | 27              |         |         |         |         |         |         |          |          |      |
| 27 pF   | 279             | 28              |         |         |         |         |         |         |          |          |      |
| 33 pF   | 339             | 29              | 0.6±0.1 | 0.6±0.1 |         | 0.6±0.1 | 0.6±0.1 |         |          |          |      |
| 39 pF   | 399             | 31              |         |         |         |         |         |         |          |          |      |
| 47 pF   | 479             | 32              |         |         |         |         |         |         |          |          |      |
| 56 pF   | 569             | 33              |         |         |         |         |         |         |          |          |      |
| 68 pF   | 689             | 34              |         |         |         |         |         |         | 1.25±0.2 | 1.25±0.2 |      |
| 82 pF   | 829             | 35              |         |         |         |         |         |         |          |          |      |
| 100 pF  | 101             | 36              |         |         |         |         |         |         |          |          |      |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request
3. 16V to 25V, refer to last 2-digit of 12NC
4. 50V, refer to last 3-digit of 12NC

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 5** Sizes from 0805 to 1812 (continued)

| CAP.   | Last 3-digit of | Last 2-digit of | 0805                 |                      |                      | 1206     |          |          | 1210     |          | 1812     |
|--------|-----------------|-----------------|----------------------|----------------------|----------------------|----------|----------|----------|----------|----------|----------|
|        | 12NC            | 12NC            | 16 V                 | 25 V                 | 50 V                 | 16 V     | 25 V     | 50 V     | 25 V     | 50 V     | 50 V     |
| 120 pF | 121             | 37              | 0.6±0.1              | 0.6±0.1              | 0.6±0.1              | 0.6±0.1  | 0.6±0.1  | 0.6±0.1  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 150 pF | 151             | 38              |                      |                      |                      |          |          |          |          |          |          |
| 180 pF | 181             | 39              |                      |                      |                      |          |          |          |          |          |          |
| 220 pF | 221             | 41              |                      |                      |                      |          |          |          |          |          |          |
| 270 pF | 271             | 42              |                      |                      |                      |          |          |          |          |          |          |
| 330 pF | 331             | 43              |                      |                      |                      |          |          |          |          |          |          |
| 390 pF | 391             | 44              |                      |                      |                      |          |          |          |          |          |          |
| 470 pF | 471             | 45              |                      |                      |                      |          |          |          |          |          |          |
| 560 pF | 561             | 46              |                      |                      |                      |          |          |          |          |          |          |
| 680 pF | 681             | 47              |                      |                      |                      |          |          |          |          |          |          |
| 820 pF | 821             | 48              |                      |                      |                      |          |          |          |          |          |          |
| 1.0 nF | 102             | 49              |                      |                      |                      |          |          |          |          |          |          |
| 1.2 nF | 122             | 51              | 0.85±0.1<br>1.25±0.2 | 0.85±0.1<br>1.25±0.2 | 0.85±0.1<br>1.25±0.2 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 1.0±0.15 | 1.0±0.15 | 1.25±0.2 |
| 1.5 nF | 152             | 52              |                      |                      |                      |          |          |          |          |          |          |
| 1.8 nF | 182             | 53              |                      |                      |                      |          |          |          |          |          |          |
| 2.2 nF | 222             | 54              | 1.25±0.2             | 1.25±0.2             | 1.25±0.2             | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 2.7 nF | 272             | 55              |                      |                      |                      |          |          |          |          |          |          |
| 3.3 nF | 332             | 56              |                      |                      |                      |          |          |          |          |          |          |
| 3.9 nF | 392             | 57              |                      |                      |                      |          |          |          |          |          |          |
| 4.7 nF | 472             | 58              |                      |                      |                      |          |          |          |          |          |          |
| 5.6 nF | 562             | 59              |                      |                      |                      |          |          |          |          |          |          |
| 6.8 nF | 682             | 61              |                      |                      |                      |          |          |          |          |          |          |
| 8.2 nF | 822             | 62              |                      |                      |                      |          |          |          |          |          |          |
| 10 nF  | 103             | 63              |                      |                      |                      |          |          |          |          |          |          |
| 12 nF  | 123             | 64              |                      |                      |                      |          |          |          |          |          |          |
| 15 nF  | 153             | 65              |                      |                      |                      |          |          |          |          |          |          |
| 18 nF  | 183             | 66              |                      |                      |                      |          |          |          |          |          |          |
| 22 nF  | 223             | 67              |                      |                      |                      |          |          |          |          |          |          |
| 33 nF  | 333             | 69              |                      |                      |                      |          |          |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request
3. 16V to 25V, refer to last 2-digit of 12NC
4. 50V, refer to last 3-digit of 12NC



## THICKNESS CLASSES AND PACKING QUANTITY

Table 6

| SIZE CODE | THICKNESS CLASSIFICATION | TAPE WIDTH<br>QUANTITY PER REEL | Ø180 MM / 7 INCH |                | Ø330 MM / 13 INCH |         | QUANTITY<br>PER BULK CASE |
|-----------|--------------------------|---------------------------------|------------------|----------------|-------------------|---------|---------------------------|
|           |                          |                                 | Paper            | Blister        | Paper             | Blister |                           |
| 0201      | 0.3 ±0.03 mm             | 8 mm                            | 15,000           | ---            | 50,000            | ---     | ---                       |
| 0402      | 0.5 ±0.05 mm             | 8 mm                            | 10,000           | ---            | 50,000            | ---     | 50,000                    |
| 0603      | 0.8 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 15,000            | ---     | 15,000                    |
| 0805      | 0.6 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 20,000            | ---     | 10,000                    |
|           | 0.85 ±0.1 mm             | 8 mm                            | 4,000            | ---            | 15,000            | ---     | 8,000                     |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | 5,000                     |
| 1206      | 0.6 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 20,000            | ---     | ---                       |
|           | 0.85 ±0.1 mm             | 8 mm                            | 4,000            | ---            | 15,000            | ---     | ---                       |
|           | 1.00 / 1.15 ±0.1 mm      | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.6 ±0.15 mm             | 8 mm                            | ---              | 2,500          | ---               | 10,000  | ---                       |
|           | 1.6 ±0.2 mm              | 8 mm                            | ---              | 2,000          | ---               | 10,000  | ---                       |
| 1210      | 0.6 / 0.7 ±0.1 mm        | 8 mm                            | ---              | 4,000          | ---               | 15,000  | ---                       |
|           | 0.85 ±0.1 mm             | 8 mm                            | ---              | 4,000          | ---               | 10,000  | ---                       |
|           | 1.0 ±0.1 mm              | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.15 ±0.1 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.15 ±0.15 mm            | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 8 mm                            | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.6 / 1.9 ±0.2 mm        | 8 mm                            | ---              | 2,000          | ---               | ---     | ---                       |
|           | 2.0 ±0.2 mm              | 8 mm                            | ---              | 2,000<br>1,000 | ---               | ---     | ---                       |
|           | 2.5 ±0.2 mm              | 8 mm                            | ---              | 1,000<br>500   | ---               | ---     | ---                       |
| 1808      | 1.15 ±0.15 mm            | 12 mm                           | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.25 ±0.2 mm             | 12 mm                           | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.35 ±0.15 mm            | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.6 ±0.2 mm              | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 2.0 ±0.2 mm              | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
| 1812      | 0.6 / 0.85 ±0.1 mm       | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.15 ±0.1 mm             | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.15 ±0.15 mm            | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.35 ±0.15 mm            | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.6 ±0.2 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 2.0 ±0.2 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 2.5 ±0.2 mm              | 12 mm                           | ---              | 500            | ---               | ---     | ---                       |



ELECTRICAL CHARACTERISTICS

NP0 DIELECTRIC CAPACITORS; NISN TERMINATIONS

Unless otherwise stated all electrical values apply at an ambient temperature of 20±1 °C, an atmospheric pressure of 86 to 106 kPa, and a relative humidity of 63 to 67%.

Table 7

| DESCRIPTION                                                                                          | VALUE                                                                                         |
|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Capacitance range                                                                                    | 0.22 pF to 33 nF                                                                              |
| Capacitance tolerance                                                                                |                                                                                               |
| C < 10 pF                                                                                            | ±0.1 pF, ±0.25 pF, ±0.5 pF                                                                    |
| C ≥ 10 pF                                                                                            | ±1%, ±2%, ±5%                                                                                 |
| Dissipation factor (D.F.)                                                                            |                                                                                               |
| C < 30 pF                                                                                            | ≤ 1 / ( 400 + 20C )                                                                           |
| C ≥ 30 pF                                                                                            | ≤ 0.1 %                                                                                       |
| Insulation resistance after 1 minute at U <sub>r</sub> (DC)                                          | R <sub>ins</sub> ≥ 10 GΩ or R <sub>ins</sub> × C <sub>r</sub> ≥ 500 seconds whichever is less |
| Maximum capacitance change as a function of temperature<br>(temperature characteristic/coefficient): | ±30 ppm/°C                                                                                    |
| Operating temperature range:                                                                         | −55 °C to +125 °C                                                                             |

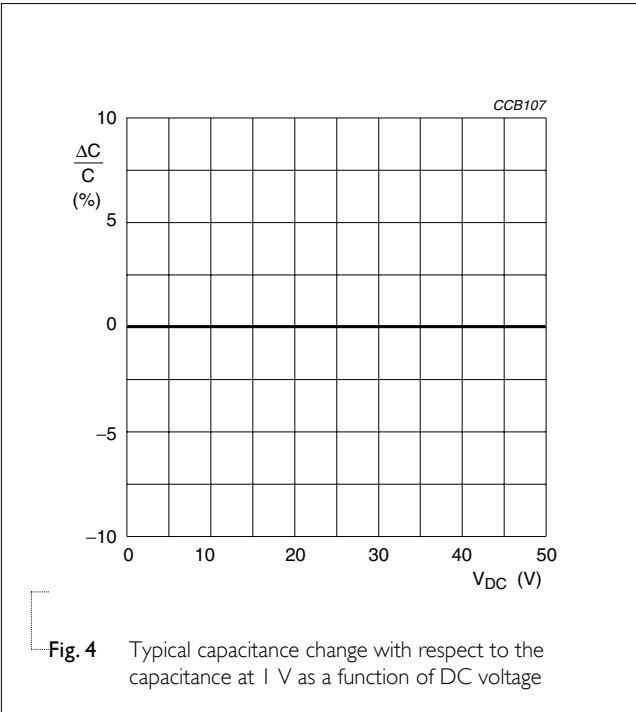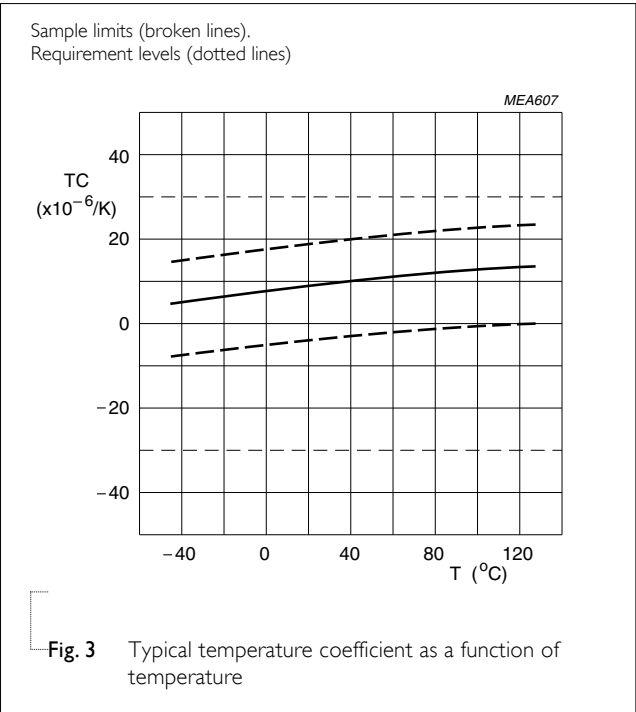

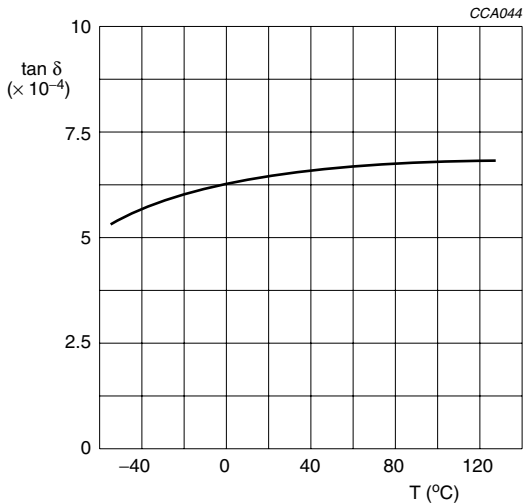


Fig. 5 Typical tan δ as a function of temperature

SOLDERING RECOMMENDATION

Table 8

| SOLDERING METHOD | SIZE 0402 | 0603     | 0805     | 1206     | ≥ 1210      |
|------------------|-----------|----------|----------|----------|-------------|
| Reflow           | ≥ 0.1 μF  | ≥ 1.0 μF | ≥ 2.2 μF | ≥ 4.7 μF | Reflow only |
| Reflow/Wave      | < 0.1 μF  | < 1.0 μF | < 2.2 μF | < 4.7 μF | ---         |

**TESTS AND REQUIREMENTS****Table 9** Test procedures and requirements

| TEST                                  | TEST METHOD     | PROCEDURE                                                                                                                                                       | REQUIREMENTS                                                                                                                          |
|---------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Mounting                              | IEC 60384-21/22 | 4.3 The capacitors may be mounted on printed-circuit boards or ceramic substrates                                                                               | No visible damage                                                                                                                     |
| Visual inspection and dimension check |                 | 4.4 Any applicable method using $\times 10$ magnification                                                                                                       | In accordance with specification                                                                                                      |
| Capacitance                           |                 | 4.5.1 Class I:<br>f = 1 MHz for $C \leq 1$ nF, measuring at voltage 1 $V_{rms}$ at 20 °C<br>f = 1 KHz for $C > 1$ nF, measuring at voltage 1 $V_{rms}$ at 20 °C | Within specified tolerance                                                                                                            |
| Dissipation factor (D.F.)             |                 | 4.5.2 Class I:<br>f = 1 MHz for $C \leq 1$ nF, measuring at voltage 1 $V_{rms}$ at 20 °C<br>f = 1 KHz for $C > 1$ nF, measuring at voltage 1 $V_{rms}$ at 20 °C | In accordance with specification                                                                                                      |
| Insulation resistance                 |                 | 4.5.3 At $U_r$ (DC) for 1 minute                                                                                                                                | In accordance with specification                                                                                                      |
| Temperature coefficient               |                 | 4.6 Class I:<br>Between minimum and maximum temperature<br>NP0: -55 °C to +125 °C<br>Normal Temperature: 20 °C                                                  | <General purpose series><br>$\Delta C/C$ :<br>Class I:<br>NP0: $\pm 30$ ppm/°C                                                        |
| Adhesion                              |                 | 4.7 A force applied for 10 seconds to the line joining the terminations and in a plane parallel to the substrate                                                | Force<br>size $\geq 0603$ : 5N<br>size = 0402: 2.5N<br>size = 0201: 1N                                                                |
| Bond strength of plating on end face  |                 | 4.8 Mounting in accordance with IEC 60384-22 paragraph 4.3<br><br>Conditions: bending 1 mm at a rate of 1 mm/s, radius jig 340 mm                               | No visible damage<br><br><General purpose series><br>$\Delta C/C$<br>Class I:<br>NP0: within $\pm 1\%$ or 0.5 pF whichever is greater |

| TEST                         | TEST METHOD     | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                           |
|------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resistance to soldering heat | IEC 60384-21/22 | 4.9<br>Precondition: 150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature<br>Preheating: for size ≤ 1206: 120 °C to 150 °C for 1 minute<br>Preheating: for size >1206: 100 °C to 120 °C for 1 minute and 170 °C to 200 °C for 1 minute<br>Solder bath temperature: 260 ±5 °C<br>Dipping time: 10 ±0.5 seconds<br>Recovery time: 24 ±2 hours                                                                                                                                                            | Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned<br><br><div>&lt;General purpose series&gt;</div> <div>ΔC/C</div> <div>Class I:</div> <div>NP0: within ±0.5% or 0.5 pF whichever is greater</div> <div>D.F. within initial specified value</div> <div>R<sub>ins</sub> within initial specified value</div> |
| Solderability                |                 | 4.10<br>Preheated the temperature of 80 °C to 140 °C and maintained for 30 seconds to 60 seconds.<br><br>Test conditions for lead containing solder alloy<br>Temperature: 235 ±5 °C<br>Dipping time: 2 ±0.2 seconds<br>Depth of immersion: 10 mm<br>Alloy Composition: 60/40 Sn/Pb<br>Number of immersions: 1<br><br>Test conditions for lead-free containing solder alloy<br>Temperature: 245 ±5 °C<br>Dipping time: 3 ±0.3 seconds<br>Depth of immersion: 10 mm<br>Alloy Composition: SAC305<br>Number of immersions: 1 | The solder should cover over 95% of the critical area of each termination                                                                                                                                                                                                                                                                              |
| Rapid change of temperature  |                 | 4.11<br>Preconditioning:<br>150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature<br><br>5 cycles with following detail:<br>30 minutes at lower category temperature<br>30 minutes at upper category temperature<br><br>Recovery time 24 ±2 hours                                                                                                                                                                                                                                                       | No visual damage<br><br><div>&lt;General purpose series&gt;</div> <div>ΔC/C</div> <div>Class I:</div> <div>NP0: within ±1% or 1 pF whichever is greater</div> <div>D.F. meet initial specified value</div> <div>R<sub>ins</sub> meet initial specified value</div>                                                                                     |

| TEST                         | TEST METHOD         | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | REQUIREMENTS                                                                                                                                                                                                                                                                                                    |
|------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Damp heat<br>with $U_r$ load | IEC 60384-<br>21/22 | 4.13 <ol style="list-style-type: none"> <li>1. Preconditioning, class 2 only:<br/>150 +0/-10 °C /1 hour, then keep for<br/>24 ±1 hour at room temp</li> <li>2. Initial measure:<br/>Spec: refer to initial spec C, D, IR</li> <li>3. Damp heat test:<br/>500 ±12 hours at 40 ±2 °C;<br/>90 to 95% R.H. 1.0 <math>U_r</math> applied</li> <li>4. Recovery:<br/>Class I: 6 to 24 hours</li> <li>5. Final measure: C, D, IR</li> </ol> <p>P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be preconditioned according to "IEC 60384 4.1" and then the requirement shall be met.</p>                                                   | No visual damage after recovery<br><br><b>&lt;General purpose series&gt;</b><br>$\Delta C/C$<br>Class I:<br>NP0: within ±2% or 1 pF<br>whichever is greater<br>D.F.<br>Class I:<br>NP0: ≤ 2 × specified value<br>$R_{ins}$<br>Class I:<br>NP0: ≥ 2,500 MΩ or $R_{ins} \times C_r \geq 25s$<br>whichever is less |
| Endurance                    |                     | 4.14 <ol style="list-style-type: none"> <li>1. Preconditioning, class 2 only:<br/>150 +0/-10 °C /1 hour, then keep for<br/>24 ±1 hour at room temp</li> <li>2. Initial measure:<br/>Spec: refer to initial spec C, D, IR</li> <li>3. Endurance test:<br/>Temperature: NP0: 125 °C<br/>Specified stress voltage applied for 1,000 hours:<br/>Applied 2.0 × <math>U_r</math> for general product.</li> <li>4. Recovery time: 24 ±2 hours</li> <li>5. Final measure: C, D, IR</li> </ol> <p>P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be preconditioned according to "IEC 60384 4.1" and then the requirement shall be met.</p> | No visual damage<br><br><b>&lt;General purpose series&gt;</b><br>$\Delta C/C$<br>Class I:<br>NP0: within ±2% or 1 pF<br>whichever is greater<br>D.F.<br>Class I:<br>NP0: ≤ 2 × specified value<br>$R_{ins}$<br>Class I:<br>NP0: ≥ 4,000 MΩ or $R_{ins} \times C_r \geq 40s$<br>whichever is less                |
| Voltage proof                | IEC 60384-I         | 4.6 <p>Specified stress voltage applied for 1 minute</p> $U_r \leq 100$ V: series applied 2.5 $U_r$<br>$100$ V < $U_r \leq 200$ V series applied (1.5 $U_r$ + 100)<br>$200$ V < $U_r \leq 500$ V series applied (1.3 $U_r$ + 100)<br>$U_r > 500$ V: 1.3 $U_r$<br>I: 7.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                      | No breakdown or flashover                                                                                                                                                                                                                                                                                       |

REVISION HISTORY

| REVISION  | DATE         | CHANGE NOTIFICATION | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------|--------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version 8 | Aug 05, 2011 |                     | - Product range updated                                                                                                                                                                                                                                                                                                                                                                                           |
| Version 7 | Jun 14, 2011 | -                   | - Size I210 T=1.0mm SPQ added<br>- Dimension updated                                                                                                                                                                                                                                                                                                                                                              |
| Version 6 | Jan 06, 2011 | -                   | - Dimension updated                                                                                                                                                                                                                                                                                                                                                                                               |
| Version 5 | Dec 29, 2010 | -                   | - Dimension updated                                                                                                                                                                                                                                                                                                                                                                                               |
| Version 4 | Nov 23, 2010 | -                   | - Dimension updated                                                                                                                                                                                                                                                                                                                                                                                               |
| Version 3 | Apr 20, 2010 | -                   | - The statement of "Halogen Free" on the cover added<br>- Dimension updated                                                                                                                                                                                                                                                                                                                                       |
| Version 2 | Oct 26, 2009 | -                   | - Typo updated                                                                                                                                                                                                                                                                                                                                                                                                    |
| Version 1 | Jun 02, 2009 | -                   | - I2NC code updated                                                                                                                                                                                                                                                                                                                                                                                               |
| Version 0 | Apr 15, 2009 | -                   | - New datasheet for general purpose NP0 series with RoHS compliant<br>- Replace the "16V to 50V" part of pdf files: NP0_16V_7, NP0_16V-to-100V_6, NP0_25V_7, NP0_50-to-500V_11<br>- Combine 0201 from pdf files: UP-NP0X5RX7RY5V_0201_6.3-to-50V_2 and UY-NP0X5RX7RY5V_0201_6.3-to-50V_2<br>- Define global part number<br>- Description of "Halogen Free compliant" added<br>- Test method and procedure updated |