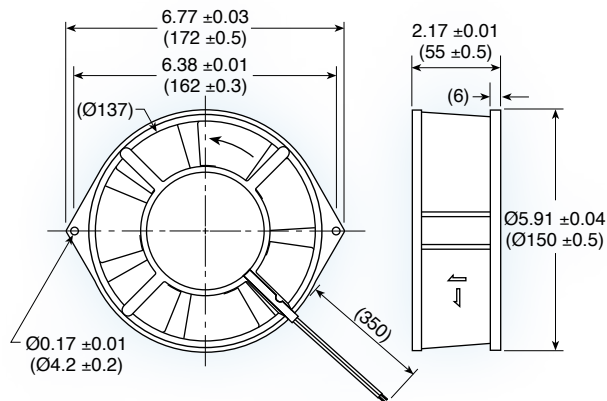


UF15KCR series

**(172 x 150 x 55 mm)**

6.77 x 5.91 x 2.17 inches

Features: capacitor start motor; reverse air flow (air intake over struts); Class B insulation

Operating voltage: 115 or 230 VAC

Construction: aluminum die cast frame; UL94V-0 PBT impeller

Bearing option: motor quality ball bearings



Motor: capacitor start

Air Flow: intake over struts

Connection: terminal or 22 AWG lead wires

Protection: thermal

LEAD WIRE

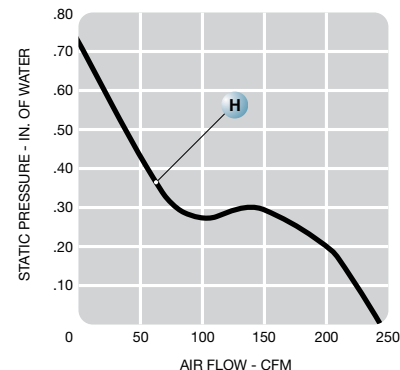

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight oz
							M ³ /Min.	CFM	MM	INCH		
UF15KCR12 - __H	115	60	30	0.25	0.58	3,400	6.8	241	18.5	0.73	66	38
UF15KCR23 - __H	230	60	31	0.13	0.28	3,400	6.8	241	18.5	0.73	66	38