

Rocker Switch

Single Pole

SR Series – SRJ



Features


- Self-locking tabs
- Minimum 50,000 operations mechanical life
- RoHS compliant

Standard Parts¹


North America and Europe			
SRJ22A3BBBNN	SRJ23A3BBBNN	SRJ24A3BBBNN	SRJ24A3HBBNN

¹The part number configuration matrix below provides details to the part numbers above. For configurable part numbers that are not listed above, contact the factory or your distributor.


Part Number Breakdown

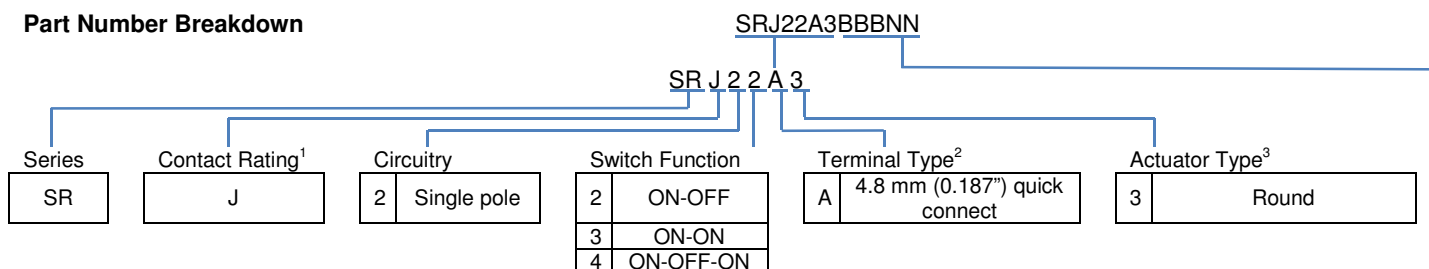

¹See Electrical Specifications section

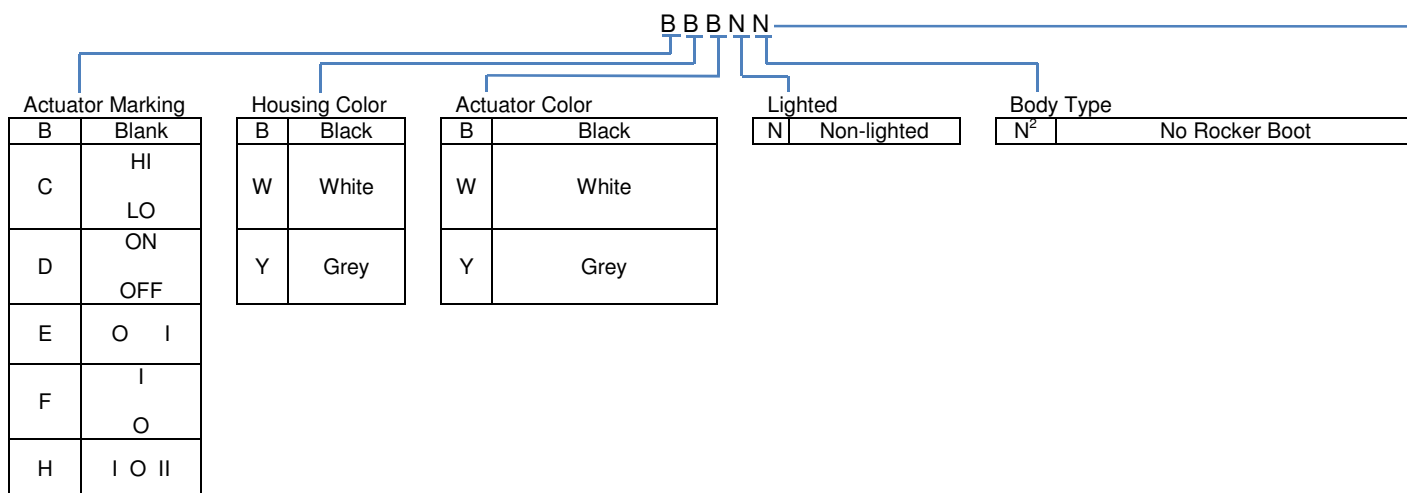

²A splash-proof boot can be ordered separately as part number 00150751

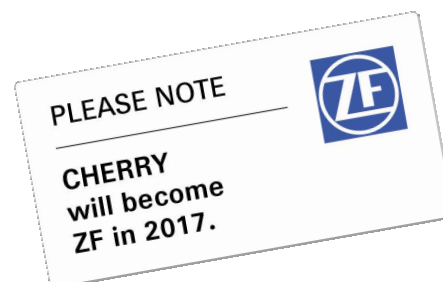


Electrical Specifications

Inrush Rating – 2 Position		48 A
Inrush Rating – 3 Position		24 A
Dielectric Strength		1000 VAC for 1 minute
Insulation Resistance		100 MΩ min at 500 VDC
Initial Contact Resistance		0.020 Ω max
Switch Function	EN61058-1 Rating	UL General Purpose Rating
All	N/A	20 A 125 VAC / 12 A 250 VAC
Electrical Life at Rated Load	VDE	UL
Minimum Operations	N/A	6,000
UL File No: E23301		




Material and Environmental Specifications

Actuator	Nylon 66 94V-2	
Base	Nylon 66 94V-2	
Spring	Steel Wire	
Contacts	Silver Alloy	
Movable Arm	Silver-Plated Copper Alloy	
Terminals	Tin-Plated Copper Alloy	
Operating Temperature Range	-20 °C to +65 °C (-4 °F to +149 °F)	

Circuitry and Switch Functions

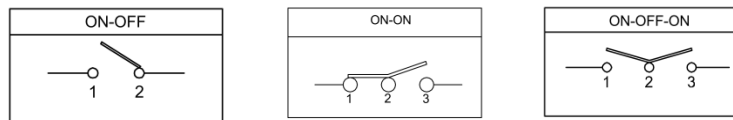

Dimensions mm (inches)

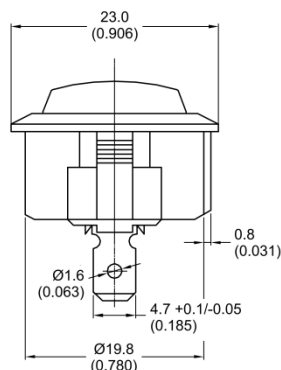

NOTE: TOLERANCES ± 0.3 (0.012) UNLESS OTHERWISE SPECIFIED

