

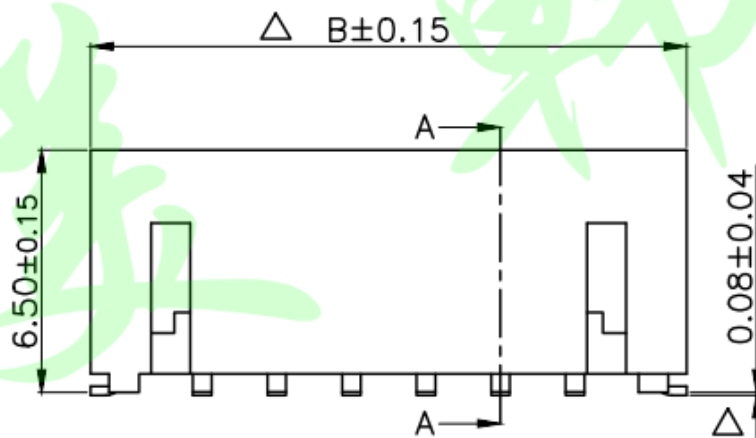


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2016.8.13

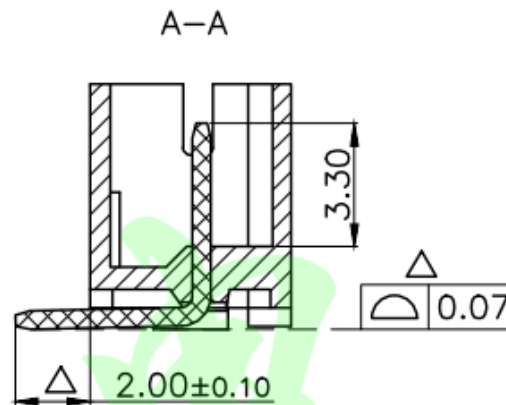

★插针焊片焊接面高出塑件尺寸

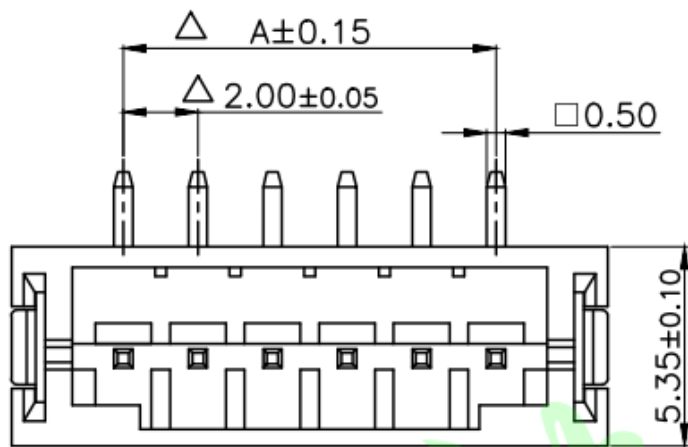

Specifications / 技术规格:

Current rating: 2A
 额定电流: 2A
 Voltage rating: 125 V AC, DC
 额定电压: 125V AC, DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC 1Min
 耐电压: 800V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Brass (Sn plating)
 接触铜针材料: 黄铜(镀锡)
 Soldering Terminal: Brass (Sn plating)
 焊片材料: 黄铜(镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)	
		A	B
2	2.0-2ALT	2.0	8.0
3	2.0-3ALT	4.0	10.0
4	2.0-4ALT	6.0	12.0
5	2.0-5ALT	8.0	14.0
6	2.0-6ALT	10.0	16.0
16	2.0-16ALT	30.0	36.0

东莞市美韩电子科技有限公司
 Dongguan Usakro Electronic Technology Co., Ltd.

GENERAL TOLERANCE

X.* ± 3'	.XXX	± 0.10
.X* ± 2'	.XX	± 0.15
.XX* ± 1'	.X	± 0.25
.XXX* ± 0.5'	X.	± 0.35

DESIGN: WWH

DATE: 2016.8.13

DWG. NO.

CHECKED:

DATE: 2016.8.13

AUDITED:

DATE: 2016.8.13

APPROVED:

DATE: 2016.8.13

PART NO.

UK-2.0-2ALT

TITLE.

PH2.0立贴

REV.	UNIT.	SCALE.	UNIT.	SCALE.
A	MM	1:1	MM	1:1

