


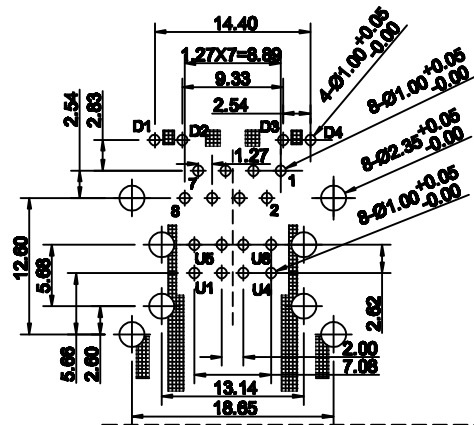
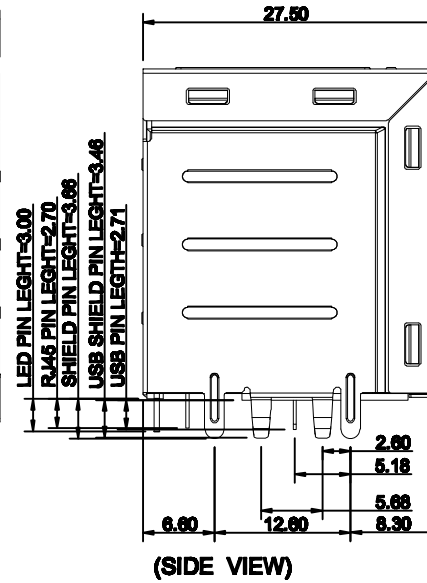
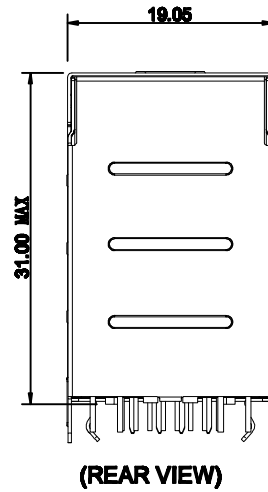


# RoHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0	ECN20170908001	NA	新版发行	2017.09.08	Jerry

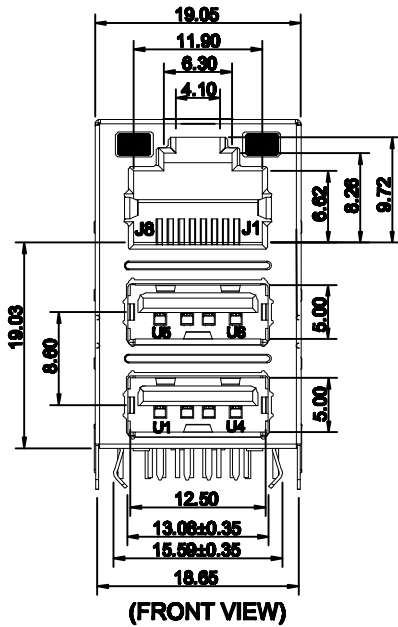

**NOTE:**

**1.MATERIAL:**

Housing: High temp. Thermo plastics,UL94V-0.  
Contact:Copper Alloy.  
Shell: Steel or Spcc.


**2.Electrical performance:**

Voltage Current Rating:1.5 AMP. 30V AC  
Insulation Resistance:1000M Ω Min.  
Contact Resistance:40 m Ω Max.  
Dielectric Withstanding Voltage:500V AC

**3.Temperature Range:-40℃ to +85℃**

**4.FINISH:**

Contact:Tin Plating 100u" on solder tail area,  
RJ45 Gold plating Flash on contact area.  
USB Gold plating Flash on contact area,  
30u" min Ni underplating over all.

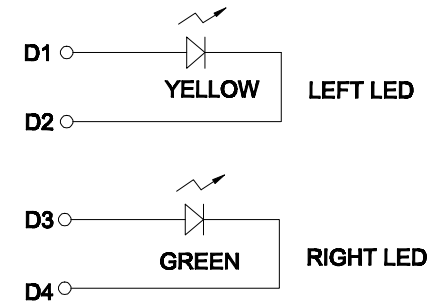

 <b>UNIT: mm [inch]</b> <b>TOLERANCE:</b> X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	<b>深圳市华灿天禄电子有限公司</b>	
	<b>DESIGN:</b> Jerry Li	<b>PART NAME:</b> RJ45+独立双层USB2.0带灯无弹左黄右绿
	<b>CHECKED:</b> Jerry Li	<b>PART NO.</b> HC-RJ45-2USB-02
	<b>APPROVED:</b> J Mou	<b>DRAW NO.</b>
<b>SCALE:1:1 SIZE:A4</b>	<b>SHEET NO.</b> 01 OF 01	