



Features

- 1.Uni-directional data transmission using plastic fiber
- 2.Signal transmission speed
:MAX. 13.2 Mbps (NRZ signal)
- 3.Operating voltage :4.75 to 5.25 V
- 4.TTL compatible
- 5.Suitable for MOF-T3C2 Transmitter

Outline Dimensions

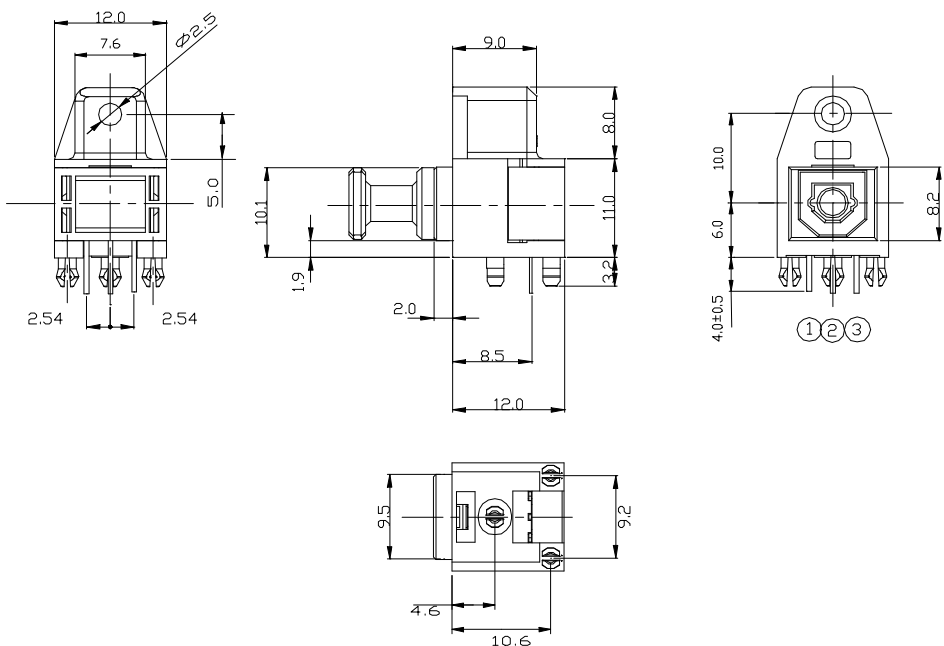

Recommended drilling as viewd from the soldering face

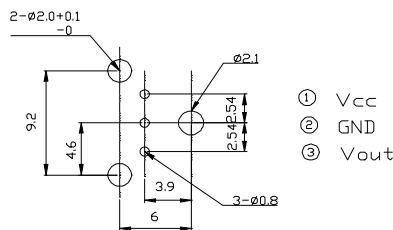

NOTES:
Tolerance is ± 0.3 mm unless otherwise noted.

Absolute Maximum Ratings @ T_A=25°C


Parameter	Symbol	Rating	Unit
Supply voltage	V _{cc}	-0.5 to + 6	V
High Level Output Current	I _{OH}	-1	mA
Low Level Output Current	I _{OL}	5	mA
Operating temperature	T _{opr}	-20 to +70	°C
Storage temperature	T _{stg}	-30 to +80	°C
Soldering Temperature	T _{SOL}	260*	°C

* For 5s (1 times or less)

Recommended Operating Conditions

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating supply voltage	V_{cc}	4.75	5.0	5.25	V
Operating transfer rate	T	0.1	---	13.2	Mbps
receiver input optical power level	P_c	-24	---	-14.5	dBm


Recommended Connection Method

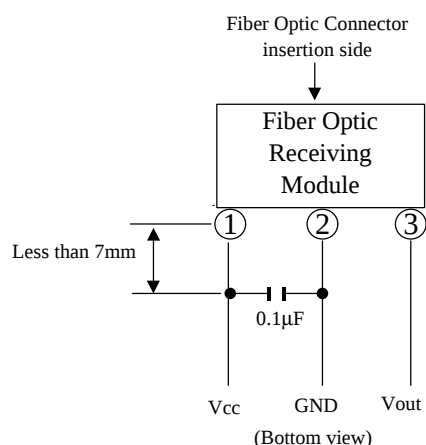

Electro-Optical Characteristics


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Dissipation current	I_{cc}	Refer to Fig. 1	---	15	40	mA
High level output voltage	V_{OH}	Refer to Fig. 2	2.4	4.8	---	V
Low level output voltage	V_{OL}	Refer to Fig. 2	---	0.2	0.4	V
Rise time	t_r	Refer to Fig. 2	---	10	20	ns
Fall time	t_f	Refer to Fig. 2	---	10	20	ns
Low → High delay time	t_{pLH}	Refer to Fig. 2	---	100	180	ns
High → Low delay time	t_{pHL}	Refer to Fig. 2	---	100	180	ns
Pulse width distortion	Δ_{tw}	Refer to Fig. 2	-15	---	+15	ns

Fig. 1 Measuring Method of Supply Current.

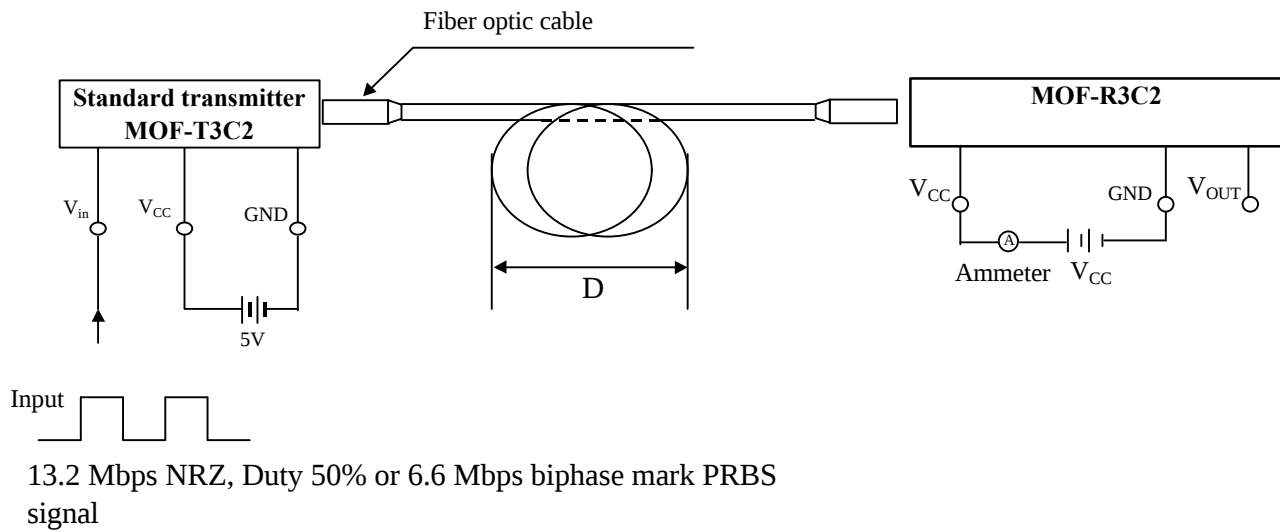

- Notes (1) $V_{cc}=5.0V$ (State of operating)
 (2) To bundle up the standard fiber optic cable, make it into a loop with the diameter $D=10cm$ or more.
 (3) $P_c = -14.5 \text{ dBm}$
 (4) Measured on an ammeter.

Fig. 2 Measuring Method of Output Voltage and Pulse Response

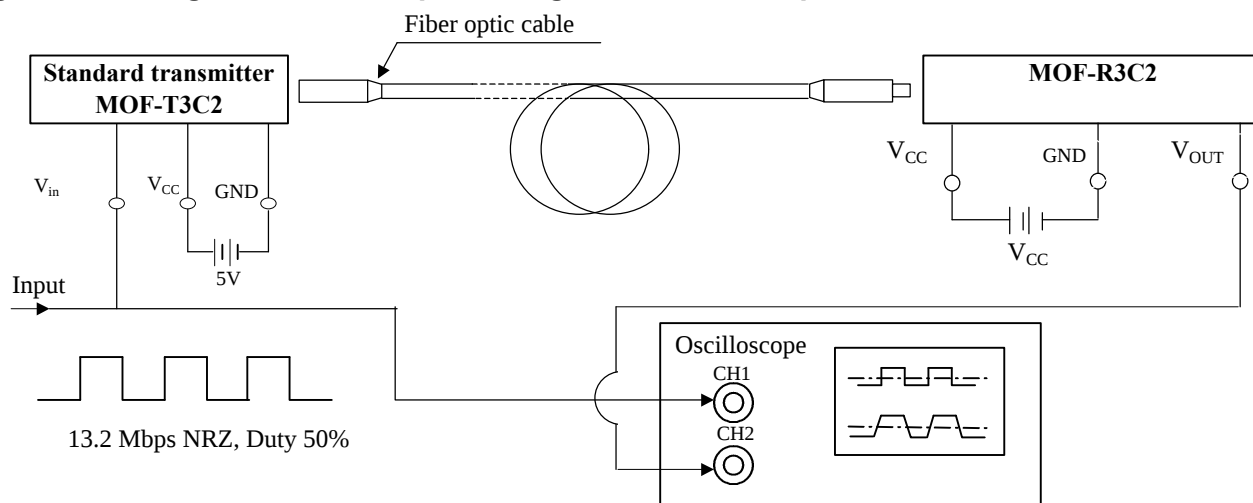

Test item

Test item	Symbol
Low → High pulse delay time	t_{PLH}
High → Low pulse delay time	t_{PHL}
Rise time	t_r
Fall time	t_f
Pulse width distortion $\Delta tw = t_{PHL} - t_{PLH}$	Δtw
High level output voltage	V_{OH}
Low level output voltage	V_{OL}

