



Network Management Module




Overview

The Fiber Driver® EM316NM Network Management Module provides monitoring and management for a Fiber Driver chassis system. It polls each active Fiber Driver module in its chassis using public and MRV MIBs for critical information such as MAC addresses, module types, and link status. The management module also enables module loopback testing and provides the ability to configure parameters such as the system IP address. It monitors for loss of signal on data ports, temperature out of range, power supply status, fan status, and transmit and receive signal detection. It also supports an extensive array of traps with automatic e-mail notification and system messages.

Features

- Remote configuration and monitoring of a Fiber Driver chassis and installed Fiber Driver modules
- Local management access through an RS-232 command line interface (CLI)
- Remote management through Telnet or SNMP
- Remote management with MegaVision Pro®, MRV's own comprehensive network management system (NMS), or any standard NMS system
- Event traps with e-mail notification
- Ping, module loopback diagnostics, and module reset support
- Fiber Driver chassis compatibility with two-slot, three-slot, four-slot, and sixteen-slot modules
- Front panel LED status indicators for power, transmit, receive, and link

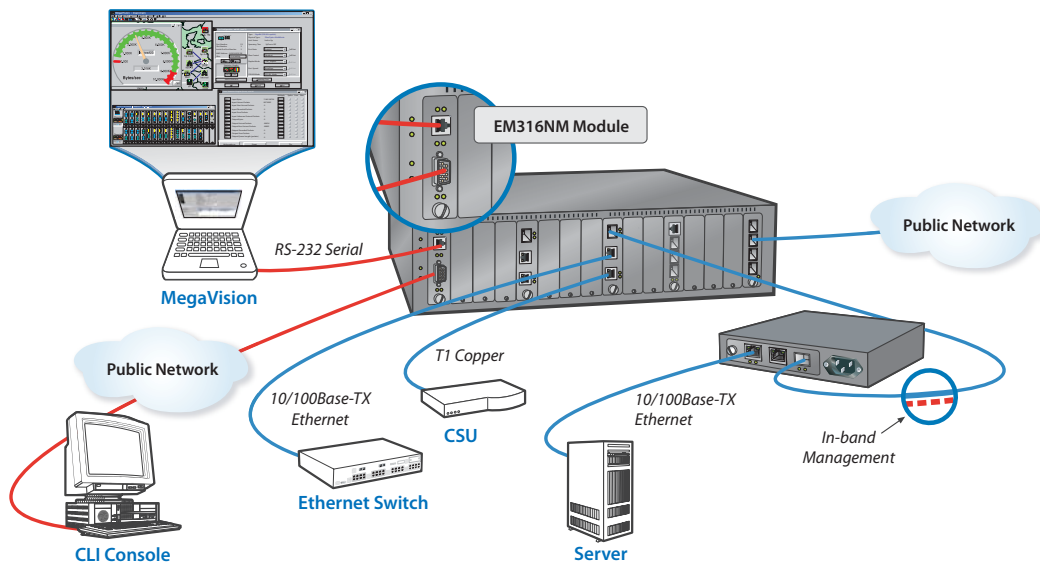



The EM316NM module provides three ways to manage a Fiber Driver chassis, modules, and fiber infrastructure.

- 1) Out-of-band management using a command line interface (CLI) through the RS-232 connector.
- 2) In-band management using Telnet (through the 10BaseT Ethernet connector) from the Ethernet network.
- 3) SNMP (In-band management) through Communications' Mega Vision Pro® or any standard network management system using SNMP.

Configurable Fiber Driver Information includes:

- Trap Message levels
- IP Address
- Port controls and provisioning
- Module Resets
- Other control features

Information Readable by Management includes:

- Link Status
- In Range Temperature
- Module Type
- Card ID
- Revision Number
- Slot and Port Number
- Power Supply Status
- Additional information as per specific module

Contact your nearest authorized MRV representative for more information on these and other Fiber Driver products.

Physical Specifications:	
Operating Temperature Range:	0°C to 50°C (32°F to 122°F)
Storage Temperature:	-40°C to 70°C (-40°F to 158°F)
Relative Humidity:	85% maximum, non-condensing
Physical Dimensions:	25 mm x 75 mm x 175 mm deep (1" x 3" x 7" deep)
Weight:	Approximately 145 g (5.1 oz)
Regulatory Compliance:	FCC Part 15 (Class A); IC (Class A); EMC Directive: Emission (Class A) and Immunity;
	RoHS Directive, ETSI, NEBS, C-Tick
	Contact your sales representative for details.

Ordering Info	Part Number	Description
		EM316NM

MRV has more than 50 offices throughout the world. Addresses, phone numbers, and fax numbers are listed at www.mrv.com. Please e-mail us at sales@mrv.com or call us for assistance.

MRV (West Coast USA)
20415 Nordhoff St.
Chatsworth, CA 91311
800-338-5316
818-773-0900

MRV (East Coast USA)
295 Foster St.
Littleton, MA 01460
800-338-5316
978-952-4700

MRV (International)
Business Park Moerfelden
Waldeckerstrasse 13
64546 Moerfelden-Walldorf
Germany
Tel. (49) 6105/2070
Fax. (49) 6105/207-100

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.