
Product data sheet
Characteristics

8910DP42V02
Contactor, Definite Purpose, 40A, 2 pole, 110/120 VAC 50/60 Hz coil, open

Product availability : Stock - Normally stocked in distribution facility

Price* : 83.75 USD

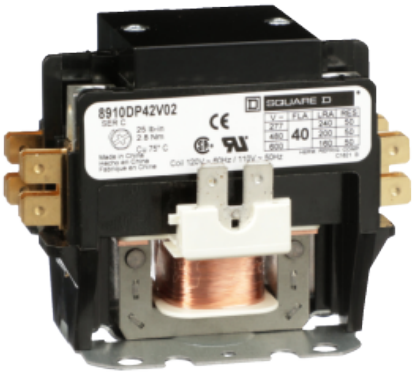

Main

Product or component type	Definite Purpose Contactor
Line Rated Current	40 A
Number of Poles	2P
Pole contact composition	2 NO
Range of product	DP

Complementary

Maximum Horse Power Rating	2 hp 115 V AC, 1 phase 5 hp 230 V AC, 1 phase
Locked rotor rated current	240 A 277 V AC 200 A 460 V AC 160 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	1 phase
Electrical connection	Box lugs Quick connect terminals

Environment

Product certifications	UL Recognized CSA

Ordering and shipping details

Category	21358 - 8910 DP 42
Discount Schedule	CP1B

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

GTIN	00785901024187
Nbr. of units in pkg.	1
Package weight(Lbs)	0.57 lb(US) (0.26 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.30 in (5.842 cm)
Package 1 width	2.60 in (6.604 cm)
Package 1 Length	3.40 in (8.636 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	12
Package 2 Weight	7.14 lb(US) (3.239 kg)
Package 2 Height	5.50 in (13.97 cm)
Package 2 width	7.30 in (18.542 cm)
Package 2 Length	7.20 in (18.288 cm)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months