CS0034 (M1)
Technical Datasheet



Features

- Cable connection for powering military devices

Applications


- Covert Operations
- Homeland Security
- Surveillance

Technical Specifications	
Part No.	CS0034
NSN	6135-99-425-1573
Voltage Range	10.5 to 14.4V
Average Voltage	11 to 12V
Nominal Capacity	238Ah
Max. Discharge	5.0A continuous
Pulse Capability	N/A
Weight	10kg max.
Operating Temperature	-15°C to 55°C
Storage Temperature	-32°C to 70°C
Exterior/Housing	Moulded ABS case
Terminals/Connector	Amphenol 62GB-56T08-33SN
Safety	Polyswitch Material Safety Datasheet - MSDS095 Safety Guide UBM-5135
Transportation	Class 9 - U.S. and International (see note)
Export License	ECCN 3A611.x export license required to export from U.S.
Harmonized Tariff Schedule	8506.50.0000


Note	A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800
©2020 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.
The information contained herein is for reference only and does not constitute a warranty of performance. • 09 SEP 20 UBM-05285 Rev C


Dimensions

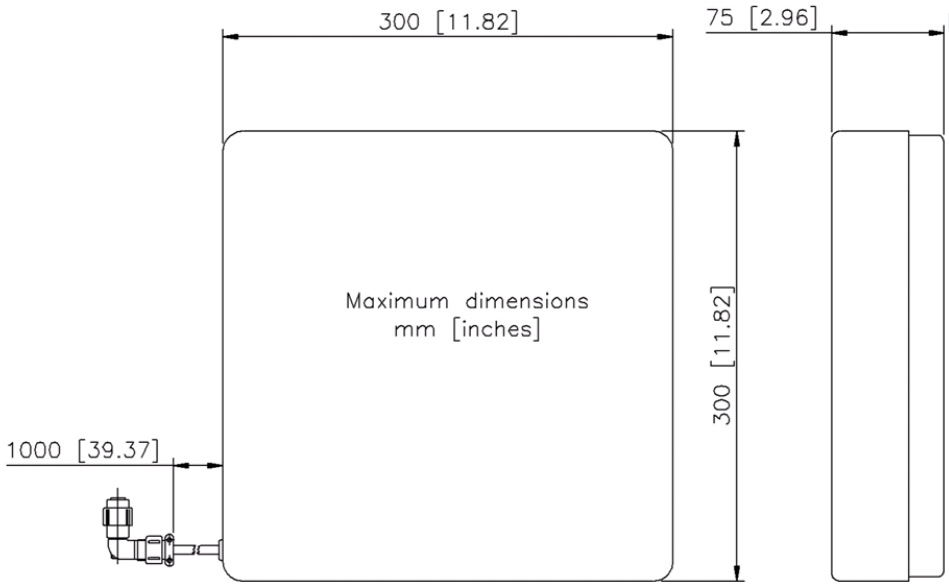

Performance Graphs

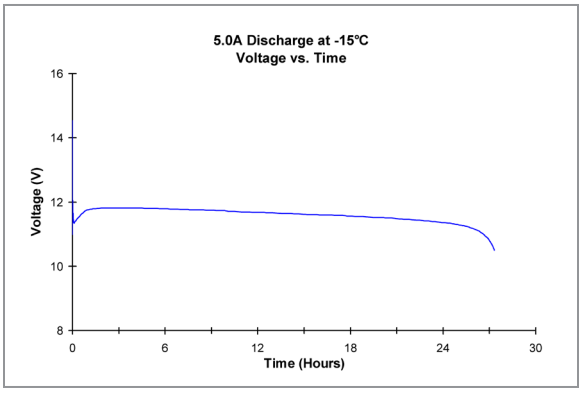

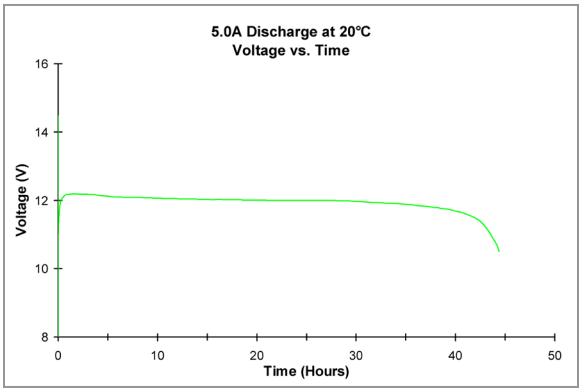

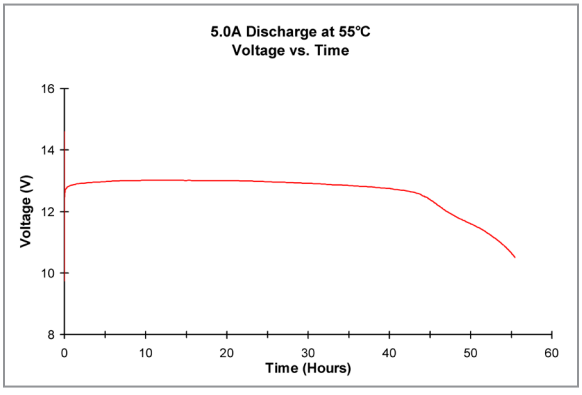

Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800
©2020 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.
The information contained herein is for reference only and does not constitute a warranty of performance. • 09 SEP 20 UBM-05285 Rev C