



# Specific Lighting Product Data Sheet

## M08 CoB Product Series Data Sheet

Spec No.: DS23-2016-0114

Effective Date: 12/15/2016

Revision: -

**LITE-ON DCC**

**RELEASE**

BNS-OD-FC001/A4

# SPECIFIC LIGHTING M08 CoB Product Series

## 1. Description

The LiteON CoB Product series is a revolutionary, energy efficient and ultra-compact new light source, combining the lifetime and reliability advantages of Light Emitting Diodes with the brightness of conventional lighting. It gives you total design freedom and unmatched brightness, creating a new opportunities for solid state lighting to displace conventional lighting technologies.

### 1.1 Features

- Compact high flux density light source
- Uniform high quality illumination
- Streamlined thermal path
- MacAdam compliant binning structure  
More energy efficient than incandescent, halogen and fluorescent lamps
- Instant light with unlimited dimming
- RoHS compliant and Pb free

### 1.2 Benefits Features

- Enhanced optical control
- Clean white light without pixilation
- Uniform consistent white light
- Significantly reduced thermal resistance and increased operating temperatures
- Lower operating costs
- Reduced maintenance costs

### 1.3 Naming Rule

**L   T   P   L   -   M   0   8   2   X   X   Z   S   X   X   -   X   X**  

Code1
Code2
Code3
Code4
Code5
Code6
Code7

**Code 1: Product Line**

PL: High Power LED

**Code 2: Package Type/Platform**

M08: Metal substrate with 13.5x13.5mm square.

**Code 3: Light Emitting Surface**

2: 9.5mm excluding dam

**Code 4: Product Series**

06: 06 Series  
10: 10 Series  
18: 18 Series

**Code5: Emission Color Characteristics**

Z: White Color Rendering Index 80 Min.

Q: White Color Rendering Index 90 Min.

**Code6: Color Temperature**

27: 2700K at 85degC

30: 3000K at 85degC

40: 4000K at 85degC

Note: The Color Temperature follow ANSI C78.377A Doc.

**Code7: Hue Bin by MacAdam Ellipses Step**

T0: 2700~4000K MacAdam Ellipse / ANSI Bin

## SPECIFIC LIGHTING M08 CoB Product Series


### 1.4 Product List

PN	Series	CCT	CRI	Color Bin			Lumen Bin	
				3SDCM	5SDCM	ANSI	-8%~+8%	-15%~+15%
LTPL-M08206ZS27-T0	6	2700K	80	☆	☆	☆	☆	☆
LTPL-M08206ZS30-T0	6	3000K	80	☆	☆	☆	☆	☆
LTPL-M08206ZS40-T0	6	4000K	80	☆	☆	☆	☆	☆
LTPL-M08210ZS27-T0	10	2700K	80	☆	☆	☆	☆	☆
LTPL-M08210ZS30-T0	10	3000K	80	☆	☆	☆	☆	☆
LTPL-M08210ZS40-T0	10	4000K	80	☆	☆	☆	☆	☆
LTPL-M08218ZS27-T0	18	2700K	80	☆	☆	☆	☆	☆
LTPL-M08218ZS30-T0	18	3000K	80	☆	☆	☆	☆	☆
LTPL-M08218ZS40-T0	18	4000K	80	☆	☆	☆	☆	☆
LTPL-M08206QS30-T0	6	3000K	90	☆	☆	☆	☆	☆
LTPL-M08210QS30-T0	10	3000K	90	☆	☆	☆	☆	☆
LTPL-M08218QS30-T0	18	3000K	90	☆	☆	☆	☆	☆

# SPECIFIC LIGHTING M08 CoB Product Series

## 2. Outline Dimensions


### 2.1 Form Factor of M082 series CoB

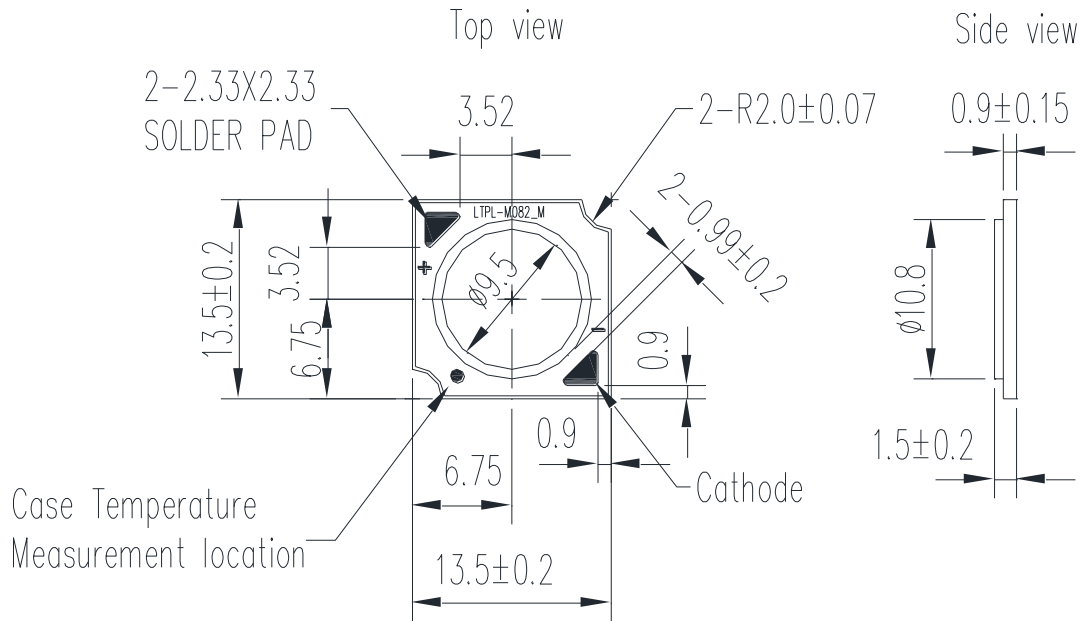

#### Notes

1. All dimensions are in millimeters.
2. Tolerance is ±0.3mm unless otherwise noted.

### 2.2 Internal Equivalent Circuit

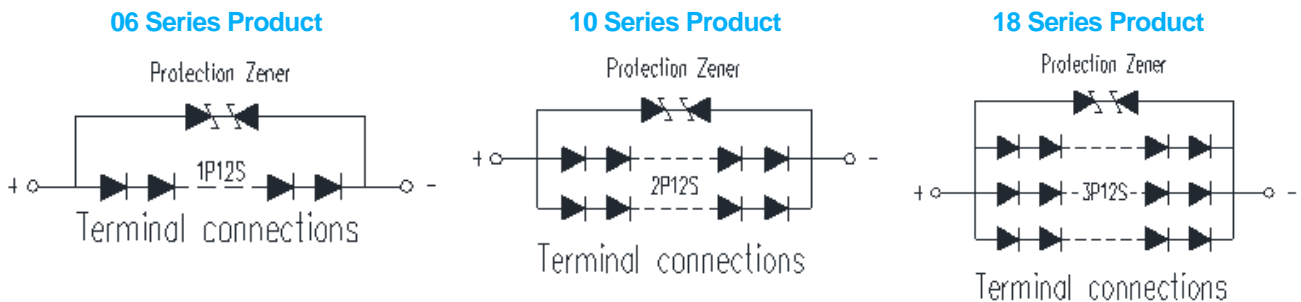

#### Notes

1. LED of equivalent circuit means all series/parallel in CoB package.


## SPECIFIC LIGHTING M08 CoB Product Series

### 3. Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Product Series	Rating	Unit
Power Dissipation	P <sub>O</sub>	6	8	W
		10	16	
		18	24	
Forward Current	I <sub>F</sub>	6	200	mA
		10	400	
		18	600	
Junction Temperature	T <sub>j</sub>		125	°C
Thermal Resistance, Junction-Case	R <sub>th, J-C</sub>	6	2.04	°C/W
		10	1.2	
		18	0.9	
Operating Temperature Range	T <sub>opr</sub>		-40 to 85	°C
Storage Temperature Range	T <sub>stg</sub>		-40 to 100	°C

#### Notes

1. The pulse mode condition is 1/10 duty cycle with 100 msec. pulse width.
2. Forbid to be operated at reverse voltage condition.
3. The unit of Rth is °C/W electrical.
4. The M08 CoB is recommended soldering temperature under 350degC and could not over 3.5sec.

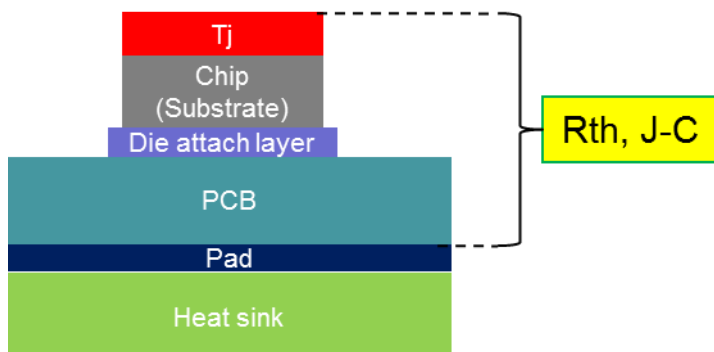

## SPECIFIC LIGHTING M08 CoB Product Series

### 4. Electro-Optical Characteristics

#### 4.1 Typical Performance

Dominant CCT	Product Series	CRI min.	Current (mA)	V <sub>F</sub> (V) @25°C	Flux(lm) @25°C	V <sub>F</sub> (V) @85°C	Flux(lm) @85°C	Eff.(lm/W) @25°C	Eff.(lm/W) @85°C
2700K	6	80	120	36.5	596	34.9	531	136	127
	10	80	240	36.5	1121	34.9	998	128	119
	18	80	360	36.5	1720	34.9	1531	131	122
3000K	6	80	120	36.5	621	34.9	553	142	132
	10	80	240	36.5	1168	34.9	1040	133	124
	18	80	360	36.5	1792	34.9	1595	136	127
4000K	6	80	120	36.5	658	34.9	586	150	140
	10	80	240	36.5	1238	34.9	1102	141	131
	18	80	360	36.5	1900	34.9	1691	145	134
3000K	6	90	120	36.5	515	34.9	459	118	110
	10	90	240	36.5	969	34.9	863	111	103
	18	90	360	36.5	1487	34.9	1324	113	105

#### Notes


1. All of V<sub>F</sub> value are typical, the real bin range please refer page 16 "V<sub>F</sub> Binning Parameter".
2. All of flux value are typical, the real bin range please refer page 13 "Flux Binning Parameter".
3. Tolerance of flux is ±7%, tolerance of CCX/CCY is ±0.007, tolerance of CRI is ±2, and tolerance of V<sub>F</sub> is ±3%.
4. Typical viewing angle is 120deg.

## SPECIFIC LIGHTING M08 CoB Product Series

### 4.2 Forward Current vs. Lumen Voltage

■ 06 Series Product


Current	VF	Lumen (lm)			
		CRI 80			CRI 90
(mA)	(V)	2700K	3000K	4000K	3000K
60	34.0	323	337	357	280
70	34.4	371	387	410	321
80	34.8	419	436	462	362
90	35.2	466	485	514	403
100	35.6	507	529	560	439
110	36.1	554	577	611	479
120	36.5	596	621	658	515
130	36.9	636	663	702	550
140	37.3	677	705	747	585
150	37.7	714	744	788	617
160	38.2	757	788	836	654
170	38.6	793	826	875	686
180	39.0	829	863	915	716
200	39.8	912	950	1007	789

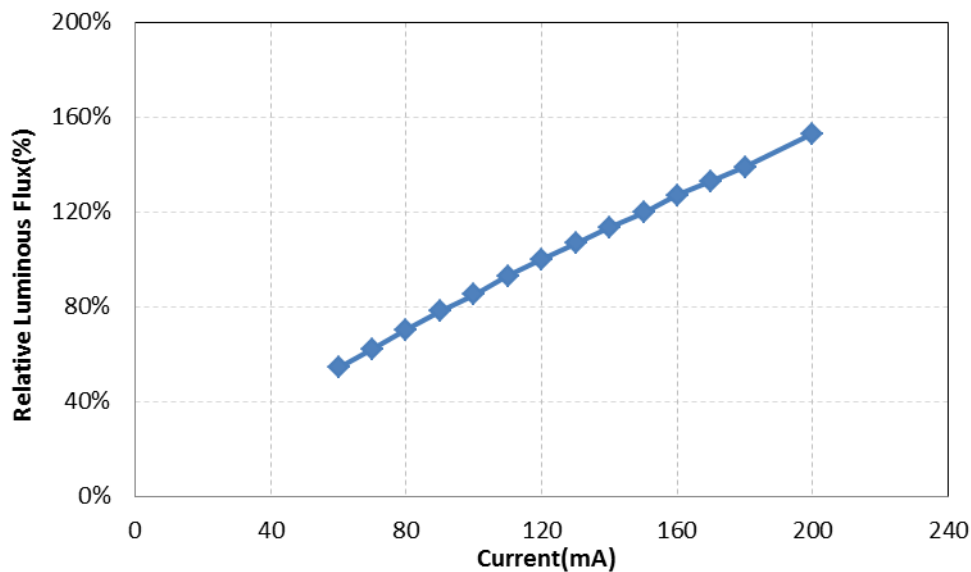

# SPECIFIC LIGHTING M08 CoB Product Series

■ 10 Series Product

Current	VF	Lumen (lm)			
		CRI 80			CRI 90
(mA)	(V)	2700K	3000K	4000K	3000K
120	34.0	608	634	672	526
140	34.4	698	727	771	603
160	34.8	790	822	872	683
180	35.2	877	913	968	758
200	35.6	956	996	1056	827
220	36.1	1040	1084	1149	900
240	36.5	1121	1168	1238	969
260	36.9	1204	1254	1330	1041
280	37.3	1266	1318	1397	1094
300	37.7	1347	1403	1487	1164
320	38.2	1415	1474	1562	1223
340	38.6	1490	1552	1645	1288
360	39.0	1567	1633	1731	1355
400	39.8	1727	1799	1907	1493

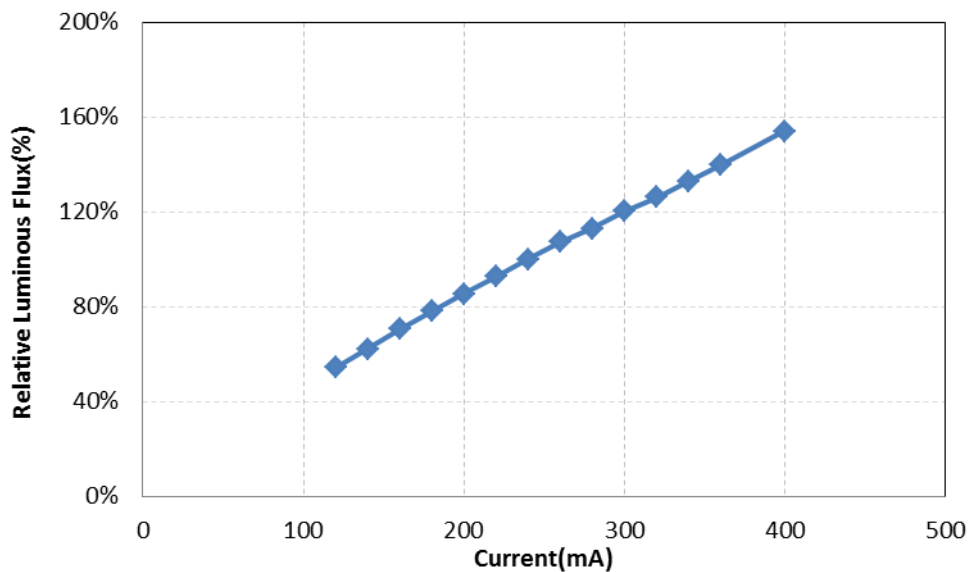




# SPECIFIC LIGHTING M08 CoB Product Series



■ 18 Series Product

Current	VF	Lumen (lm)			
		CRI 80			CRI 90
(mA)	(V)	2700K	3000K	4000K	3000K
150	33.5	800	833	883	691
180	34.0	943	983	1042	816
210	34.4	1089	1134	1202	941
240	34.8	1229	1280	1357	1062
270	35.2	1366	1423	1508	1181
300	35.6	1482	1544	1637	1282
360	36.5	1720	1792	1900	1487
390	36.9	1853	1931	2046	1602
420	37.3	1961	2043	2166	1696
450	37.7	2065	2151	2280	1785
480	38.2	2193	2284	2421	1896
510	38.6	2288	2383	2526	1978
540	39.0	2373	2472	2620	2051
600	39.8	2563	2670	2830	2216

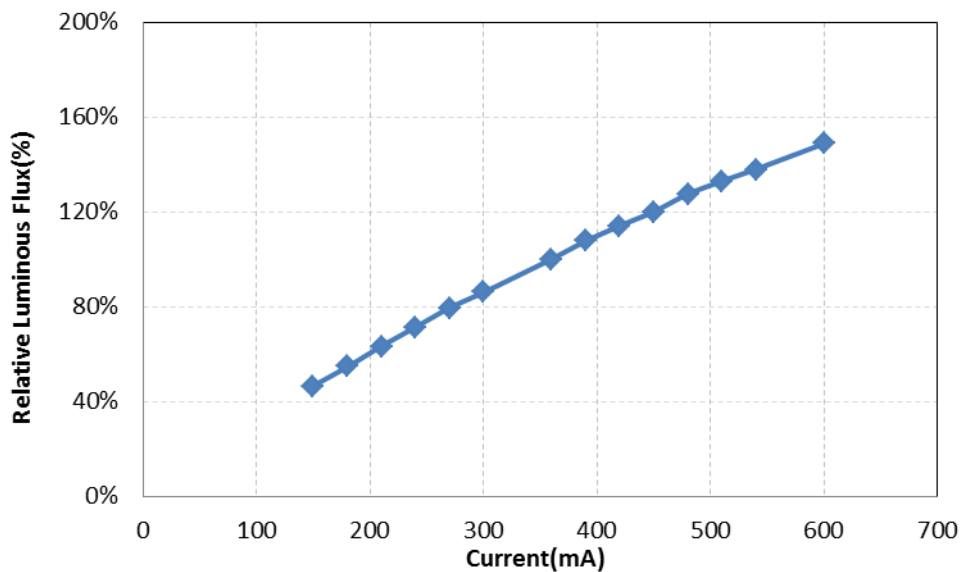


## SPECIFIC LIGHTING M08 CoB Product Series

### 4.3 Relative Spectral Power Distribution at Typical Current

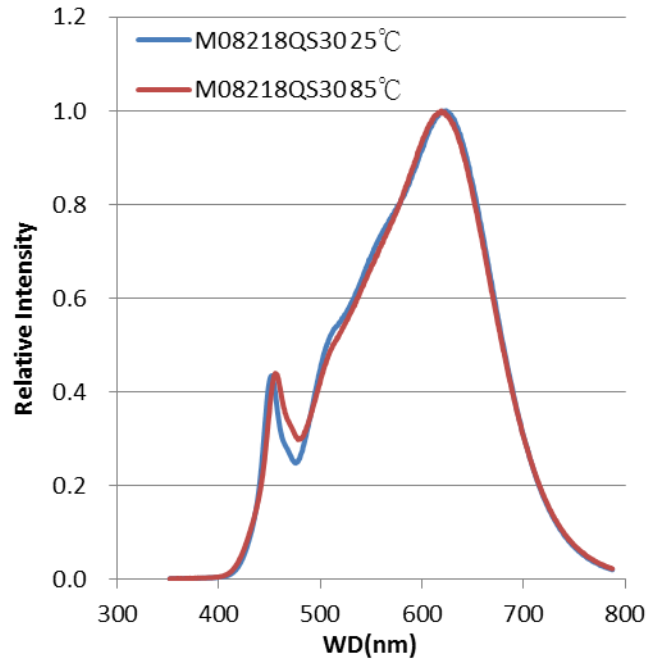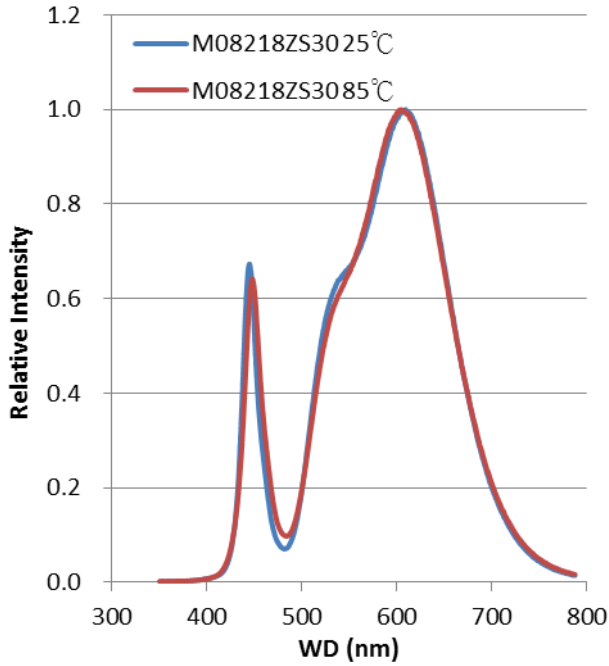


### 4.4 Radiation Characteristics

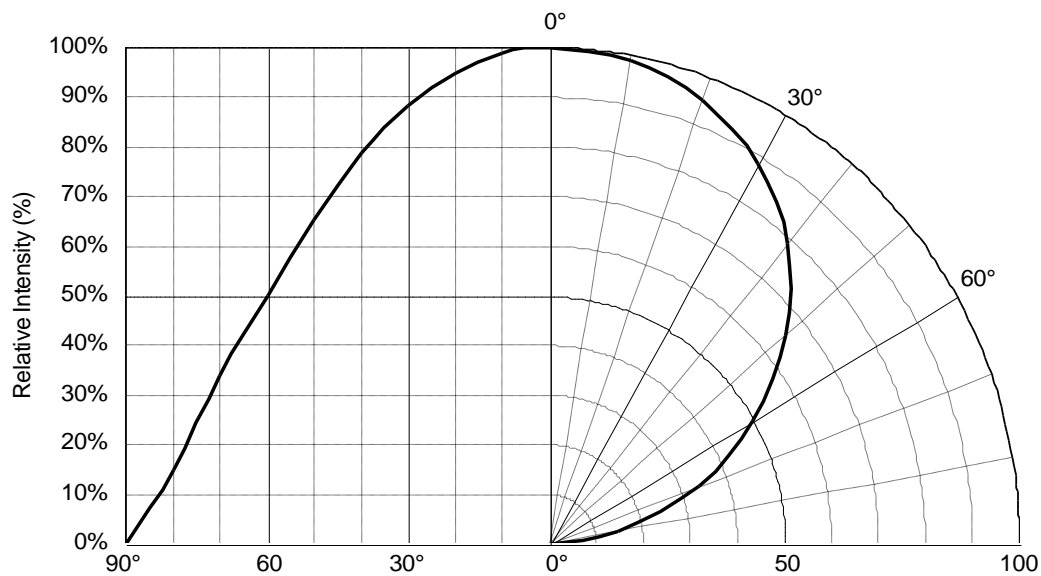


## SPECIFIC LIGHTING M08 CoB Product Series

### 4.5 Forward Current vs. Forward Voltage

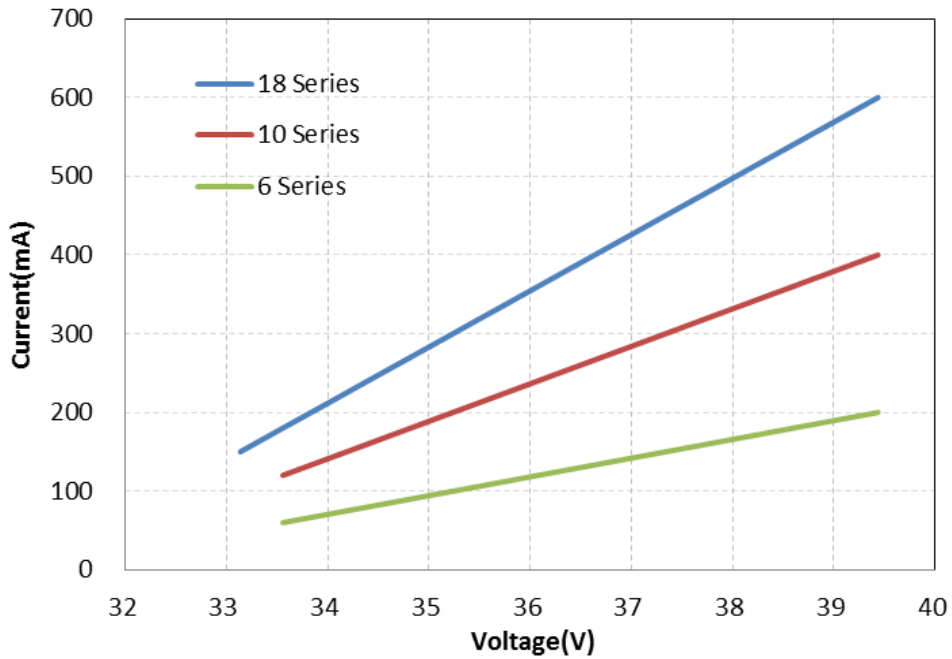


### 4.6 Forward Current Degrading Curve

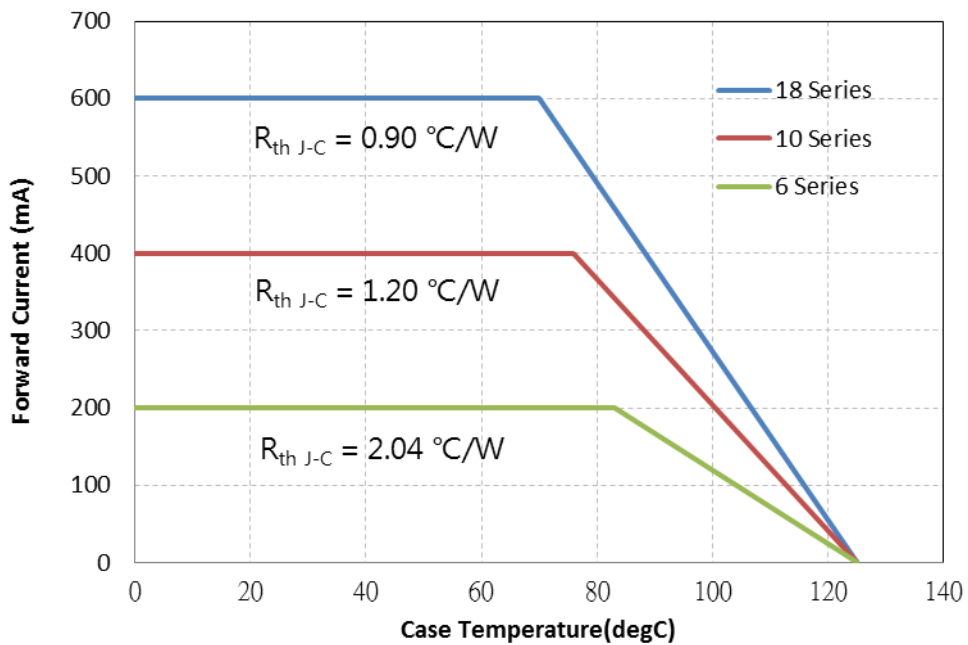


**SPECIFIC LIGHTING  
M08 CoB Product Series**

**4.7 Relative Intensity vs. Case Temperature**

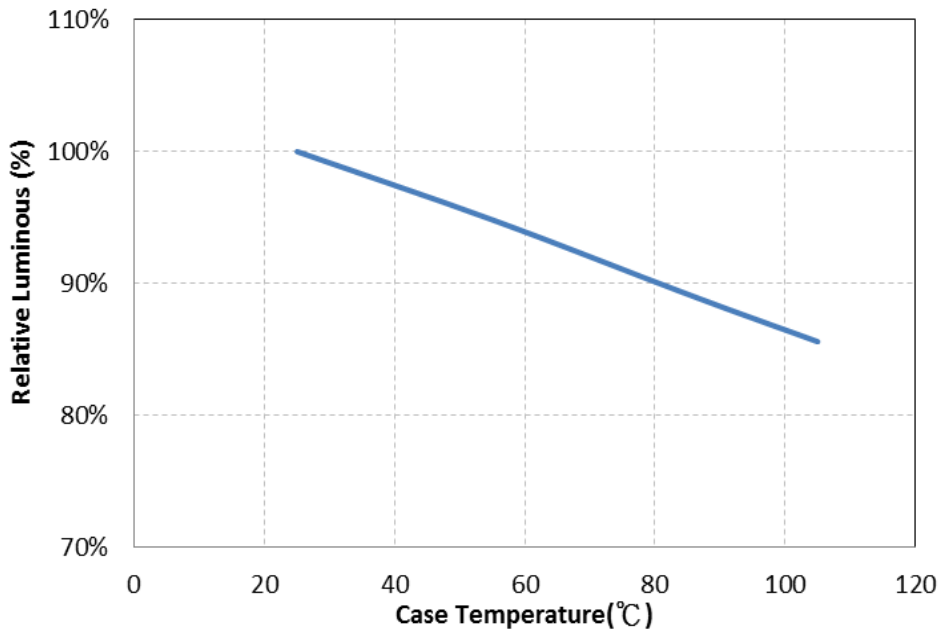

**4.8 Forward Voltage vs. Case Temperature**

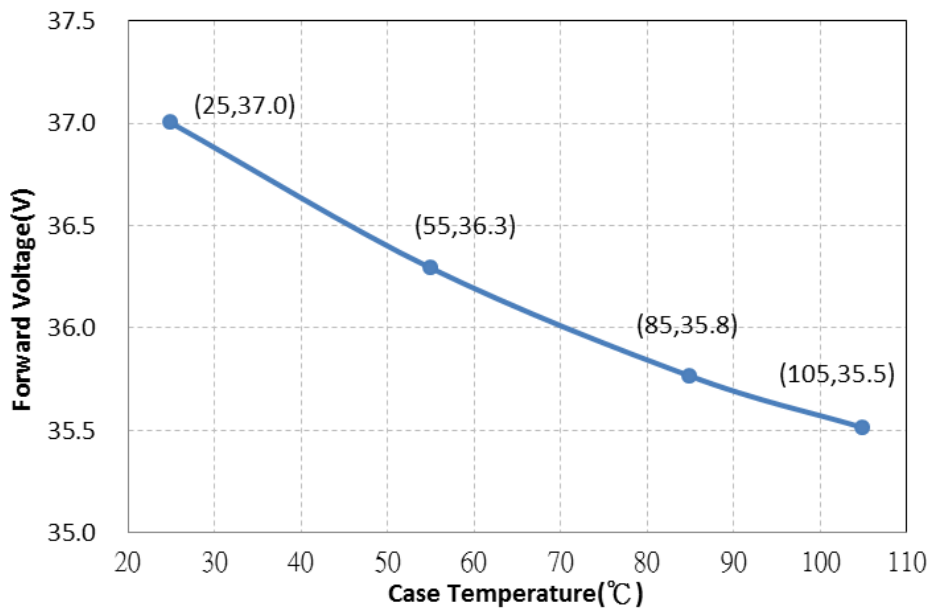


# SPECIFIC LIGHTING M08 CoB Product Series

## 5. CoB Binning Definition

### Flux Binning Parameter (25degC)

Lumen CODE List of M08 Series Product			
Parameter	Code	Unit	Lumen
Luminous Flux	C	lm	495
	D		535
	E		580
	F		625
	G		675
	H		730
	I		790
	J		850
	K		920
	L		990
	M		1070
	N		1155
	O		1245
	P		1345
	Q		1455
	R		1570
	S		1695
	T		1830
	U		1975
	V		2130

### Example of M08 Series Product Bin (2700K 06 series)

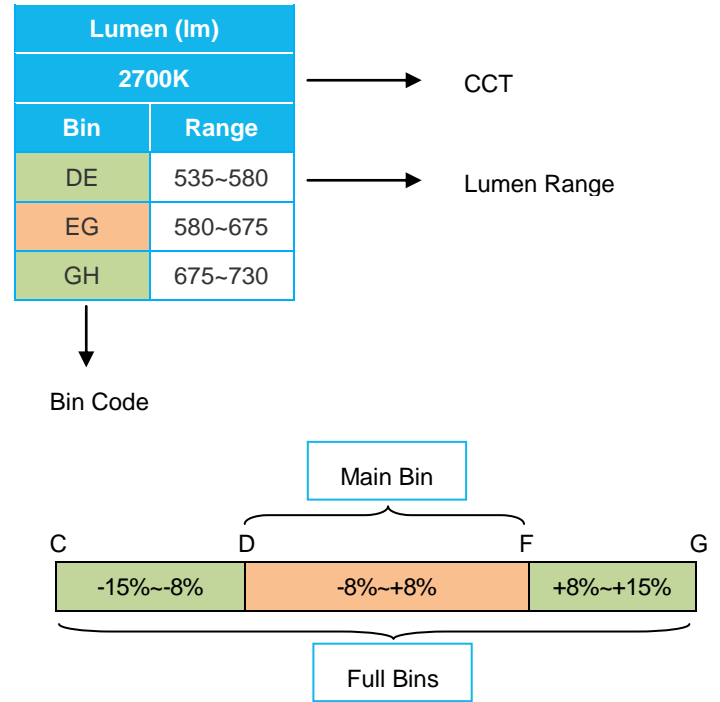

## SPECIFIC LIGHTING M08 CoB Product Series

### ■ 06 Series Lumen Bin

Lumen (lm)							
CRI 80						CRI 90	
2700K		3000K		4000K		3000K	
Bin	Range	Bin	Range	Bin	Range	Bin	Range
DE	535~580	DE	535~580	EF	580~625	BC	460~495
EG	580~675	EG	580~675	FH	625~730	CE	495~580
GH	675~730	GH	675~730	HI	730~790	EF	580~625

### ■ 10 Series Lumen Bin


Lumen (lm)							
CRI 80						CRI 90	
2700K		3000K		4000K		3000K	
Bin	Range	Bin	Range	Bin	Range	Bin	Range
LM	990~1070	LM	990~1070	MN	1070~1155	JK	850~920
MO	1070~1245	MO	1070~1245	NP	1155~1345	KM	920~1070
OP	1245~1345	OP	1245~1345	PQ	1345~1455	MN	1070~1155

### ■ 18 Series Lumen Bin

Lumen (lm)							
CRI 80						CRI 90	
2700K		3000K		4000K		3000K	
Bin	Range	Bin	Range	Bin	Range	Bin	Range
QR	1455~1570	RS	1570~1695	RS	1570~1695	OP	1245~1345
RT	1570~1830	SU	1695~1975	SU	1695~1975	PR	1345~1570
TU	1830~1975	UV	1975~2130	UV	1975~2130	RS	1570~1695

# SPECIFIC LIGHTING M08 CoB Product Series

■ Example of LiteOn CoB MacAdam Ellipse Color Definition (EX: 2700K)

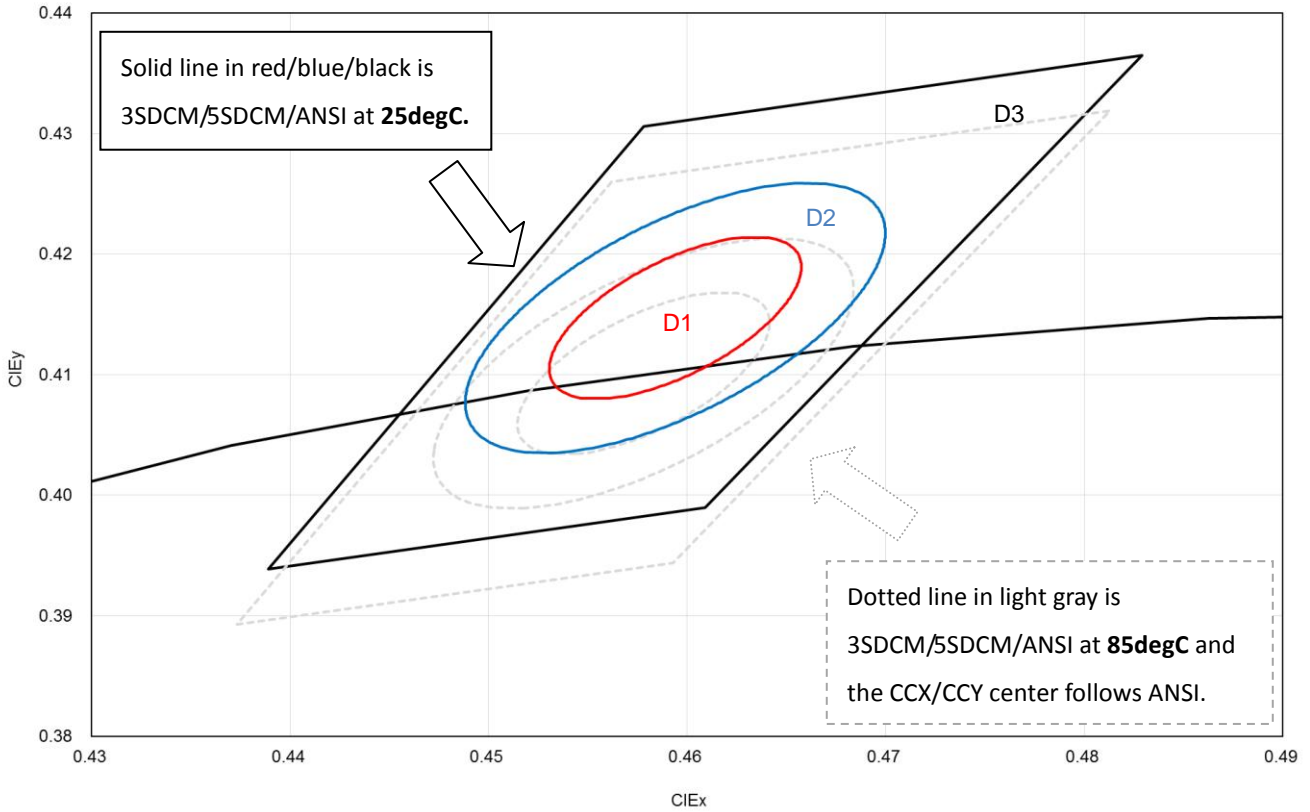


CIE Center Point						
CCT	25degC (LiteOn Spec.)		85degC (ANSI)		Hot/Cold Factor	
	CCX	CCY	CCX	CCY	CCX	CCY
2700	0.4611	0.4137	0.4578	0.4101	-0.0033	-0.0036
3000	0.4381	0.4077	0.4338	0.4030	-0.0043	-0.0047
4000	0.3869	0.3860	0.3818	0.3797	-0.0051	-0.0063

**Notes**


1. LiteOn tester and shipping spec follow the color bin with 25degC CCX/CCY center.
2. The Hot/Cold factor means the CCX/CCY shift from 25degC to 85degC.
3. The Hot/Cold shift is measured by LiteOn CAS 140B instrument system.
4. The ellipse equation expression:  $SDCM = (g11*(x-x_0)^2 + 2*g12*(x-x_0)*(y-y_0) + g22*(y-y_0)^2)^{0.5}$

**SPECIFIC LIGHTING  
M08 CoB Product Series**

■ M08 2700K

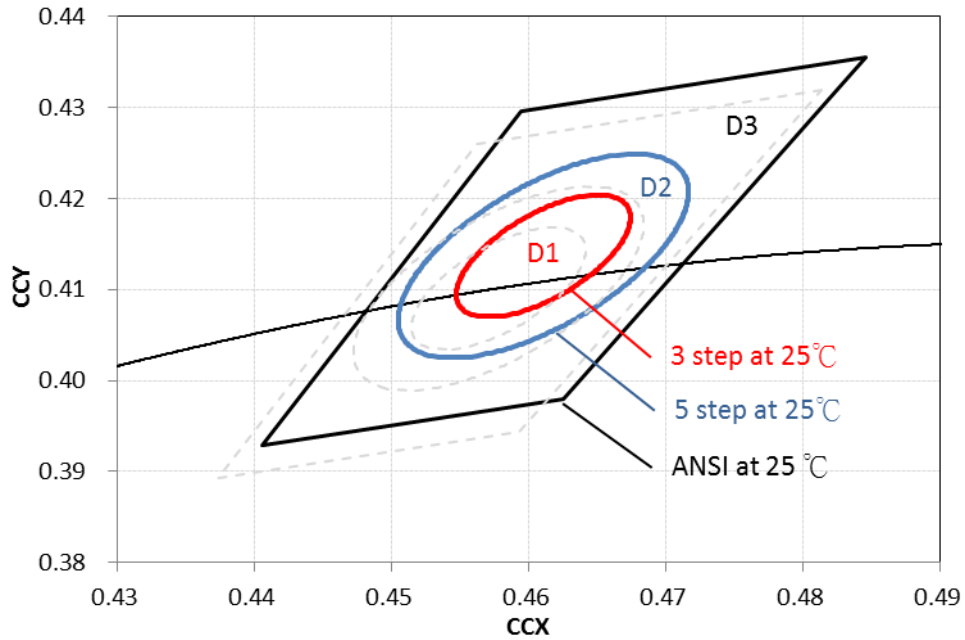


■ M08 3000K

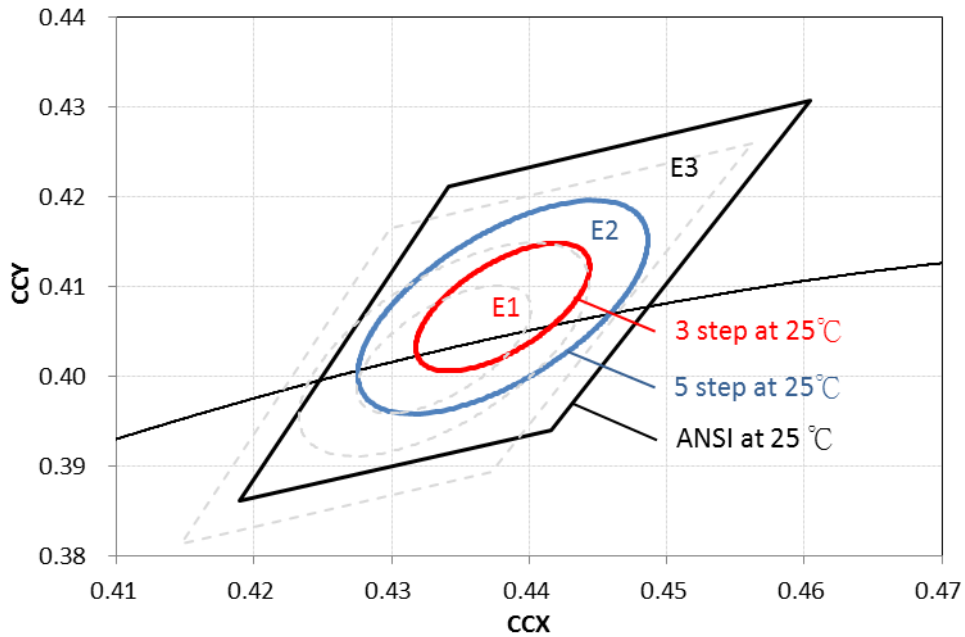



# SPECIFIC LIGHTING M08 CoB Product Series

■ M08 4000K

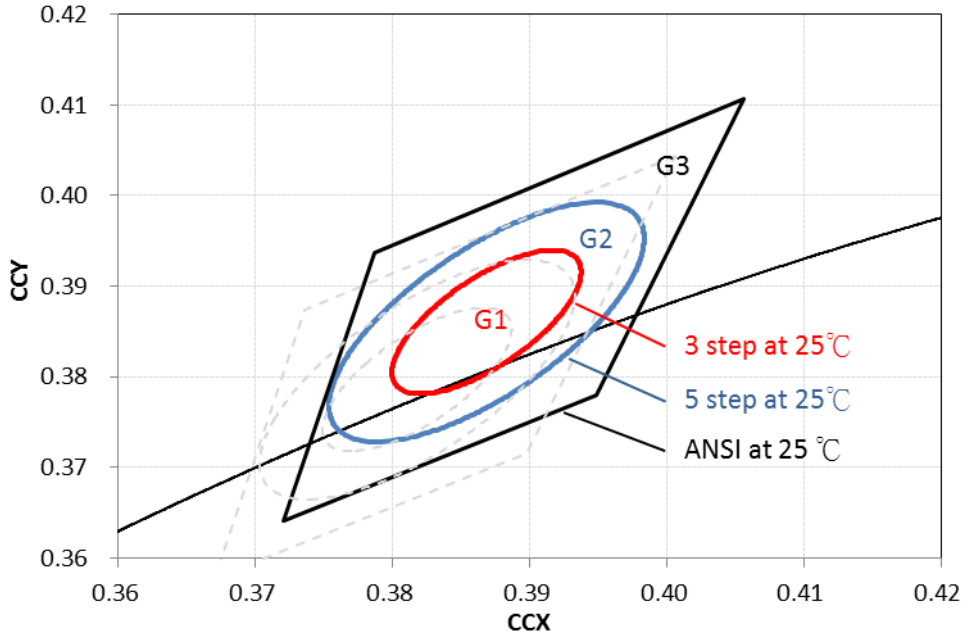

■ Forward Voltage Binning Parameter (25degC)

Parameter	Bin	Symbol	Min	Max	Unit	Condition
Forward Voltage	V1	V <sub>F</sub>	33	42.0	V	I <sub>F</sub> = Typical Current

**Note:**

1. Full Rank on Label. ( Example: V1/EG/D1 )

Forward Voltage Rank	Luminous Flux Rank	Color Rank
V1	EG	D1

## SPECIFIC LIGHTING M08 CoB Product Series

### 6. Reliability Test Plan

No	Test item	Condition	Duration	Result
1	High Temperature Operating Life	Tc=85°C, IF=Typical Current	1K hours	Pass
2	Wet High Temperature Operating Life	60°C/90%RH, IF=Typical Current(DC) 30 min ON/OFF	1K hours	Pass
3	Thermal Shock	-40°C to 125°C, 15minutes dwell, <10 seconds transfer, measurement in every 250 cycle	500 cycles	Pass
4	Fast Switch Cycling Test	40000cycles, 2 mins On/Off, Room temperature(25°C+/-5C), measurement in every 5000 cycle	40K cycles	Pass
5	High Temperature Storage Life	Ta=120°C	1K hours	Pass
6	Low Temperature Storage Life	Ta=-55°C	1K hours	Pass
7	Mechanical Shock	1500G, 0.5ms pulse, 5 shocks each 6 axis	30 Times (5 shocks each 6 axis)	Pass
8	Variable Vibration Frequency	10-2000-10 Hz, log or linear sweep rate, 20G for approximately minute 1.5mm, each applied three times per axis over 6 hrs.	18 hrs (three times per axis over 6 hrs.)	Pass

Criteria for Judging the Damage


Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	IF=Typical Current		U.S.L. x 1.1
Luminous Flux	Lm	IF=Typical Current	L.S.L. x 0.7	
CCX&CCY	X,Y	IF=Typical Current		Shift<0.02

Notes:

1. Operating life test are mounted on thermal heat sink
2. Storage item are only component, not put on heat sink.

## SPECIFIC LIGHTING M08 CoB Product Series


### 7. Packing Specifications

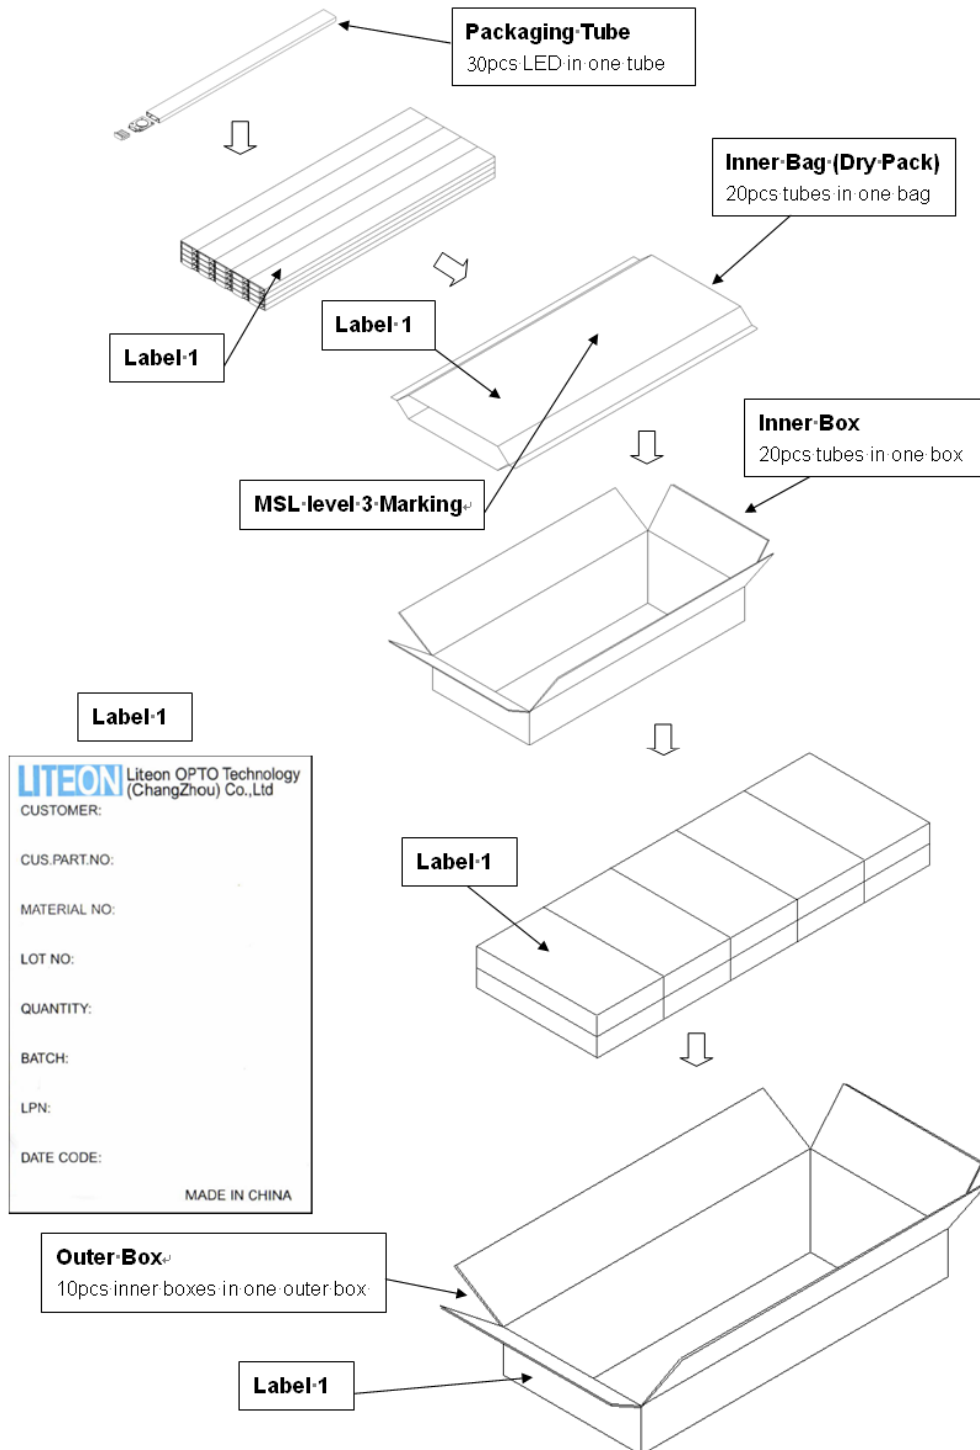

## SPECIFIC LIGHTING M08 CoB Product Series

### 8. Cautions

**8.1** An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in circuit below.



(A) Recommended circuit.

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

**8.2** Do not put any pressure on the light emitting surface either by finger or any hand tool and do not stack the COB products. Stress or pressure may cause damage to the wires of the LED array.

**8.3** This product is not designed for the use under any of the following conditions, please confirm the performance and reliability are well enough if you use it under any of the following conditions

- Do not use sulfur-containing materials in commercial products including the materials such as seals and adhesives that may contain sulfur.
- Do not put this product in a place with a lot of moisture (over 85% relative humidity), dew condensation, briny air, and corrosive gas (Cl, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>x</sub>, etc.), exposure to a corrosive environment may affect silver plating.

#### 8.4 Storage

Before opening inner bag, the storage ambient for the LEDs should not exceed 30°C temperature and 85% relative humidity.

After opening inner bag, the storage ambient for the LEDs should not exceed 30°C temperature and 70% relative humidity.

It is recommended that LEDs out of their original packaging are soldered within one week.

For extended storage out of their original packaging, it is recommended that the LEDs were stored in a sealed container (aluminum moisture proof bag) with appropriate desiccant (moisture absorbent material, such as silica gel) and humidity indicator card. When humidity indicator card changed color, or LEDs stored out of their original packaging for more than a week, LEDs should be baked at about 60°C for at least 24 hours before soldered.

## SPECIFIC LIGHTING M08 CoB Product Series

### ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or “no light up” at low currents.

To verify for ESD damage, check for “light up” and  $V_F$  of the suspect LEDs at low currents.