


ZWS75BAF-12/A



| Sales Region | Worldwide | _ |
|-----------------------|-----------------------------|------|
| Series | ZWS-BAF | |
| Status | Production | |
| Feature | | · 21 |
| Option | With cover type | · |
| Option Lineup | Please refer to here. | - |
| Recommended EMC Filte | er Please refer to here. | |
| Accessories | Please refer to the catalog | - |

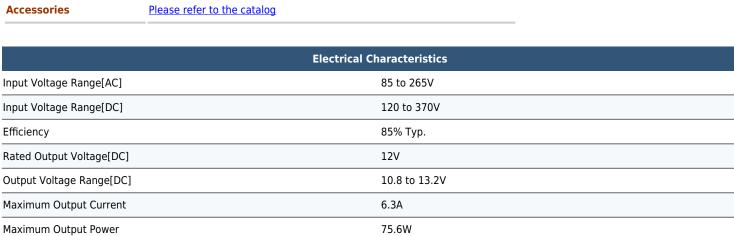

| Cases Shape & Size | | |
|--------------------|------------|--|
| Case'] shape | PC board | |
| Width(W) | 60mm Nom. | |
| Height(H) | 45mm Nom. | |
| Depth(D) | 180mm Nom. | |
| Weight | 380g Typ. | |

| Other | | |
|----------------------------|--|--|
| Operating Temp. Range | -10 to 60°C | |
| Cooling | Convection cooling | |
| | UL60950-1 | |
| | CSA C22.2 No.60950-1 | |
| Safety Standard(Certified) | EN60950-1 | |
| | EN50178 (OV II) | |
| Safety Standard(Conformed) | Den-an | |
| Devende | This page only shows representative characteristics. Please refer to the | |
| Remarks | technical data for detailed specifications and conditions. | |

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.