

# Keysight Technologies

## N4974A PRBS Generator 44 Gb/s

Data Sheet



## Description

The Keysight Technologies, Inc. N4974A PRBS generator 44 Gb/s is a self-contained pattern generator capable of operating at either a single fixed-frequency bit rate using the internal oscillator or operating over a wider frequency range when used with an external half-rate clock source. The N4974A PRBS generator 44 Gb/s operates from 22 to 44 Gb/s when used with an external clock or at 39.81312 Gb/s when used with the internal oscillator. The generator is also available with two more internal oscillator choices, operating at either 25.78125 or 28.0 Gb/s.

The N4974A PRBS generator 44 Gb/s source is based on custom ASICs, allowing a high degree of integration. The low parts count in the signal path minimizes the degradation of the low phase noise oscillator, providing an extremely clean eye pattern. Utilizing the internal oscillator, the generator achieves world class performance of 500 fs rms jitter, with a 500 mV output amplitude and 8 ps rise time.

## Application

The N4974A PRBS generator 44 Gb/s source is designed to be used as the source for testing ultra-high speed communications components such as those used in OC 768/STM 256 applications. The 40G PRBS source is a perfect companion to a digital communication analyzer in a stimulus response measurement for 40 Gb/s components such as driver amplifiers, transimpedance amplifiers, optical modulators, and DEMUX. Other applications include backplane signal integrity testing, and cable testing.

## Features

- Self-contained PRBS generator
- Built-in low jitter oscillator for 40 Gb/s, 28 Gb/s, or 25 Gb/s rates
- 22-44 Gb/s rates with external clock
- True PRBS-7, PRBS-15 and PRBS-31 patterns
- 1000 mV differential output
- Clock trigger provided for precision time base applications
- External clock input
- Pattern trigger output
- Small size (8" x 10" x 2.5")



Figure 1. Front of N4974A PRBS generator 44 Gb/s



Figure 2. Back of N4974A PRBS generator 44 Gb/s showing the pattern control switches, clock inputs and outputs, and trigger outputs.

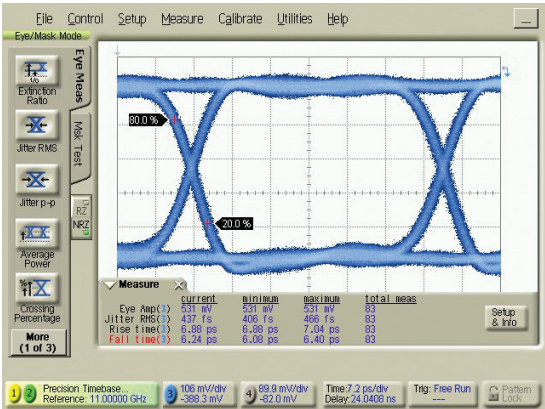


Figure 3. 22 Gb/s

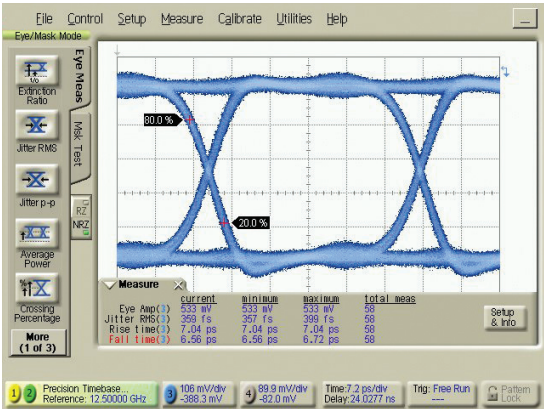


Figure 4. 25 Gb/s

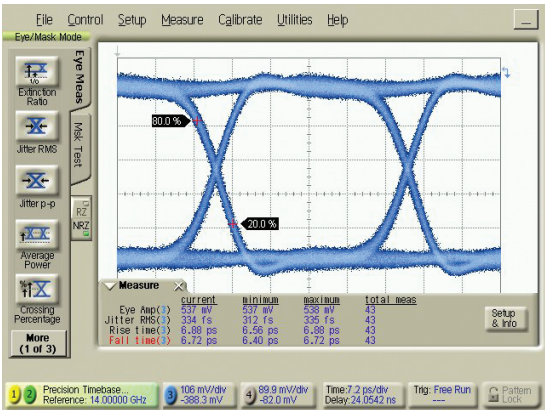


Figure 5. 28 Gb/s

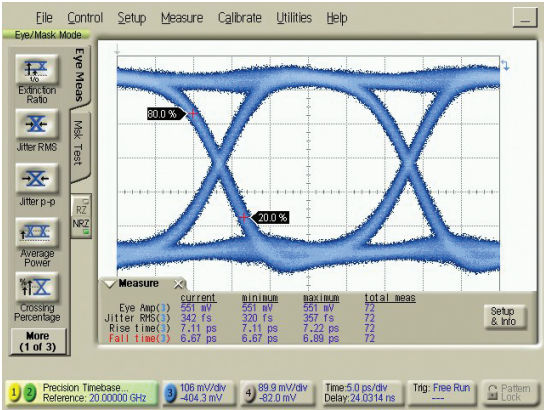


Figure 6. 40 Gb/s

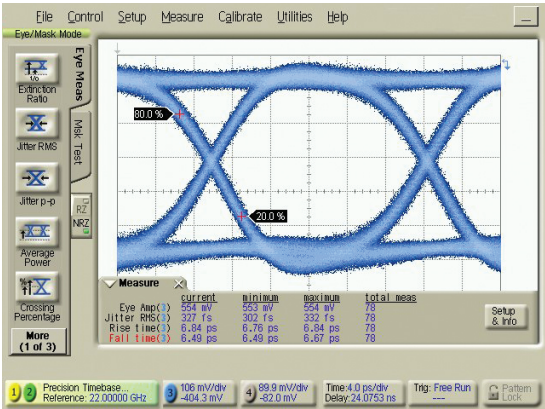


Figure 7. 44 Gb/s

## N4974A PRBS generator specifications

|                                     |                                               |                                                                                                 |
|-------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------|
| Data output                         | Data rate                                     | 22 to 44 Gb/s <sup>1</sup> (option 001)                                                         |
|                                     | PRBS patterns                                 | $2^7-1 : 1 + X^4 + X^7$                                                                         |
|                                     |                                               | $2^{15}-1 : 1 + X^{14} + X^{15}$                                                                |
|                                     |                                               | $2^{31}-1 : 1 + X^{28} + X^{31}$                                                                |
|                                     | Output amplitude (single-ended)               | > 500 mV p-p typical                                                                            |
|                                     | Output level                                  | high: 0 V nominal                                                                               |
|                                     |                                               | low: –500 mV nominal                                                                            |
|                                     | Jitter                                        | 500 fs rms typical <sup>2</sup>                                                                 |
|                                     | Rise/fall time (20% to 80%)                   | 8 ps typical                                                                                    |
|                                     | Data crossover                                | 55% typical                                                                                     |
| Clock input                         | Data phase adjust range                       | 30 ps nominal                                                                                   |
|                                     | External interface                            | Differential. DC coupled, 50 $\Omega$ nominal, 1.85 mm female connectors                        |
|                                     |                                               | Note: outputs are CML and must be externally DC terminated with 50 $\Omega$ to GND.             |
|                                     |                                               |                                                                                                 |
| Internal clock                      | External half-rate clock input range          | 11 to 22 GHz (option 001)                                                                       |
|                                     | External half-rate clock input power required | +10 to +16 dBm                                                                                  |
|                                     | External interface                            | Single-ended. AC coupled, 50 $\Omega$ nominal, 2.92 mm female connector                         |
| Clock trigger output                | Internal half-rate clock frequency            | Single frequency internal oscillator, specify when ordering                                     |
|                                     |                                               | Default – 19.90656 GHz (for 39.81312 Gb/s data rate)                                            |
|                                     |                                               | Option 101 – 12.890625 GHz (for 25.78125 Gb/s data rate)                                        |
|                                     |                                               | Option 102 – 14.0 GHz (for 28.0 Gb/s data rate)                                                 |
| Pattern trigger output <sup>3</sup> | Output power                                  | +16 dBm (4 V p-p) typical                                                                       |
|                                     | External interface                            | Single-ended. AC coupled, 50 $\Omega$ nominal, 2.92 mm female connector                         |
|                                     | Clock trigger (CLK/1) output power            | Nominally –16 dB less than Clock Input power                                                    |
| Pattern trigger output <sup>3</sup> | External interface                            | Single-ended. AC coupled, 50 $\Omega$ nominal, 2.92 mm female connector. Terminate if not used. |
|                                     | Pulse width                                   | 64 * (1/Bit_rate) e.g. at 40 Gb/s pulse width = 1.6 ns                                          |
|                                     | Repetition period                             | 64 * (1/Bit_rate)*Pattern_length e.g. at 40 Gb/s, $2^{31}-1$ pattern, period = 3.4 s            |
|                                     | Output amplitude                              | 200 mV p-p typical                                                                              |
| Pattern trigger output <sup>3</sup> | External interface                            | Single-ended. DC coupled, 50 $\Omega$ nominal, SMA female connector                             |

1. With an external clock

2. At  $\leq 40$  Gb/s.3. Pattern trigger specified at  $\leq 40$  Gb/s only. Remove termination from CLK/1 output when using the Pattern Trigger.

## General and mechanical parameters

|                                 |                                                                       |
|---------------------------------|-----------------------------------------------------------------------|
| Operating temperature           | +10 to +40 °C                                                         |
| Storage temperature             | –40 to +70 °C                                                         |
| Power requirements              | 42 W external AC adaptor (included)<br>· 100 to 240 V AC, 47 to 63 Hz |
| Physical dimensions (W x H x D) | 203 mm (8 in) x 63.5 mm (2.5 in) x 254 mm (10 in)                     |

## Regulatory standards

### EMC

- Complies with European EMC Directive 2004/108/EC
- IEC/EN-61326-1
- CISPR Pub 11 Group 1, class A
- AS/NZS CISPR 11
- ICES/NMB-001

This ISM device complies with Canadian ICES-001.  
Cet appareil ISM est conforme à la norme NMB-001 du Canada.

## Ordering information

| Model number | Description                                                                        |
|--------------|------------------------------------------------------------------------------------|
| N4974A-001   | 22 to 44 Gb/s data rate operation, internal oscillator for 39.81312 Gb/s data rate |
| N4974A-101   | Internal oscillator for 25.78125 Gb/s data rate                                    |
| N4974A-102   | Internal oscillator for 28.0 Gb/s data rate                                        |

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

### Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

### Europe & Middle East

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 0800 000154   |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-07-10-14)

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.axiestandard.org](http://www.axiestandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2008  
 Quality Management System

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/N4974A](http://www.keysight.com/find/N4974A)